

# **ElmerSolver Manual**

Juha Ruokolainen, Mika Malinen, Peter Råback,  
Thomas Zwinger, Antti Pursula and Mikko Byckling

CSC – IT Center for Science

Oct 20, 2014

# ElmerSolver Manual

## About this document

The ElmerSolver Manual is part of the documentation of Elmer finite element software. ElmerSolver Manual describes the Elmer Solver options common for all specific equation solvers. The different equations solver options are described separately in Elmer Models Manual. The ElmerSolver Manual is best used as a reference manual rather than a concise introduction to the matter.

The present manual corresponds to Elmer software version 7.0 for Windows NT and Unix platforms. The latest documentation and program versions of Elmer are available (or links are provided) at

`http://www.csc.fi/elmer`.

## Copyright information

The original copyright of this document belongs to CSC – IT Center for Science, Finland, 1995–2009. This document is licensed under the Creative Commons Attribution-No Derivative Works 3.0 License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-nd/3.0/>.

Elmer program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version. Elmer software is distributed in the hope that it will be useful, but without any warranty. See the GNU General Public License for more details.

Elmer includes a number of libraries licensed also under free licensing schemes compatible with the GPL license. For their details see the copyright notices in the source files.

All information and specifications given in this document have been carefully prepared by the best efforts of CSC, and are believed to be true and accurate as of time writing. CSC assumes no responsibility or liability on any errors or inaccuracies in Elmer software or documentation. CSC reserves the right to modify Elmer software and documentation without notice.

# Contents

<b>Table of Contents</b>	<b>3</b>
<b>1 Solving a multiphysics problem with the solver of Elmer: Fundamentals</b>	<b>6</b>
1.1 Basic concepts . . . . .	6
1.2 Handling interactions of multiple physical phenomena . . . . .	7
1.3 The key abilities . . . . .	8
<b>2 Structure of the Solver Input File</b>	<b>10</b>
2.1 Introduction . . . . .	10
2.2 The sections of solver input file . . . . .	10
2.3 Keyword syntax . . . . .	14
2.4 Running several sequences . . . . .	17
<b>3 Restart from existing solutions</b>	<b>18</b>
3.1 Restart file . . . . .	18
3.2 Initialization of dependent variables . . . . .	19
<b>4 Solution methods for linear systems</b>	<b>21</b>
4.1 Introduction . . . . .	21
4.2 Direct methods . . . . .	21
4.3 Preconditioned Krylov methods . . . . .	22
4.4 Multilevel methods . . . . .	23
4.5 Preconditioning via inner iterations . . . . .	25
4.6 Keywords related to linear system solvers . . . . .	26
4.7 Implementation issues . . . . .	30
Bibliography . . . . .	32
<b>5 Nonlinear System Options</b>	<b>33</b>
5.1 Introduction . . . . .	33
5.2 Keywords related to solution of nonlinear systems . . . . .	33
<b>6 Integration of time-dependent systems</b>	<b>36</b>
6.1 Introduction . . . . .	36
6.2 Time discretization strategies . . . . .	36
6.3 Keywords related to time discretization . . . . .	37
6.4 On the treatment of time derivatives in Elmer Solver code . . . . .	39
<b>7 Solving eigenvalue problems</b>	<b>40</b>
7.1 Introduction . . . . .	40
7.2 Theory . . . . .	40
7.3 Keywords related to eigenvalue problems . . . . .	41
7.4 Constructing matrices M and D in Solver code . . . . .	43

<b>8</b>	<b>Generic solver utilities</b>	<b>44</b>
8.1	Solver activation . . . . .	44
8.2	Variable names . . . . .	44
8.3	Exported variables . . . . .	45
8.4	Dirichlet conditions . . . . .	45
8.5	Soft Limiters . . . . .	47
8.6	Periodic conditions . . . . .	47
8.7	Mortar conditions . . . . .	48
8.8	Setting nodal loads . . . . .	51
8.9	Computing nodal loads . . . . .	51
8.10	Energy norm . . . . .	52
8.11	Computing nodal weights . . . . .	52
8.12	Active and passive elements . . . . .	52
8.13	Timing the solvers . . . . .	52
<b>9</b>	<b>Meshing Utilities</b>	<b>54</b>
9.1	Coordinate transformation . . . . .	54
9.2	Mesh multiplication . . . . .	55
9.3	Mesh extrusion . . . . .	55
9.4	Discontinuous interfaces . . . . .	57
<b>10</b>	<b>Adaptive Solution</b>	<b>58</b>
10.1	Introduction . . . . .	58
10.2	Theory . . . . .	58
10.3	Keywords related to the adaptive solution . . . . .	60
10.4	Implementing own error estimators . . . . .	60
<b>11</b>	<b>Parallel runs</b>	<b>63</b>
11.1	Introduction . . . . .	63
11.2	Preprocessing of Parallel Runs . . . . .	64
11.3	Parallel Computations in Elmer . . . . .	67
11.4	Post-processing of Parallel Runs . . . . .	72
<b>12</b>	<b>Compilation and Linking</b>	<b>74</b>
12.1	Compiling the whole package . . . . .	74
12.2	Compiling a user defined subroutine . . . . .	75
<b>13</b>	<b>Basic Programming</b>	<b>76</b>
13.1	Introduction . . . . .	76
13.2	Basic Elmer Functions and Structures . . . . .	76
13.3	Writing a User Function . . . . .	84
13.4	Writing a Solver . . . . .	96
13.5	Compilation and Linking of User Defined Routines/Functions . . . . .	108
<b>A</b>	<b>Format of mesh files</b>	<b>109</b>
A.1	The format of header file . . . . .	109
A.2	The format of node file . . . . .	109
A.3	The format of element file . . . . .	110
A.4	The format of boundary element file . . . . .	110
A.5	The format of shared nodes file . . . . .	110
A.6	Exceptions on parallel mesh format . . . . .	111

<b>B</b>	<b>Format of result output files</b>	<b>112</b>
B.1	Format versions . . . . .	112
B.2	General structure . . . . .	112
B.3	The positions file . . . . .	115
<b>C</b>	<b>Format of ElmerPost Input File</b>	<b>116</b>
<b>D</b>	<b>Basic element types</b>	<b>118</b>
<b>E</b>	<b>Higher-order finite elements</b>	<b>121</b>
E.1	Theory . . . . .	121
E.2	Higher-order elements in Elmer . . . . .	122
E.3	ElmerSolver services for higher-order elements . . . . .	124
E.4	Higher-order elements . . . . .	126
E.5	Line . . . . .	126
E.6	Quadrilateral . . . . .	127
E.7	Triangle . . . . .	128
E.8	Brick . . . . .	129
E.9	Tetrahedron . . . . .	131
E.10	Pyramid . . . . .	132
E.11	Wedge . . . . .	134
	Bibliography . . . . .	136
<b>F</b>	<b>Face and edge elements</b>	<b>137</b>
F.1	The construction of face element interpolation . . . . .	137
F.2	The construction of edge element interpolation . . . . .	141
	Bibliography . . . . .	143
	<b>Index</b>	<b>144</b>

# Chapter 1

## Solving a multiphysics problem with the solver of Elmer: Fundamentals

Elmer software has been developed multiphysics simulations in mind. Thus, in addition to offering ways to produce computational solutions to single-physics models (the available collection of which is described in the Elmer Models Manual), Elmer provides procedures for creating computational models which describe interactions of multiple physical phenomena. Our intention here is to give an overview how this functionality is built into the solver of Elmer associated with the independent program executable ElmerSolver.

### 1.1 Basic concepts

The models handled by Elmer may generally be stationary or evolutionary, with nonlinearities possible in both the cases. Starting from the weak formulation of the problem, finite element approximation and advancing in time with implicit methods are typically applied in order to obtain the computational version of the model. In the simplest case of single-physics models we are then lead to solving equations

$$F(u) = 0, \quad (1.1)$$

where  $u$  represents either the vector of coefficients in the finite element expansion of the stationary solution or the coefficient vector to describe the evolutionary finite element solution at a given time  $t = t_k$ . Thus, in the case of evolution, the problems of the type (1.1) are solved repeatedly when advancing in time.

For linear models the problem (1.1) reduces to solving a linear system via defining

$$F(u) = b - Ku$$

where the coefficient matrix  $K$  is referred to as the stiffness matrix and  $b$  corresponds to the right-hand side vector in the linear system. Otherwise  $F$  is a nonlinear mapping and an iteration is needed to handle the solution of the problem (1.1). Available nonlinear iteration methods generally depend on the model, as the definition of the linearization strategy is a part of the computational description of each physical model.

We note that many single-physics models offer the possibility of using the Newton iteration where the current nonlinear iterate  $u^{(m)}$  to approximate  $u$  is updated at each iteration step as

$$\begin{aligned} DF(u^{(m)})[\delta^{(m)}] &= -F(u^{(m)}), \\ u^{(m+1)} &= u^{(m)} + \delta^{(m)}, \end{aligned} \quad (1.2)$$

where  $DF(u^{(m)})$  is the derivative of  $F$  at  $u^{(m)}$ . Thus, performing the nonlinear solution update again entails the solution of the linear system at each iteration step. As an alternate to the Newton method, linearization strategies based on lagged-value approximations are also often available. In addition, relaxation is conventionally offered as a way to enable convergence in cases where the basic nonlinear iteration fails

to produce convergence. Given the current nonlinear iterate  $u^{(m)}$  and a computed correction  $\delta u^{(m)}$  to the approximation, the new nonlinear iterate is then defined by

$$u^{(m+1)} = u^{(m)} + \lambda^{(m)} \delta u^{(m)},$$

where  $\lambda^{(m)}$  is an adjustable parameter referred to as the relaxation parameter.

## 1.2 Handling interactions of multiple physical phenomena

Having considered the basic concepts in the context of single-physics models, we now proceed to describe how the modularity employed in the design of Elmer allows us to create models which represent interactions of multiple physical phenomena. To this end, we assume that the complete model describes the interaction of  $N$  constituent models, the computational versions of which are primarily associated with the coefficient vectors  $u_i$ ,  $i = 1, 2, \dots, N$ . As before, the coefficients contained in  $u_i$  are associated with the finite element expansion of either the stationary solution or the evolutionary solution at a time level  $t = t_k$ .

The fully discrete version of the coupled model leads to handling a problem of the form

$$\begin{aligned} F_1(u_1, u_2, \dots, u_N) &= 0, \\ F_2(u_1, u_2, \dots, u_N) &= 0, \\ &\dots \\ F_N(u_1, u_2, \dots, u_N) &= 0. \end{aligned} \tag{1.3}$$

If all the constituent models are linear, the problem (1.3) corresponds to solving the linear system where the coefficient matrix is a  $N \times N$  block matrix. Otherwise (1.3) describes a nonlinear problem. Although the solution of (1.3) could in principle be done in the same way as explained in the context of single-physics models in Section 1.1, i.e. by performing either a coupled linear solve or Newton iteration, the coupled problems have usually been handled differently in order to enable the reuse of solvers for single-physics models and the easy extendability of the code to handle new applications.

To this end, the nonlinear Gauss-Seidel iteration is usually applied, so that the coupling of the models is resolved via generating new coupled system iterates  $u^{(j)} = (u_1^{(j)}, u_2^{(j)}, \dots, u_N^{(j)})$  as

$$\begin{aligned} F_1(u_1^{(j)}, u_2^{(j-1)}, u_3^{(j-1)}, \dots, u_N^{(j-1)}) &= 0, \\ F_2(u_1^{(j)}, u_2^{(j)}, u_3^{(j-1)}, \dots, u_N^{(j-1)}) &= 0, \\ &\dots \\ F_N(u_1^{(j)}, u_2^{(j)}, \dots, u_N^{(j)}) &= 0. \end{aligned} \tag{1.4}$$

It is noted that the  $k$ th discrete model description in (1.4) depends implicitly only on the coupled system iterate to its primary variable  $u_k$ , while the dependencies on the other constituent model variables are treated explicitly. This brings us to solving a nonlinear single-field problem

$$F(u_k^{(j)}) = F_k(v_1, \dots, v_{k-1}, u_k^{(j)}, v_{k+1}, \dots, v_N) = 0, \text{ with all } v_j \text{ given,} \tag{1.5}$$

which is handled by using the methods already described in Section 1.1. We also note that if all the constituent models are linear the nonlinear Gauss-Seidel iteration (1.4) reduces to the block Gauss-Seidel iteration for linear systems. Relaxation may again be applied as an attempt to improve the convergence behaviour of the basic iteration (1.4).

It is good to pause here to stress that the main advantage of the adopted nonlinear Gauss-Seidel scheme is its support for the modular software design. Also, it brings us to handling coupled problems via solving linear systems which are smaller than those which would result from treating all constraints in (1.3) simultaneously. Despite these merits, the suitability of the loosely coupled iteration (1.4) generally is case-dependent as convergence problems may occur in cases where a strong physical coupling is involved. Such problems are often best handled by methods which treat all the constituent models in (1.3) simultaneously. Certain physical models available in Elmer indeed employ this alternate tightly coupled solution strategy. However,

these models have initially been developed independently, as common Elmer utilities for creating tightly coupled iteration methods in a general manner are less developed.

To summarize, the following pseudo-code presentation describes the basic loosely coupled iteration scheme employed by the solver of Elmer. This rough description may be helpful in summarizing what needs to be controlled overall to create a working computational solution procedure for a coupled problem.

! The time integration loop

**for**  $k = 1 : M$

Generate an initial guess  $u^{(0)} = (u_1^{(0)}, u_2^{(0)}, \dots, u_N^{(0)})$  for the coupled system solution at  $t = t_k$

! The nonlinear Gauss-Seidel iteration

**for**  $j = 1, 2, \dots$

! Generate the next coupled system iterate  $u^{(j)}$  by performing single-field updates

**for**  $i = 1 : N$

Set  $v_l = u_l^{(j)}$  for  $l = 1, 2, \dots, i - 1$

Set  $v_l = u_l^{(j-1)}$  for  $l = i + 1 : N$

Perform nonlinear iteration to solve  $F_i(v_1, \dots, v_{i-1}, u_i^{(j)}, v_{i+1}, \dots, v_N) = 0$

Apply relaxation to set  $u_i^{(j)} := u_i^{(j-1)} + \alpha_i(u_i^{(j)} - u_i^{(j-1)})$

**end**

**end**

**end**

Here the descriptions of the termination criteria for the iterations have been omitted. It is also noted that, obviously, the time integration loop is not needed in the case of a stationary problem. On the other hand, in the case of stationary simulation it is possible to replace the time integration loop by a pseudo-version of time stepping to enable performing multiple solutions for a range of model parameter values.

## 1.3 The key abilities

In the following, we give some additional information on the key abilities of the solver of Elmer to create computational solution procedures.

### 1.3.1 Extendability by modular design

A module of the Elmer software which enables the creation of the discrete model description of the type (1.5) and its solution with respect to the primary variable is generally called a solver. The solvers of Elmer are truly modular in this manner and have a standard interface. Thus, each solver usually contains an implementation of the nonlinear iteration, instructions to assemble the corresponding linear systems from elementwise contributions, and standard subroutine invocations to actually solve the linear systems assembled.

It follows that enabling an interaction with another field, designated by  $v_j$  in (1.5), is simply a matter of solver-level implementation. Therefore, interactions which have not been implemented yet can be enabled by making modifications which are localized to the solvers. In addition, a completely new physical model may be added by introducing a new solver which comprises a separate software module and which can be developed independently with respect to the main program. As a result, a loosely coupled solution procedure for a coupled problem based on the new physical model may again be achieved by making only solver-level modifications.

### 1.3.2 Model-specific finite element approximation

In the most basic setting all constituent model variables  $u_i$ ,  $i = 1, \dots, N$ , of a coupled problem are approximated by using the same piecewise polynomial basis functions defined over a single mesh. In addition to this, the solver of Elmer offers a built-in functionality to perform a coupled problem simulation by using solver-specific finite element meshes. The solver description is then augmented by the specification of the



independent mesh which the solver uses. To make this functional in connection with the solution of coupled problems, Elmer has the capability of performing the solution data transfer, which is needed between the solvers in the loosely coupled solution procedure, even when the meshes are non-matching. It must be understood, however, that the loss of high-resolution details is unavoidable when the high-resolution field is represented by using a coarser finite element mesh.

### 1.3.3 Approximation by various finite element formulations

Elmer has traditionally employed the Galerkin finite element approximation of weak formulation based on the Lagrange interpolation basis functions. In this connection, the piecewise polynomial approximation of degree  $1 \leq p \leq 3$  is possible for 2-D models, while 3-D models may be discretized by using the elements of degree  $1 \leq p \leq 2$ . The isoparametric mapping to describe curved element shapes is also supported with these traditional elements.

Discrete models based on more recent versions of the Galerkin finite element approximation are also possible. As an alternate to using the standard Lagrange interpolation basis functions, the Galerkin approximation based on using high-degree piecewise polynomials can be employed. In this connection, the degree of polynomial approximation can also be defined elementwise, with Elmer providing an in-built mechanism to guarantee the continuity of any solution candidate, so that in effect the use of the *hp*-version of the finite element method is enabled. However, generic ways to describe curved body surfaces accurately in connection with the high-degree finite elements have not been implemented yet which may limit the utility of these elements.

The way to define the high-degree approximation is based on the idea that a background mesh for representing the standard lowest-degree continuous finite element expansion is first provided so that a specific element type definition in relation to elements present in the background mesh may then be given to enhance the approximation. The same idea has been adapted to create other alternate finite element formulations. For example, finite element formulations which enhance the approximation defined on the background mesh by a subscale approximation spanned by elementwise bubble basis functions can be obtained in this way. We note that this strategy is widely used in Elmer to stabilize otherwise unstable formulations. Another example of the use of the user-supplied element definition relates to creating approximations based on the discontinuous Galerkin method. As a final example we mention that enhancing the approximation on the background mesh by either face or edge degrees of freedom and then omitting the original nodal degrees of freedom is also possible. This leads to a suitable set of unknowns for creating discretizations based on the Raviart-Thomas or edge element interpolation.

### 1.3.4 Parallel computing

A strength of the solver of Elmer is that it supports the use of parallel computing. This opportunity significantly widens the range of problems which can be considered. Additional details on utilizing parallel computers are found elsewhere in this manual.

### 1.3.5 Linear algebra abilities

This exposition should have made it clear that having the ability to solve large linear systems efficiently is a central aspect of the simulation process with Elmer. As explained, in the basic setting a linear solve is needed to obtain the solution update at each step of the nonlinear iteration. In practice linear solves are usually done iteratively, revealing one unexposed iteration level in relation to the pseudo-code presentation in the end of Section 1.2.

The solver of Elmer offers a large selection of strategies to construct linear solvers. The majority of them are directly implemented into Elmer software, but interfaces to exploit external linear algebra libraries are also available. Typically the most demanding aspect in the use of linear solvers relates to identifying an effective preconditioning strategy for the problem at hand. Traditionally Elmer has employed generic preconditioning strategies based on the fully algebraic approach, but recently alternate block preconditioning strategies which typically try to utilize physics-based splittings have also been developed.

## Chapter 2

# Structure of the Solver Input File

### 2.1 Introduction

Solving partial differential equation (PDE) models with the solver of Elmer requires that a precise description of the problem is given using the so-called solver input file, briefly referred to as the `sif` file. This file contains user-prepared input data which specify the location of mesh files and control the selection of physical models, material parameters, boundary conditions, initial conditions, stopping tolerances for iterative solvers, etc. In this chapter, the general structure of the file is described. We explain how the input data is organized into different sections and describe the general keyword syntax which is used in these sections to define the values of various model parameters and to control the solution procedures.

In the case of simple problem setups the solver input file may be written automatically by the preprocessor of Elmer software, so that knowing the solver input file format may be unnecessary. Creating a more complicated setup, or using keywords introduced by the user, however, requires the knowledge of the file format and keyword syntax.

In the following the general structure of the input file is first illustrated by using simple examples, without trying to explain all possibilities in an exhaustive manner. We then describe the keyword syntax in more detail, showing also how model parameters whose values depend on solution fields can be created. The later chapters of this manual, and Elmer Models Manual, which focuses on describing the PDE models Elmer can handle, provide more detailed material on specific issues. Elmer Tutorials also gives complete examples of solver input files.

### 2.2 The sections of solver input file

The material of the solver input file is organized into different sections. Each section is generally started with a row containing the name of the section, followed by a number of keyword commands, and ended with a row containing the word `End`. The names for starting new sections are

- `Header`
- `Simulation`
- `Constants`
- `Body n`
- `Material n`
- `Body Force n`
- `Equation n`

- Solver n
- Boundary Condition n
- Initial Condition n

Here n associated with the section name represents an integer identifier needed for distinguishing between sections of the same type. A basic keyword command included in a section is nothing more than a statement which sets the value of a keyword with an equal sign.

In the following we describe how the sections are basically arranged without trying to explain all possibilities in an exhaustive manner. The later chapters of this manual and Elmer Models Manual provide more detailed material on specific issues. Elmer Tutorials also gives complete examples of solver input files.

### Header section

The location of mesh files is usually given in the header section. Often this is also the only declaration given in the header section. If the Elmer mesh files (see Appendix A) are located in the directory ./mymesh, the header section may simply be

```
Header
  Mesh DB "." "mymesh"
End
```

Note that separate equations can nevertheless be discretized using different meshes if the location of mesh files is given in the solver section described below.

### Simulation section

The simulation section is used for giving general information that is not specific to a particular PDE model involved in the simulation. This information describes the coordinate system used, indicates whether the problem is stationary or evolutionary, defines the file names for outputting, etc. Without trying to describe many possibilities and the details of commands, we only give the following simple example:

```
Simulation
  Coordinate System = "Cartesian 2D"
  Coordinate Mapping(3) = 1 2 3
  Coordinate Scaling = 0.001
  Simulation Type = Steady State
  Steady State Max Iterations = 1
  Output Intervals(1) = 1
  Post File = "case.ep"
  Output File = "case.dat"
End
```

### Constants section

The constants section is used for defining certain physical constants. For example the gravity vector and the Stefan-Boltzmann constant may be defined using the commands

```
Constants
  Gravity(4) = 0 -1 0 9.82
  Stefan Boltzmann = 5.67e-08
End
```

If the constants are not actually needed in the simulation, this section can also be left empty.

### Body, material, body force and initial condition sections

The Elmer mesh files contain information on how the computational region is divided into parts referred to as bodies. A body section associates each body with an equation set, material properties, body forces, and initial conditions by referring to definitions given in a specified equation section, material section, body force section, and initial condition section. To manage to do this, the different sections of the same type are distinguished by integer identifiers that are parts of the section names. Note that the integer in the body section name is an identifier for the body itself.

For example, one may define

```
Body 1
  Material = 1
  Body Force = 1
  Equation = 1
  Initial Condition = 2
End
```

Material properties, body forces, an equation set, and initial conditions are then defined in the material section

```
Material 1
  ...
End
```

the body force section

```
Body Force 1
  ...
End
```

the equation section

```
Equation 1
  ...
End
```

and the initial condition section

```
Initial Condition 2
  ...
End
```

What material properties and body forces need to be specified depends on the mathematical models involved in the simulation, and the initial condition section used for giving initial values is only relevant in the solution of evolutionary problems. We here omit the discussion of these very model-dependent issues; after reading this introductory chapter the reader should be able to understand the related documentation given in Elmer Models Manual, which focuses on describing the different mathematical models, while the contents of equation section will be described next.

### Equation and solver sections

Equation section provides us a way to associate each body with a set of solvers, where each solver is typically associated with the ability to solve a certain physical model; cf. the definition of solver given in the beginning of Section 1.3.1. That is, if the set defined consists of more than one solver, several physical phenomena may be considered to occur simultaneously over the same region of space. The actual definitions of the solvers are given in solver sections, the contents of an equation section being basically a list of integer identifiers for finding the solver sections that define the solvers. The keyword commands given in the solver sections then control the selection of physical models, linearization procedures of nonlinear models, the selection of solution methods for resulting linear equations, convergence tolerances, etc.

For example, if only two solvers are needed, one may simply define a list of two solver identifiers

```
Equation 1
  Active Solvers(2) = 1 2
End
```

Then the solver definitions are read from the solver sections

```
Solver 1
...
End
```

and

```
Solver 2
...
End
```

Finally, we give an example of solver definitions, without trying to explain the commands at this point:

```
Solver 1
  Equation = "Poisson"
  Variable = "Potential"
  Variable DOFs = 1
  Procedure = "Poisson" "PoissonSolver"
  Linear System Solver = "Direct"
  Steady State Convergence Tolerance = 1e-06
End
```

### Boundary condition section

Boundary condition sections define the boundary conditions for the different models. The Elmer mesh files contain information on how the boundaries of the bodies are divided into parts distinguished by their own boundary numbers. The keyword `Target Boundaries` is used to list the boundary numbers that form the domain for imposing the boundary condition. For example the declaration

```
Boundary Condition 1
  Target Boundaries(2) = 1 2
...
End
```

means that the boundary condition definitions that follow concern the two parts having the boundary numbers 1 and 2.

### Text outside sections

We finally note that some commands, such as comments started with the symbol `!` and MATC expressions described below, may also be placed outside section definitions. An exception of this type is also the command

```
Check Keywords "Warn"
```

usually placed in the beginning of the input file. When this command is given, the solver outputs warning messages if the input file contains keywords that are not listed in the file of known keywords. If new keywords are introduced, misleading warning messages can be avoided by adding the new keywords to the keyword file `SOLVER.KEYWORDS`, located in the directory of the shared library files of ElmerSolver. The other options include `ignore`, `abort`, `silent`.

There is also the commands `echo on` and `echo off` that may be used to control the output of the parser. This is mainly intended for debugging purposes. The default is `off`.

## 2.3 Keyword syntax

As already illustrated, a basic keyword command used in the solver input file is a statement which sets the value of a solution parameter with the equal sign. Such a command in its full form also contains the data type declaration; for example

```
Density = Real 1000.0
```

Valid data types generally are

- Real
- Integer
- Logical
- String
- File

If the keyword is listed in the keyword file `SOLVER.KEYWORDS`, the data type declaration may be omitted. Therefore, in the case of our example, we may also define

```
Density = 1000.0
```

The value of a keyword may also be an array of elements of specified data type, with the array size definition associated with the keyword. We recall our previous examples of the equation and boundary condition sections, where we defined two lists of integers using the commands

```
Active Solvers(2) = 1 2
```

and

```
Target Boundaries(2) = 1 2
```

Two-dimensional arrays are also possible and may be defined as

```
My Parameter Array(3,3) = Real 1 2 3 \
                                4 5 6 \
                                7 8 9
```

### Defining parameters depending on field variables

Most solver parameters may depend on time, or on the field variables defined in the current simulation run. Such dependencies can generally be created by means of tabular data, MATC functions, or Fortran functions. MATC has the benefit of being an interpreted language, making an additional compilation step with a compiler unnecessary.

Simple interpolating functions can be created by means of tabular data. The following example defines the parameter `Density` the value of which depends on the variable `Temperature`:

```
Density = Variable Temperature
Real
  0      900
 273 1000
 300 1020
 400 1000
End
```

This means that the value of `Density` is 900 when `Temperature` is 0, and the following lines are interpreted similarly. Elmer then uses linear interpolation to approximate the parameter for argument values not given in the table. If the value of the independent variable is outside the data set, the first or the last interpolating function which can be created from the tabulated values is used to extrapolate the value of the parameter.

If the field variable has several independent components, such as the components of displacement vector, the independent components may be used as arguments in a function definition. For example, if a three-component field variable is defined in a solver section using the commands

```
Variable = "Displ"
Variable DOFs = 3
```

then the solver of Elmer knows, in addition to the three-component vector `Displ`, three scalar fields `Displ 1`, `Displ 2` and `Displ 3`. These scalar fields may be used as independent variables in parameter definitions and used in the definitions of initial and boundary conditions, etc.

More complicated functions can be defined using MATC language. Here the basic usage of MATC in connection with the solver input file is illustrated; for an additional documentation, see a separate manual for MATC. For example, one may define

```
Density = Variable Temperature
MATC "1000*(1-1.0e-4*(tx-273))"
```

This means that the parameter `Density` depends on the value of `Temperature` as

$$\rho = \rho_0(1 - \beta(T - T_0)), \quad (2.1)$$

with  $\rho_0 = 1000$ ,  $\beta = 10^{-4}$  and  $T_0 = 273$ . Note that the value of the independent variable is known as `tx` in the MATC expression.

If the independent variable has more than one component, the variable `tx` will contain all the components in values `tx(0)`, `tx(1)`, ..., `tx(n-1)`, where  $n$  is the number of the components of the independent variable. A MATC expression may also take several scalar arguments; one may define, for example,

```
My Parameter = Variable Time, Displ 1
Real MATC "..."
```

The values of the scalar fields `Time` and `Displ 1` can then be referred in the associated MATC expression by the names `tx(0)` and `tx(1)`, respectively.

In addition to using MATC functions, Fortran 90 functions may also be used to create parameter definitions, etc. In the same manner as MATC functions are used, we may define

```
Density = Variable Temperature
Procedure "filename" "proc"
```

In this case the file "filename" should contain a shareable .so (Unix) or .dll (Windows) code for the user function whose name is "proc". The call interface for the Fortran function is as follows

```
FUNCTION proc( Model, n, T ) RESULT(dens)
  USE DefUtils)
  IMPLICIT None
  TYPE(Model_t) :: Model
  INTEGER :: n
  REAL(KIND=dp) :: T, dens

  dens = 1000*(1-1.0d-4*(T-273.0d0))
END FUNCTION proc
```

The `Model` structure contains pointers to all information about the model, and may be used to obtain field variable values, node coordinates, etc. The argument  $n$  is the index of the node to be processed, and  $T$  is the value of the independent variable at the node. The function should finally return the value of the dependent variable.

The independent variable can also be composed of several independent components. We may thus define

```
Density = Variable Coordinate
  Procedure "filename" "proc"
```

Now the argument T in the Fortran function interface should be a real array of three values, which give the x,y and z coordinates of the current node.

### Parameterized keyword commands

The solver input file also offers possibilities for creating parameterized commands that utilize MATC. In the solver input file an expression following the symbol \$ is generally interpreted to be in MATC language. If the solver input file contains the lines

```
$solvertype = "Iterative"
$tol = 1.0e-6
```

then one may define, e.g.,

```
Solver 1
...
Linear System Solver = $solvertype
Linear System Convergence Tolerance = $tol
...
End

Solver 2
...
Linear System Solver = $solvertype
Linear System Convergence Tolerance = $100*$tol
...
End
```

### Alternative keyword syntax

Some keyword commands may be given by using an alternative syntax that may sometimes be needed. The size of an integer or real number arrays may be given in parenthesis in connection with the keyword, but also with the Size declaration. Therefore the following are exactly the same

```
Timestep Intervals(3) = 1 10 100
Timestep Intervals = Size 3; 1 10 100
```

This feature is useful when giving vectors and matrices in ElmerGUI since there the keyword body is fixed and cannot include any size declaration. Note that in the above the semicolon is used as an alternative character for newline.

Another convention is to use two colons to make in-lined definitions in the sif files. The following two expressions are equal

```
Body Force 1
  Heat Source = 1.0
End
```

and

```
Body Force 1 :: Heat Source = 1.0
```



## 2.4 Running several sequences

### Execution within command file

When reading the string `RUN` in the command file, the solver stops the reading and performs the computation with the instructions so far obtained. After a successful execution the solver continues to interpret the command file. Using this functionality it is therefore possible to create scripts where some parameter value is changed and the problem is recomputed. For example, adding the same sequence to the end of the `sif` file could be used to test the solution with another linear solver

```
RUN
Solver 1::Linear System Iterative Method = BiCgstabl
RUN
```

It should be noted that not quite all features support this procedure. For example, some preconditioners create static structures that will not be recreated.

## Chapter 3

# Restart from existing solutions

Often, the user wants to restart a run. This may be needed simply to continue an interrupted simulation — no matter what caused the interruption — but also to read in values needed either as initial conditions or as boundary conditions. These features are controlled by some keywords in the `Simulation` section that will be presented in the following sections.

### 3.1 Restart file

Any output file obtained by using the keyword command

```
Output File = String ...
```

can be used to define a restart point for a new simulation. By convention the suffix of the file has been `.result` but basically it may be chosen by the user.

By default all distributed fields will be saved to the restart file. Additionally the user may save global variables with the following keyword

```
Output Global Variables = Logical
```

If one wants to select the fields to be saved they may be given individually by

```
Output Variable i = String
```

where  $i = 1, 2, 3, \dots$

The format of the output is either `ascii` or `binary`. `Ascii` is the default, and `binary` format is enforced by setting

```
Binary Output = True
```

The limitation of the restart functionality is that the mesh on which the previous case has been run must be identical to that on which the new run is performed. In parallel runs, additionally, also the partitions of the mesh have to coincide. The permutation vectors may vary, and also the field variables do not have to be the same.

The commands for restarting are then given in the `Simulation` section by declaring the restart file name as well as a restart position. For example we may specify

```
Simulation
  Restart File = "previousrun.result"
  Restart Position = 101
End
```

This would perform the current simulation by restarting from the time/iteration level 101 of the previously stored result file `previousrun.result`.

If one wants to select the fields to be restarted they may be given individually by

```
Restart Variable i = String
```

where  $i = 1, 2, 3, \dots$

Upon running the new simulation, a message similar to the following example should be seen in the standard output of Elmer:

```
LoadRestartFile:
LoadRestartFile: -----
LoadRestartFile: Reading data from file: previousrun.result
LoadRestartFile: BINARY 3.L
LoadRestartFile:
LoadRestartFile: Total number of dofs to load: 13
LoadRestartFile: Reading time sequence:      2.000E-03
LoadRestartFile: Reading timestep: 10
LoadRestartFile: Time spent for restart (s):      7.9990E-03
LoadRestartFile: All done
LoadRestartFile: -----
```

If the number of stored time/iteration levels is not known a priori, the user can insert the command

```
Restart Position = 0
```

in order to make sure that the results for the lastly stored time/iteration level are reloaded.

Result files arising from steady state simulations often contain results for multiple iteration steps (with the result for the last step containing the converged solution). Nevertheless, these instances of solutions are — if reloaded — interpreted to describe the solution at different time levels. In this case the user might want to redefine the value of time variable for the restarted simulation, especially if continuing with transient runs. The keyword command

```
Restart Time = Real ...
```

may be given in order to manually set the time to correspond the zeroth time level of the new simulation.

## 3.2 Initialization of dependent variables

The initialization of variables and their boundary conditions is done by default before reading in the previous results. That has two main implications:

1. Values set in the section `Initial Condition` are overwritten by the corresponding values of the variable loaded afterwards from the restart file
2. Variable values given as initial or boundary conditions and specified to depend on other variables are not initiated with those values from the restart file by default.

The latter can be influenced with two keywords, `Restart Before Initial Conditions` (by default `False`) and `Initialize Dirichlet Condition` (by default `True`).

By setting

```
Restart Before Initial Conditions = Logical True
```

Elmer would first load the variables from the restart file and then apply initial conditions to those variables that have not been set by the earlier solution. This is necessary if one of the initial conditions depends on the earlier solution. By default, first the initial conditions from the solver input file are set and thereafter the restart file (if existing) is read.

The value of the keyword `Initialize Dirichlet Condition` is by default set to be true, which means that Dirichlet conditions are set before the simulation and thus also before the particular solver for handling that variable is executed. If a boundary condition for a certain variable now depends on the value of another, the first-time Dirichlet condition is set using the initial values of variables — either set or read in from the restart file. If this is not wanted, the user can switch to using the option

```
Initialize Dirichlet Condition = False
```

which will set the Dirichlet condition on the fly during the execution of the solver associated with the variable.

# Chapter 4

## Solution methods for linear systems

### 4.1 Introduction

Discretization and linearization of a system of partial differential equations generally leads to solving linear systems

$$Ax = b, \quad (4.1)$$

where  $A$  and  $b$  are of orders  $n \times n$  and  $n \times 1$ , respectively. The coefficient matrix  $A$  resulting from the finite element discretization has a specific feature that the matrix is sparse, i.e. only a few of the matrix entries in each row differ from zero. In many applications the system can also have a very large order  $n$ , so that the chief part of the computation time in performing the simulation is typically spent by solvers for the linear systems.

Solution methods for linear systems fall into two large categories: direct methods and iterative methods. Direct methods determine the solution of the linear system exactly up to a machine precision. They perform in a robust manner leading to the solution after a predetermined number of floating-point operations. Nevertheless, the drawback of direct methods is that they are expensive in computation time and computer memory requirements and therefore cannot be applied to linear systems of very large order. The efficient solution of large systems generally requires the use of iterative methods which work by generating sequences of (hopefully) improving approximate solutions.

ElmerSolver provides access to both direct and iterative methods. The iterative methods available fall into two main categories: preconditioned Krylov subspace methods and multilevel methods. Iteration methods that combine the ideas of these two approaches may also be constructed. Such methods may be very efficient leading to a solution after a nearly optimal number of operation counts.

The development of efficient solution methods for linear systems is still an active area of research, the amount of literature on the topic being nowadays vast. The aim of the following discussion is to provide the user the basic knowledge of the solution methods available in ElmerSolver. The detailed description of methods is omitted. For a more comprehensive treatment the reader is referred to references mentioned.

### 4.2 Direct methods

A linear system may be solved in a robust way by using direct methods. ElmerSolver offers two main options for using direct methods. The default method utilizes the well-known LAPACK collection of subroutines for band matrices. In practice, this solution method can only be used for the solution of small linear systems as the operation count for this method is of order  $n^3$ .

The other direct solver employs the Umfpack routines to solve sparse linear systems [1]. Umfpack uses the Unsymmetric MultiFrontal method. In practice it may be the most efficient method for solving 2D problems as long as there is enough memory available.

It should be noted that the success of the direct solvers depends very much on the bandwidth of the sparse matrix. In 3D these routines therefore usually fail miserably.

Elmer may be also compiled with Mumps, SuperLU, and Pardiso. The licensing scheme of these software do not allow the distribution of precompiled binaries but everybody may themselves compile a version that includes these solvers. Many times the best linear solver for a particular problem may be found among these.

### 4.3 Preconditioned Krylov methods

ElmerSolver contains a set of Krylov subspace methods for the iterative solution of linear systems. These methods may be applied to large linear systems but rapid convergence generally requires the use of preconditioning.

#### 4.3.1 Krylov subspace methods

The Krylov subspace methods available in ElmerSolver are

- Conjugate Gradient (CG)
- Conjugate Gradient Squared (CGS)
- Biconjugate Gradient Stabilized (BiCGStab)
- BiCGStab( $\ell$ )
- Transpose-Free Quasi-Minimal Residual (TFQMR)
- Generalized Minimal Residual (GMRES)
- Generalized Conjugate Residual (GCR)

Both real and complex systems can be solved using these algorithms. For the detailed description of some of these methods see [3] and [4].

A definite answer to the question of what is the best iteration method for a particular case cannot be given. In the following only some remarks on the applicability of the methods are made.

The CG method is an ideal solution algorithm for cases where the coefficient matrix  $A$  is symmetric and positive definite. The other methods may also be applied to cases where  $A$  is non-symmetric. It is noted that the convergence of the CGS method may be irregular. The BiCGStab and TFQMR methods are expected to give smoother convergence. In cases where BiCGStab does not work well it may be advantageous to use the BiCGStab( $\ell$ ) method, with  $\ell \geq 2$  a parameter. Faster convergence in terms of iteration counts may be expected for increasing values of the parameter  $\ell$ . However, since more work is required to obtain the iterate as  $\ell$  increases, optimal performance in terms of computational work may be realized for quite a small value of  $\ell$ . Starting with the value  $\ell = 2$  is recommended.

The GMRES and GCR methods generate gradually improving iterates that satisfy an optimality condition. The optimality may however come with a significant cost since the computational work and computer memory requirements of these methods increase as the number of iterations grows. In practice these methods may be restarted after  $m$  solution updates have been performed in order to avoid the increasing work and storage requirements. The resulting methods are referred to as the GMRES( $m$ ) and GCR( $m$ ) methods. Here the choice of  $m$  has to be controlled by the user. It should be noted that the convergence of the restarted algorithms may be considerably slower than that of full versions. Unfortunately, general guidelines for determining a reasonable value for  $m$  cannot be given as this value is case-dependent.

#### 4.3.2 Basic preconditioning strategies

The performance of iterative Krylov methods depends greatly on the spectrum of the coefficient matrix  $A$ . The rate at which an iteration method converges can often be improved by transforming the original system into an equivalent one that has more favorable spectral properties. This transformation is called preconditioning and a matrix which determines the transformation is called a preconditioner.

In ElmerSolver preconditioning is usually done by transforming (4.1) into the system

$$AM^{-1}z = b, \quad (4.2)$$

where the preconditioner  $M$  is an approximation to  $A$  and  $z$  is related to the solution  $x$  by  $z = Mx$ . In practice, the explicit construction of the inverse  $M^{-1}$  is not needed, since only a subroutine that for a given  $v$  returns a solution  $u$  to the system

$$Mu = v \quad (4.3)$$

is required.

The solver of Elmer provides several ways to obtain preconditioners. The basic strategies described in this section may be used to form the Jacobi preconditioner and incomplete factorization preconditioners. In addition to these preconditioners which remain stationary during the linear system iteration, the solver of Elmer allows the use of variable preconditioning where the action of the preconditioner is defined in terms of applying another iteration method to auxiliary preconditioning systems. Such inner-outer iterations are typically applied in connection with block preconditioners and preconditioning by multilevel methods. These advanced preconditioning strategies are considered in Section 4.5 below.

The Jacobi preconditioner is simply based on taking  $M$  to be the diagonal of  $A$ . More sophisticated preconditioners may be created by computing incomplete LU factorizations of  $A$ . The resulting preconditioners are referred to as the ILU preconditioners. This approach gives the preconditioner matrix  $M$  in the form  $M = LU$  where  $L$  and  $U$  are lower and upper triangular with certain elements that arise in the factorization process ignored.

There are several ways to choose a set of matrix positions that are allowed to be filled with nonzero elements. ILU preconditioners of fill level  $N$  referred to as the ILU( $N$ ) preconditioners are built so that ILU(0) accepts nonzero elements in the positions in which  $A$  has nonzero elements. ILU(1) allows nonzero elements in the positions that are filled if the first step of Gaussian elimination is performed for  $A$ . ILU(2) accepts fill in positions that are needed if the next step of Gaussian elimination is performed with ILU(1) factorization, etc.

Another approximate factorization strategy is based on numerical tolerances. The resulting preconditioner is referred to as the ILUT preconditioner. In the creation of this preconditioner Gaussian elimination is performed so that elements of a given row of the LU factorization are obtained but only elements whose absolute value (scaled by the norm of all values of the row) is over a given threshold value are accepted in the preconditioner matrix.

Obviously, the additional computation time that is spent in creating the preconditioner matrix and solving systems of the type (4.3) should be compensated by faster convergence. Finding an optimal ILU preconditioner for a particular case may require the use of trial and error. Start with ILU(0) and try to increase the fill level  $N$ . As  $N$  increases, more and more elements in the incomplete LU factorization of the coefficient matrix are computed, so the preconditioner should in principle be better and the number of iterations needed to obtain a solution should decrease. At the same time the memory usage grows rapidly and so does the time spent in building the preconditioner matrix and in applying the preconditioner during iterations. The same applies to the ILUT preconditioner with decreasing threshold values.

## 4.4 Multilevel methods

A class of iterative methods referred to as multilevel methods provides an efficient way to solve large linear systems. For certain class of problems they perform nearly optimally, the operation count needed to obtain a solution being nearly of order  $n$ . Two different multilevel-method approaches are available in ElmerSolver, namely the geometric multigrid (GMG) and algebraic multigrid (AMG).

### 4.4.1 Geometric multigrid

Given a mesh  $\mathcal{T}_1$  for the finite element discretization of problem the geometric multigrid method utilizes a set of coarser meshes  $\mathcal{T}_k$ ,  $k = 2, \dots, N$ , to solve the linear system arising from the discretization. One of the fundamental ideas underlying the method is based on the idea of coarse grid correction. That is, a

coarser grid is utilized to obtain an approximation to the error in the current approximate solution of the linear system. The recursive application of this strategy leads us to multigrid methods.

To utilize different meshes multigrid methods require the development of methods for transferring vectors between fine and coarse meshes. Projection operators are used to transfer vectors from a fine mesh  $\mathcal{T}_k$  to a coarse mesh  $\mathcal{T}_{k+1}$  and will be denoted by  $I_k^{k+1}$ , while interpolation operators  $I_{k+1}^k$  transfer vectors from a coarse mesh to a fine mesh.

The multigrid method is defined by the following recursive algorithm: Given  $A$ ,  $b$  and an initial guess  $y$  for the solution of the system  $Ax = b$  set  $i = 1$  and do the following steps:

1. If  $i = N$ , then solve the system  $Ax = b$  by using the direct method and return.
2. Do pre-smoothing by applying some iterative algorithm for a given number of times to obtain a new approximate solution  $y$ .
3. Perform coarse grid correction by starting a new application of this algorithm with  $A = I_i^{i+1} A I_{i+1}^i$ ,  $b = I_i^{i+1}(Ay - b)$ ,  $i = i + 1$  and the initial guess  $e = 0$ .
4. Compute a new approximate solution by setting  $y = y + I_{i+1}^i e$
5. Do post-smoothing by applying some iterative algorithm for a given number of times to obtain a new approximate solution  $y$ .
6. If the solution has not yet converged, go to step 2.

In ElmerSolver one may choose the Jacobi, CG or BiCGStab algorithm as the method for smoothing iterations.

The full success of multigrid methods is based on the favorable combination of the properties of basic iteration methods and methods for transferring vectors between meshes. The smoothing iterations give rapid convergence for oscillatory solution components while coarse grid correction entails an efficient solution method for smooth solution components. For a comprehensive introduction to the geometric multigrid method the reader is referred to [2].

#### 4.4.2 Algebraic multigrid

In many cases the geometric multigrid may not be applied because we do not have the luxury of having a set of appropriate hierarchical meshes. The alternative is the algebraic multigrid (AMG) method which uses only the matrix  $A$  to construct the projectors and the coarse level equations. AMG is best suited for symmetric and positive semidefinite problems. For other types of problems the standard algorithm may fail. For more information on AMG see reference [5].

The AMG method has two main phases. The set-up phase includes the recursive selection of the coarser levels and definition of the transfer and coarse-grid operators. The solution phase uses the resulting components to perform a normal multigrid cycling until a desired accuracy is reached. The solution phase is similar to that of the GMG.

Note that the AMG solvers in ElmerSolver are not fully mature. They may provide good solutions for some problems while desperately failing for others.

##### Classical Ruge-Stüben algorithm

The coarsening is performed using a standard Ruge-Stüben coarsening algorithm. The possible connections are defined by the entries in the matrix  $A$ . The variable  $i$  is strongly coupled to another variable  $j$  if

$$a_{ij} < -c_- \max |a_{ik}| \quad \text{or} \quad a_{ij} > c_+ \max |a_{ik}|, \quad (4.4)$$

where  $0 < c_- < 1$  and  $0 < c_+ < 1$  are parameters. Typically  $c_- \approx 0.2$  and  $c_+ \approx 0.5$ . Once the negative ( $P^-$ ) and positive ( $P^+$ ) strong couplings have been determined the variables are divided into coarse ( $C$ ) and fine ( $F$ ) variables using the standard coarsening scheme.



The interpolation matrix may be constructed using the  $C/F$ -splitting and the strong couplings of the matrix. The interpolation of coarse nodes is simple as they remain unchanged. The interpolation of fine nodes starts from the fact the smooth error  $e$  must roughly satisfy the condition  $Ae = 0$  or

$$a_{ii}e_i + \sum_{j \neq i} a_{ij}e_j = 0. \quad (4.5)$$

By manipulation

$$a_{ii}e_i + \alpha_i \sum_{j \in C \cap P_i^-} a_{ij}e_j + \beta_i \sum_{j \in C \cap P_i^+} a_{ij}e_j = 0, \quad (4.6)$$

where

$$\alpha_i = \frac{\sum_{j \in P_i^-} a_{ij}}{\sum_{j \in C \cap P_i^-} a_{ij}} \quad \text{and} \quad \beta_i = \frac{\sum_{j \in P_i^+} a_{ij}}{\sum_{j \in C \cap P_i^+} a_{ij}}. \quad (4.7)$$

The interpolation thus becomes

$$e_i = \sum_{j \in C \cap P_i} w_{ij}e_j \quad \text{with} \quad w_{ij} = \begin{cases} -\alpha_i a_{ij}/a_{ii}, & j \in P_i^-, \\ -\beta_i a_{ij}/a_{ii}, & j \in P_i^+. \end{cases} \quad (4.8)$$

This is known as *direct interpolation*. It may be modified by using also the strong  $F$ -nodes in the interpolation. This means that in formula (4.5) the following elimination is made for each  $j \in F \cap P_i$

$$e_j \rightarrow - \sum_{k \in C \cap P_j} a_{jk}e_k/a_{jj}. \quad (4.9)$$

This is known as *standard interpolation*. In practice it means that the number of nodes used in the interpolation is increased. This may be important to the quality of the interpolation particularly if the number of direct  $C$ -neighbors is small.

After the interpolation weights have been computed the smallest coefficients may be truncated if they are small, *i.e.*,  $w_j < c_w \max |w_k|$ , where  $c_w \approx 0.2$ . The other values must accordingly be increased so that the sum of weights remains constant. The truncation is essential in preventing the filling of the coarse level matrices.

### Cluster multigrid

There is also an implementation of the agglomeration or cluster multigrid method. It is a variant of the algebraic multigrid method. In this method the components are grouped and the coarse-level matrices are created simply by summing up the corresponding rows and columns. In other words, the projection matrix includes just ones and zeros.

The cluster multigrid method should be more robust for problems where it is difficult to generate an optimal projection matrix. However, for simple problems it is usually beaten by the standard Ruge-Stüben method.

## 4.5 Preconditioning via inner iterations

In the following, we return to the subject of preconditioning and consider the construction of more advanced preconditioners that utilize the idea of variable preconditioning. We recall that the procedural description of preconditioning allows us to consider schemes where the action of  $M^{-1}$  in (4.2) is replaced by performing an inexact solution of the preconditioning system of the type (4.3) with other iterative methods. In this connection, the iteration steps of the method applied to the preconditioning system are referred to as inner iterations, while the iteration steps of the method which is being preconditioned are referred to as outer iterations. In addition, the concept of variable preconditioning is motivated by the fact that the preconditioner can change during the outer iteration process. It should be noted that all the Krylov methods do not necessarily admit using variable preconditioning. Anyhow, GCR algorithm can always be employed as the outer iterative method, and we generally recommend using it in connection with inner-outer iterations.

### 4.5.1 Preconditioning by multilevel methods

Multilevel methods are iteration methods on their own but they can also be applied to define preconditioners for the Krylov subspace methods. This preconditioning approach corresponds to taking  $M = A$  in (4.3) and performing an inaccurate solution of the resulting system using multilevel methods to obtain  $u$ . A rather mild stopping criterion may be used in this connection. Preconditioning by multilevel methods may lead to very efficient solution methods for large linear systems.

### 4.5.2 Block preconditioning

Performing preconditioning by solving auxiliary systems iteratively also arises naturally in connection with a strategy referred to as the block preconditioning. Tacit in the concept of block preconditioning is that the unknowns of the linear system are grouped into sets of variables so that a natural block partitioning of the linear system is induced. Often such partitioning is naturally induced by physics. Block factorizations, block matrix splittings, or even other iteration schemes based on updating different types of variables independently can then be utilized to derive preconditioners. The bottom line is that such block preconditioners typically lead to solving subsidiary problems which can be handled by employing inner iterations.

The designs of efficient block preconditioners tend to involve problem-specific features, especially, if block factorizations or other segregated iteration methods are used to derive preconditioners. Therefore the model solvers in Elmer that offer the possibility of using block preconditioning have originally been developed independently, with the block preconditioning ability being a part of the solver-level implementation. Recently, routines which are suited for constructing block preconditioners on a more general level have also been implemented.

## 4.6 Keywords related to linear system solvers

The following keywords may be given in Solver section of the solver input file (.sif file).

Linear System Solver `String`

Using this keyword the type of linear system solver is selected. This keyword may take the following values:

- Direct
- Iterative
- Multigrid

Here Iterative and Multigrid refer to the Krylov and multilevel methods, respectively.

Linear System Direct Method `String`

If the value of the Linear System Solver keyword is set to be Direct, one may choose a band matrix solver with the value Banded or a sparse matrix solver with the value umfpack, mumps, Pardiso or superlu. The default is Banded.

Linear System Iterative Method `String`

If the value of the Linear System Solver keyword is set to be Iterative, one should choose a Krylov method by setting the value of this keyword to be one of the following alternatives:

- CG
- CGS
- BiCGStab
- BiCGStabl
- TFQMR
- GMRES
- GCR

See also the MG Smoother keyword.

Linear System GMRES Restart Integer [10]

The restart parameter  $m$  for the GMRES( $m$ ) method may be given using this keyword.

Linear System GCR Restart Integer

The restart parameter  $m$  for the GCR( $m$ ) method may be given using this keyword. The default option is that restarting is not performed, i.e. the full GCR is used.

BiCGstabl polynomial degree Integer

The parameter  $\ell$  for the BiCGStab( $\ell$ ) method may be given. By default the minimal applicable value  $\ell = 2$  is used.

Linear System Preconditioning String

A preconditioner for the Krylov methods may be declared by setting the value of this keyword to be one of the following alternatives:

- None
- Diagonal
- ILUn, where the literal n may take values 0,1,...,9.
- ILUT
- Multigrid

See also the MG Preconditioning keyword.

Linear System ILUT Tolerance Real [0.0]

This keyword is used to define the value of the numerical tolerance for the ILUT preconditioner.

Linear System Convergence Tolerance Real [0.0]

This keyword is used to define a stopping criterion for the Krylov methods. The approximate solution is considered to be accurate enough if the iterate satisfies

$$\frac{\|Ax - b\|}{\|b\|} \leq \epsilon$$

where  $\epsilon$  is the value of this keyword. See also MG Tolerance.

Linear System Max Iterations Integer [0]

This keyword is used to define the maximum number of the iterations the Krylov methods are permitted to perform. If this limit is reached and the approximate solution does not satisfy the stopping criterion, ElmerSolver either continues the run using the current approximate solution as the solution of the system or aborts the run depending on the value of Linear System Abort Not Converged keyword. See also MG Max Iterations keyword.

Linear System Abort Not Converged Logical [True]

If the value of this keyword is set to be True, ElmerSolver aborts the run when the maximum number of iterations the algorithm is permitted to perform is reached and the approximate solution does not satisfy the stopping criterion. Otherwise the run will be continued using the current approximate solution as the solution of the system (this may lead to troubles at later steps of computation).

Linear System Residual Output Integer [1]

By default the iterative algorithms display the value of the (scaled) residual norm after each iteration step. Giving a value  $n > 1$  for this keyword may be used to display the residual norm only after every  $n$  iterations. If the value 0 is given, the residual output is disabled.

**Linear System Precondition Recompute Integer [1]**

By default the ElmerSolver computes the preconditioner when a new application of iterative algorithm is started. If the value of this keyword is set to be `n`, the preconditioner is computed only after `n` successive subroutine calls for linear systems arising from same source. This may speed up the solution procedure especially in cases where the coefficient matrix does not change much between successive subroutine calls. On the other hand if the coefficient matrix has changed significantly, the preconditioner may not be efficient anymore.

**Optimize Bandwidth Logical [True]**

If the value of this keyword is set to be `True`, the Cuthill-McKee bandwidth optimization scheme is used to order the unknowns in such a way that band matrices can be handled efficiently. The bandwidth optimization is recommended when the direct solver or incomplete factorization preconditioners are used.

The keywords beginning with `MG` are activated only if either the `Linear System Solver` or `Linear System Preconditioning` keyword has the value `Multigrid`. If a multigrid method is used as the linear system solver, some keywords starting with `MG` may be replaced by corresponding keywords starting with phrase `Linear System`. It should be noted that in the case of a multigrid solver there are some limitations to what values the keywords starting with the phrase `Linear System` may take, see below.

**MG Levels Integer [1]**

This keyword is used to define the number of levels for the multigrid method.

**MG Equal Split Logical [False]**

A hierarchy of meshes utilized by the multigrid method may be generated automatically by setting the value of this keyword to be `True`. The coarsest mesh must be supplied by the user and is declared in the usual way in the Header section of the solver input file. The other meshes are obtained using an equal division of the coarse mesh. The solution of the problem will be sought for the finest mesh.

**MG Mesh Name File**

A hierarchy of meshes utilized by the multigrid method may be supplied by the user. A base name of the mesh directories is declared using this keyword. The names of mesh directories must be composed of the base name appended with a level number such that if the base name is `mgridmesh`, the mesh directories should have names `mgridmesh1`, `mgridmesh2`, etc. The meshes are numbered starting from the coarsest mesh. In addition, the finest mesh must be declared in the Header section of the solver input file. It should be noted that the `MG Equal Split` keyword must be set to be `False` to enable the use of user-supplied meshes.

**MG Max Iterations Integer [0]**

If a multigrid method is used as a preconditioner for the Krylov methods, the value of this keyword defines the maximum number of iterations the multigrid method is allowed to perform to solve the preconditioning equation (4.3). Usually one or two iterations are sufficient. If a multigrid method is the linear system solver, the use of this keyword is similar to that of the `Linear System Max Iterations` keyword.

**MG Convergence Tolerance Real [0.0]**

If a multigrid method is used as a preconditioner for the Krylov methods, this keyword defines the solution accuracy for the preconditioning equation (4.3). This keyword is not usually needed if the `MG Max Iterations` keyword has a small value. If a multigrid method is the linear system solver, the use of this keyword is similar to that of the `Linear System Convergence Tolerance` keyword.

**MG Smoother String**

This keyword defines the algorithm for pre- and post-smoothing. It may take one of the following values:

- `Jacobi`

- CG
- BiCGStab

If the linear system solver is a multigrid method, the Linear System Iterative Method keyword may be used instead of this keyword, but only the three algorithms mentioned here can be applied.

MG Pre Smoothing Iterations `Integer [0]`

This keyword defines the number of pre-smoothing iterations.

MG Post Smoothing Iterations `Integer [0]`

This keyword defines the number of post-smoothing iterations.

MG Preconditioning `String`

This keyword declares the preconditioner for the algorithm which is used in smoothing iterations. It may take one of the following values:

- None
- ILUn, where the literal n may take values 0,1,...,9.
- ILUT

Note that this keyword is not related to using multigrid method as a preconditioner. It is also noted that preconditioning the smoothing algorithms does not seem to work well if a multigrid method is used as a preconditioner for Krylov methods.

MG ILUT Tolearance `Real [0.0]`

This keyword defines the numerical tolerance for the ILUT preconditioner in connection with smoothing iterations.

The keywords for the algebraic multigrid solver are in a large part the same as for the geometric multigrid. There are however some keywords that are related only to AMG.

MG Lowest Linear Solver Limit `Integer`

This value gives a lower limit for the set of coarse nodes after which the recursive multilevel routine is terminated. A proper value might be around 100.

MG Recompute Projector `Logical`

This flag may be used to enforce recomputation of the projector each time the algebraic multigrid solver is called. The default is `False` as usually the same projector is appropriate for all computations.

MG Eliminate Dirichlet `Logical`

At the highest level the fixed nodes may all be set to be coarse since their value is not affected by the lower levels. The default is `True`

MG Eliminate Dirichlet Limit `Real`

Gives the maximum fraction of non-diagonal entries for a Dirichlet node.

MG Smoother `String`

In addition to the selection for the GMG option `sor` (symmetric over relaxation) is possible.

MG SOR Relax `String`

The relaxation factor for the SOR method. The default is 1.

MG Strong Connection Limit `Real`

The coefficient  $c_-$  in the coarsening scheme. Default is 0.25.

MG Positive Connection Limit `Real`

The coefficient  $c_+$  in the coarsening scheme. Default is 1.0.

MG Projection Limit `Real`

The coefficient  $c_w$  in the truncation of the small weights. The default is 0.1.

MG Direct Interpolate `Logical`

Chooses between direct and standard interpolation. The default is `False`.

MG Direct Interpolate Limit `Integer`

The standard interpolation may also be applied to nodes with only a small number of coarse connection. This gives the smallest number of nodes for which direct interpolation is used.

Finally, there are also some keywords related only to the clustering multigrid.

MG Cluster Size `Integer`

The desired choice of the cluster. Possible choices are 2,3,4,5,... and zero which corresponds to the maximum cluster.

MG Cluster Alpha `Real`

In the clustering algorithm the coarse level matrix is not optimal for getting the correct convergence. Tuning this value between 1 and 2 may give better performance.

MG Strong Connection Limit `Real`

This is used similarly as in the AMG method except it is related to positive and negative connections alike.

MG Strong Connection Minimum `Integer`

If the number of strong connections with the given limit is smaller than this number then increase the set of strong connection if available connections exist.

## 4.7 Implementation issues

### 4.7.1 The sparse matrix storage

To be efficient, iteration methods require that a matrix-vector product for sparse matrices is efficiently implemented. A special storage scheme called the Compressed Row Storage (CRS) [3] is used in ElmerSolver to store only those matrix coefficients that differ from zero.

The matrix structure is defined in module `Types` as:

```
TYPE Matrix_t
...
INTEGER :: NumberOfRows

REAL(KIND=dp), POINTER :: Values(:)
INTEGER, POINTER :: Rows(:), Cols(:), Diag(:)
...
END TYPE Matrix_t
```

The matrix type has several additional fields, but the basic storage scheme can be implemented using the fields shown. The array `Values` is used to store the nonzero elements of the coefficient matrix. The array `Cols` contains the column numbers for the elements stored in the array `Values`, while the array `Rows` contains indices to elements that start new rows. In addition, `Row(n+1)` gives the number of nonzero matrix elements + 1. The array `Diag` is used to store the indices of the diagonal elements.

For example, to go through the matrix row by row the following loop may be used

```
USE Types
TYPE(Matrix_t), POINTER :: A
REAL(KIND=dp):: val
INTEGER :: i, j, row, col
```

```

DO i=1, A % NumberOfRows
  PRINT *, 'Diagonal element for row ', i, ' is ', A % Values( A % Diag(i) )
  DO j=A % Rows(i), A % Rows(i+1)-1
    row = i
    col = A % Cols(j)
    val = A % Values(j)
    PRINT *, 'Matrix element at position: ', row,col, ' is ', val
  END DO
END DO

```

### 4.7.2 Subroutine calls

Most of the functionality of the sparse linear system solver of the ElmerSolver is available by using the function call

```
Norm = DefaultSolve().
```

The return value Norm is a norm of the solution vector.

Sometimes it may be convenient to modify the linear system before solving it. A Fortran function which performs this modification can be written by the user with the name of the function being declared in the solver input file. For example, this technique may be used to define a user-supplied linear system solver.

If the name of the user-supplied Fortran function is `proc` and it can be found in the file having the name `Filename`, the declaration

```
Before Linsolve File Filename proc
```

in the solver input file has the effect that the function will be called just before the default call of linear system solver. The arguments the function can take are fixed and are declared as

```

FUNCTION proc( Model, Solver, A, b, x, n, DOFs, Norm ) RESULT(stat)
  USE SolverUtils
  TYPE(Model_t)   :: Model
  TYPE(Solver_t)  :: Solver
  TYPE(Matrix_t), POINTER :: A
  REAL(KIND=dp)  :: b(:), x(:), Norm
  INTEGER :: n, DOFs, stat
  ...
END FUNCTION proc

```

Here the `Model` structure contains the whole definition of the elmer run. The `Solver` structure contains information for the equation solver from which this linear system originates. The coefficient matrix `A` is in CRS format, `b` is the right-hand side vector, and `x` contains the previous solution. The argument `n` is the number of unknowns, and `DOFs` is the number of unknowns at a single node.

If the return value from this function is zero, the (possibly) modified linear system is solved after the return. If the return value is 1, the linear system is assumed to be already solved and the vector `x` should contain the result. It is noted that the user-supplied Fortran function may also call the default linear equation solver within the function, i.e. one may write the subroutine call

```
CALL SolveLinearSystem( A, b, x, Norm, DOFs, Solver )
```

Here `A` and `b` may be modified so that the linear system which is solved need not be same as the input system.

In a similar way the user may also supply a user-defined Fortran function which will be called just after the solution of linear system. This is done using the declaration

```
After Linsolve File Filename proc
```

in the solver input file. The arguments of this function are the same as for a function in the context of `Before Linsolve` keyword.

## Bibliography

- [1] Umfpack home page. <http://www.cise.ufl.edu/research/sparse/umfpack/>.
- [2] W.L. Briggs. *A Multigrid Tutorial*. SIAM, 1987.
- [3] Richard Barrett et al. *Templates for the Solution of Linear Systems: Building Blocks for Iterative Methods*. SIAM, 1993.
- [4] R.W. Freund. A transpose-free quasi-minimal residual algorithm for non-hermitian linear systems. *SIAM J. Sci. Comput.*, 14:470–482, 1993.
- [5] K. Stüben. *Algebraic Multigrid (AMG): An introduction with applications*. GMD – Forschungszentrum Informationstechnik GmbH, 1999.



## Chapter 5

# Nonlinear System Options

### 5.1 Introduction

Numerical methods in linear algebra are usually intended for the solution of linear problems. However, there are many problems which are not linear in nature. The nonlinearity may be an intrinsic characteristic of the equation, such as is the case with inertial forces in the Navier-Stokes equation. The nonlinearity might also be a result of nonlinear material parameters that depend on the solution. Whatever the reason for nonlinearity the equations in Elmer are always first linearized to the form

$$A(u_{i-1})u_i = b(u_{i-1}), \quad (5.1)$$

where  $i$  refers to the iteration cycle.

How the equations are linearized varies from solver to another. For example, in the Navier-Stokes solver there are two different methods – the Picard linearization and the Newton linearization that may be used. Also a hybrid scheme where the Picard type of scheme is switched to the Newton kind of scheme when certain criteria are met is available. Therefore this section will not deal with the particular linearization technique of different solver but tries to give some light to the generic keywords that are available. Some keywords may also be defined in the Models Manual related to particular solvers.

In multiphysical simulations there are also a number of keywords related to the solution of coupled systems. Basically one may define how many times a system of equations is solved repeatedly at maximum and how what are the convergence criteria of the individual solvers that must be met simultaneously.

### 5.2 Keywords related to solution of nonlinear systems

These keywords are located in the Solver section of each solver, if required at all.

Nonlinear System Convergence Measure `String`

The change of solution between two consecutive iterations may be estimated by a number of different measures which are evoked by values `norm`, `solution` and `residual`. The default way of checking for convergence is to test the change of norm

$$\delta = 2 * ||u_i| - |u_{i-1}|| / (|u_i| + |u_{i-1}|). \quad (5.2)$$

This measure is rather liberal since the norm of two solutions may be the same even though the solutions would not. Therefore it is often desirable to look at the norm of change,

$$\delta = 2 * |u_i - u_{i-1}| / (|u_i| + |u_{i-1}|). \quad (5.3)$$

The third choice is to use a backward norm of the residual where the old solution is used with the new matrix.

$$\delta = |Ax_{i-1} - b| / |b|. \quad (5.4)$$

In the current implementation this norm lags one step behind and therefore always performs one extra iteration.

Nonlinear System Norm Degree `Integer`

The choice of norms used in the evaluation of the convergence measures is not self evident. The default is the  $L2$  norm. This keyword may be used to replace this by  $L_n$  norm where value  $n = 0$  corresponds to the infinity (i.e. maximum) norm.

Nonlinear System Norm Dofs `Integer`

For vector valued field variables by default all components are used in the computation of the norm. However, sometimes it may be desirable only to use some of them. This keyword may be used to give the number of components used in the evaluation. For example, in the Navier-Stokes equations the norm is only taken in respect to the velocity components while pressure is omitted.

Nonlinear System Convergence Absolute `Logical`

This keyword may be used to enforce absolute convergence measures rather than relative. The default is `False`.

Nonlinear System Convergence Tolerance `Real`

This keyword gives a criterion to terminate the nonlinear iteration after the relative change of the norm of the field variable between two consecutive iterations is small enough  $\delta < \epsilon$ , where  $\epsilon$  is the value given with this keyword.

Nonlinear System Max Iterations `Integer`

The maximum number of nonlinear iterations the solver is allowed to do.

Nonlinear System Newton After Iterations `Integer`

Change the nonlinear solver type to Newton iteration after a number of Picard iterations have been performed. If a given convergence tolerance between two iterations is met before the iteration count is met, it will switch the iteration type instead. This applies only to some few solvers (as the Navier-Stokes) where different linearization strategies are available.

Nonlinear System Newton After Tolerance `Real`

Change the nonlinear solver type to Newton iteration, if the relative change of the norm of the field variable meets a tolerance criterion:

$$\delta < \epsilon,$$

where  $\epsilon$  is the value given with this keyword.

Nonlinear System Relaxation Factor `Real`

Giving this keyword triggers the use of relaxation in the nonlinear equation solver. Using a factor below unity is sometimes required to achieve convergence of the nonlinear system. Typical values range between 0.3 and unity. If one must use smaller values for the relaxation factor some other methods to boost up the convergence might be needed to improve the convergence. A factor above unity might rarely speed up the convergence. Relaxed variable is defined as follows:

$$u'_i = \lambda u_i + (1 - \lambda)u_{i-1},$$

where  $\lambda$  is the factor given with this keyword. The default value for the relaxation factor is unity.

Many of the keywords used to control the `Nonlinear System` have a corresponding keyword for the `Steady State`. Basically the operation is similar except the reference value for the current solution  $u_i$  is the last converged value of the nonlinear system before starting a new loosely coupled iteration cycle. Otherwise the explanations given above are valid.

Steady State Convergence Measure `String`

Steady State Norm Degree `Integer`

Steady State Norm Dofs `Integer`

Steady State Convergence Tolerance Real

Steady State Relaxation Factor Real

Additionally these keywords are located in the Simulation section of the command file.

Steady State Max Iterations Integer

The maximum number of coupled system iterations. For steady state analysis this means it literally, for transient analysis this is the maximum number of iterations within each timestep.

Steady State Min Iterations Integer

Sometimes the coupling is such that nontrivial solutions are obtained only after some basic cycle is repeated. Therefore the user may sometimes need to set also the minimum number of iterations. Sometimes the steady state loop is also used in a dirty way to do some systematic procedures – for example computing the capacitance matrix, or lumped elastic springs. Then this value may be set to an a priori known constant value.

## Chapter 6

# Integration of time-dependent systems

### 6.1 Introduction

Solving time-dependent systems is becoming more and more common in various branches of computational science, as the computer resources grow steadily. ElmerSolver may be adapted to solve such systems. The first order time derivatives may be discretized by using the following methods:

- the Crank-Nicolson method
- the Backward Differences Formulae (BDF) of several orders

In the case of the first order BDF scheme adaptive time-stepping strategy may also be used.

The second order time derivatives are approximated by either using the Bossak method or reformulating the second order equations as equivalent systems of first order equations.

### 6.2 Time discretization strategies

Consider the numerical solution of the evolutionary field equation

$$\frac{\partial \phi}{\partial t} + \mathcal{K}\phi = f, \quad (6.1)$$

where the differential operator  $\mathcal{K}$  does not involve differentiation with respect to time  $t$  and  $f$  is a given function of spatial coordinates and time. The spatial discretization of (6.1) leads to the algebraic equations

$$M \frac{\partial \Phi}{\partial t} + K\Phi = F, \quad (6.2)$$

where  $M$ ,  $K$  and  $F$  result from the discretization of the identity operator, the operator  $\mathcal{K}$  and  $f$ , respectively. The vector  $\Phi$  contains the values of the unknown field  $\phi$  at nodes.

The applications of the first three BDF methods to discretize the time derivative term in (6.2) yield the following systems:

$$\left( \frac{1}{\Delta t} M + K \right) \Phi^{i+1} = F^{i+1} + \frac{1}{\Delta t} M \Phi^i, \quad (6.3)$$

$$\left( \frac{1}{\Delta t} M + \frac{2}{3} K \right) \Phi^{i+1} = \frac{2}{3} F^{i+1} + \frac{1}{\Delta t} M \left( \frac{4}{3} \Phi^i - \frac{1}{3} \Phi^{i-1} \right), \quad (6.4)$$

$$\left( \frac{1}{\Delta t} M + \frac{6}{11} K \right) \Phi^{i+1} = \frac{6}{11} F^{i+1} + \frac{1}{\Delta t} M \left( \frac{18}{11} \Phi^i - \frac{9}{11} \Phi^{i-1} + \frac{2}{11} \Phi^{i-2} \right), \quad (6.5)$$

where  $\Delta t$  is the time step and  $\Phi^i$  is the solution at time step  $i$ . Similarly,  $F^i$  is the value of  $F$  at time step  $i$ .

All the BDF methods are implicit in time and stable. The accuracies of the methods increase along with the increasing order. The starting values for the BDF schemes of order  $n > 1$  are computed using the BDF schemes of order 1, ...,  $n - 1$  as starting procedures. It should be noted that the BDF discretizations of order  $n > 3$  do not allow the use of variable time-step size. Adaptive time-stepping strategy may also be used in the case of the first order BDF scheme.

The adaptive time-stepping is accomplished by first solving the system using a trial time step and then using two time steps the lengths of which equal to the half of that of the trial time step and comparing the results. If the difference between the results is found to be sufficiently small, the use of the trial time step is accepted. Otherwise a new trial time step is defined by dividing the previous trial time step into two steps of equal length and then the procedure is repeated. One may define one's own criterion for determining whether the use of the current time step is accepted. The default criterion is that the norms of the solutions to each system of field equations do not differ more than the given threshold value.

The time discretization of the second order equation

$$M \frac{\partial^2 \Phi}{\partial t^2} + B \frac{\partial \Phi}{\partial t} + K \Phi = F \quad (6.6)$$

using the Bossak method leads to the system

$$\left( \frac{1-\alpha}{\beta(\Delta t)^2} M + \frac{\gamma}{\beta \Delta t} B + K \right) \Phi^{i+1} = F^{i+1} + M \left( \frac{1-\alpha}{\beta(\Delta t)^2} \Phi^i + \frac{\gamma}{\beta \Delta t} V^i + \frac{(1-\alpha)}{2\beta} A^i \right) + B \left( \frac{\gamma}{\beta \Delta t} \Phi^i + \left( \frac{\gamma}{\beta} - 1 \right) V^i + \left( 1 - \frac{\gamma}{2\beta} \right) \Delta t A^i \right), \quad (6.7)$$

where

$$\begin{aligned} V^{i+1} &= V^i + \Delta t \left( (1-\gamma) A^i + \gamma A^{i+1} \right), \\ A^{i+1} &= \frac{1}{\beta(\Delta t)^2} (\Phi^{i+1} - \Phi^i) - \frac{1}{\beta \Delta t} V^i + \left( 1 - \frac{1}{2\beta} \right) A^i, \\ \beta &= \frac{1}{4} (1-\alpha)^2, \quad \gamma = \frac{1}{2} - \alpha. \end{aligned} \quad (6.8)$$

In the following the matrices  $M$  and  $B$  are referred to as the mass and damping matrix, respectively.

### 6.3 Keywords related to time discretization

All the keywords related to the time discretization may be given in Simulation section of the solver input file (.sif file). A number of keywords may also be given in Solver section, so that each system of field equations may be discretized using independently chosen time-stepping method. If keywords are not given in the Solver section, the values of the keywords are taken to be those given in the Simulation section. It should be noted that certain keywords such as those controlling the number of time steps, time-step sizes etc. may only be given in the Simulation section.

**Timstepping Method** *String*

This keyword is used to declare the time discretization strategy for the first order equations. The value of this keyword may be set to be either "BDF" or "Crank-Nicolson" and may be given in either Simulation section or Solver section of the solver input file.

**BDF Order** *Integer*

This keyword is used to define the order of the BDF method and may take values 1,...,5. This keyword may be given in either Simulation section or Solver section of the solver input file.

**Time Derivative Order** *Integer*

If a second order equation is discretized, this keyword must be given the value 2 in the Solver section of the solver input file. It should be noted that the second order time derivatives are always discretized using the Bossak method.

Bossak Alpha Real [-0.05]

This keyword is used to define the value for  $\alpha$  in the Bossak method used in the time discretization of second order equations. This keyword may be given in either Simulation section or Solver section of the solver input file.

Timestep Intervals Integer array

This keyword is used to define the number of time steps. It may be array-valued so that different time-step lengths may be used for different time intervals of the entire simulation. For example, if one wishes to take first 50 time steps and then to use a different time-step length for the following 100 time steps, one may define

```
Timestep Intervals(2) = 50 100
```

and use the Timestep Sizes keyword to define time-step lengths for the two sets of time steps.

Timestep Sizes Real array

This keyword is used to define the length of time step. If the value of the Timestep Intervals keyword is array-valued, the value of this keyword must also be an array of the same size. For example, if one has defined

```
Timestep Intervals(2) = 50 100
```

the declaration

```
Timestep Sizes(2) = 0.1 1.0
```

sets the time-step length for the first 50 time steps to be 0.1 and for the remaining 100 time steps 1.0.

Timestep Function Real

Instead of using the Timestep Sizes keyword the length of time step may be defined by using this keyword. The value of this keyword is evaluated at the beginning of each time step. A variable time-step length may conveniently be defined using a MATC or Fortran function.

Output Intervals Integer array

This keyword is used to define the time-step interval for writing the results on disk. As in the case of the Timestep Sizes keyword the size of the value of this keyword must be compatible with that of the Timestep Intervals keyword. The value at a step  $m$  is saved if for the corresponding output interval  $o \bmod (m-1, o) = 0$ . An exception is output interval equal to zero for which output is not saved at all. However, the last step of the simulation is always saved.

Lumped Mass Matrix Logical [false]

The use of a lumped mass matrix may be activated by setting the value of this keyword to be True in the Solver section of solver input file. The default lumping is defined by

$$M'_{ii} = M_{ii} \frac{\sum_i \sum_j M_{ij}}{\sum_i M_{ii}}. \quad (6.9)$$

The keywords related to the adaptive time-stepping may only be given in the Simulation section of the solver input file. When the adaptive time-stepping strategy is used, a set of trial time steps is defined using the keywords introduced above. The adaptive procedure is executed for each of these trial steps. Note that the adaptive time-stepping is possible only in the case of the first order BDF scheme.

Adaptive Timestepping Logical [false]

The value of this keyword must be set to be True if the adaptive time integration is to be used.

Adaptive Time Error Real

This keyword is used to define the threshold value for the criterion for determining whether the use of the current time step is accepted.

**Adaptive Error Measure** *Real*

Using this keyword one may define one's own measure for evaluating the difference between the computed results. This measure and the threshold value, which is given using the **Adaptive Time Error** keyword, may be used to define a user-defined criterion for determining whether the use of the current time step is accepted. The value of the **Adaptive Error Measure** keyword is evaluated twice for each trial time step. For the first time the value of the keyword is evaluated after the system is solved using the trial time step. The second time is after the system is solved using two time steps the lengths of which equal to the half of that of the trial time step. The absolute value of the relative difference between these two values is compared to the threshold value given by the **Adaptive Time Error** keyword to determine whether the use of the current time step is accepted. If several systems of field equations are solved, all the solutions must satisfy the similar criterion. If this keyword is not used, the default criterion is based on comparing the norms of the solution fields.

**Adaptive Min Timestep** *Real*

Using this keyword one can limit the subsequent division of the trial time steps by giving the minimum time-step length which is allowed.

**Adaptive Keep Smallest** *Integer* [1]

By default the adaptive scheme tries to double the length of the time step after the acceptable time step is found. If a value  $n > 1$  is given for this keyword, the adaptive scheme tries to increase the step length after taking  $n$  steps which are at most as long as the step length accepted.

## 6.4 On the treatment of time derivatives in Elmer Solver code

In the following a number of issues that may be useful if one is writing a code to solve one's own application are explained.

By default Elmer Solver does not generate or use global mass or damping matrices in the solution of time-dependent systems. Mass and damping matrices need to be computed only element-wise, as the linear system resulting from the time discretization, such as (6.3), is first formed element-wise and this local contribution is later assembled to the global system. In the case of the first order equation (6.2) the local linear system may be formed by using the subroutine call

```
CALL Default1stOrderTime( M, K, F ),
```

where  $M$  is the element mass matrix,  $K$  is the element stiffness matrix and  $F$  is the element force vector. In a similar manner, in the case of the second order equation (6.6) one may use the subroutine call

```
CALL Default2ndOrderTime( M, B, K, F ),
```

where  $B$  is the element damping matrix.

Note that these subroutines must also be called for the local matrices and vectors that result from the discretization of neumann and newton boundary conditions. If the boundary conditions do not contain any time derivatives, the  $M$  and  $B$  matrices should be set to be zero before calling the above subroutines.

If the global mass matrix is required, it may be generated by using the subroutine call

```
CALL DefaultUpdateMass( M )
```

Similarly, the global damping matrix may be generated by using the subroutine call

```
CALL DefaultUpdateDamp( B ).
```

Global mass (and possibly damping) matrices are required, for example, in the solution of eigenvalue problems. One may also implement one's own time-stepping scheme at the global level using these matrices.

# Chapter 7

## Solving eigenvalue problems

### 7.1 Introduction

Eigenvalue problems form an important class of numerical problems, especially in the field of structural analysis. Also some other application fields may have eigenvalue problems, such as those in density functional theory. This manual, however, introduces eigenvalue computation in Elmer using terminology from elasticity.

Several different eigenvalue problems can be formulated in elasticity. These include the “standard” generalized eigenvalue problems, problems with geometric stiffness or with damping, as well as stability (buckling) analysis. All of the aforementioned problems can be solved with Elmer. The eigenproblems can be solved using direct, iterative or multigrid solution methods.

### 7.2 Theory

The steady-state equation for elastic deformation of solids may be written as

$$-\nabla \cdot \tau = \vec{f}, \quad (7.1)$$

where  $\tau$  is the stress tensor. When considering eigen frequency analysis, the force term  $\vec{f}$  is replaced by the inertia term,

$$-\nabla \cdot \tau = \rho \frac{\partial^2 \vec{d}}{\partial t^2}, \quad (7.2)$$

where  $\rho$  is the density.

The displacement can now be assumed to oscillate harmonically with the eigen frequency  $\omega$  in a form defined by the eigenvector  $\vec{d}$ . Inserting this into the above equation yields

$$-\nabla \cdot \tau(\vec{d}) = -\omega^2 \rho \vec{d}, \quad (7.3)$$

or in discretized form

$$Ku = -\omega^2 Mu, \quad (7.4)$$

where  $K$  is the stiffness matrix,  $M$  is the mass matrix, and  $u$  is a vector containing the values of  $\vec{d}$  at discretization points. The equation 7.4 is called the generalized eigenproblem.

Including the effects of pre-stresses into the eigenproblem is quite straightforward. Let us assume that there is a given tension field  $\sigma$  in the solid. The tension is included by an extra term in the steady-state equation

$$-\nabla \cdot \tau - \nabla \cdot (\sigma \nabla u) = \vec{f}. \quad (7.5)$$

The pre-stress term includes a component  $K_G$  to the stiffness matrix of the problem and thus the eigenvalue equation including pre-stresses is

$$(K + K_G)u = -\omega^2 Mu. \quad (7.6)$$



The pre-stress in Elmer may be a known pre-tension, due to external loading or due to thermal stress, for example. The stress tensor containing the pre-stresses  $\sigma$  is first computed by a steady-state analysis and after that the eigenvalue problem is solved. It should be noted though that the eigenvalue problem in a pre-stressed state is solved using first order linearization, which means that the eigenvalues are solved about the non-displaced state. If the pre-loading influences large deformations the eigenvalues are not accurate.

The eigenvalue problem with pre-stresses may be used to study the stability of the system. Some initial loading is defined and a pre-stress tensor  $\sigma$  is computed. This tensor is then multiplied by a test scalar  $\lambda$ . The critical load for stability, or buckling, is found by setting the force on the right hand side of the equation 7.5 equal to zero. The problem then is to solve  $\lambda$  from

$$Ku = -\lambda K_G u, \quad (7.7)$$

which again is formally an eigenvalue problem for the test parameter. The critical loading is found by multiplying the given test load with the value of  $\lambda$ . In other words, if  $\lambda > 1$  the loading is unstable.

### 7.2.1 Damped eigenvalue problem

Finally, let us consider the damped eigenproblem, also called quadratic eigenvalue problem. In this case there is a force component proportional to the first time derivative of the displacement in addition to the inertia term

$$-\nabla \cdot \tau = -\delta \frac{\partial \vec{d}}{\partial t} + \rho \frac{\partial^2 \vec{d}}{\partial t^2}, \quad (7.8)$$

where  $\delta$  is a damping coefficient. The problem is transformed into a more suitable form for numerical solution by using a new variable  $\vec{v}'$  defined as  $\vec{v}' = \frac{\partial \vec{d}}{\partial t}$ . This yields

$$-\nabla \cdot \tau = -\delta \vec{v}' + \rho \frac{\partial \vec{v}'}{\partial t}. \quad (7.9)$$

Working out the time derivatives and moving into the matrix form, the equation may be written as

$$Ku = -Dv + i\omega Mv, \quad (7.10)$$

or,

$$-i\omega \begin{pmatrix} I & 0 \\ 0 & M \end{pmatrix} \begin{pmatrix} u \\ v \end{pmatrix} = \begin{pmatrix} 0 & I \\ -K & -D \end{pmatrix} \begin{pmatrix} u \\ v \end{pmatrix}, \quad (7.11)$$

where  $i$  is the imaginary unit,  $D$  is the damping matrix, and  $v$  a vector containing the values of  $\vec{v}'$  at the discretization points. Now the damped eigenproblem is transformed into a generalized eigenproblem for complex eigenvalues.

Finally, to improve the numerical behavior of the damped eigenproblem, a scaling constant  $s$  is introduced into the definition  $s\vec{v}' = s \frac{\partial \vec{d}}{\partial t}$ . In the matrix equation 7.11 this influences only the identity matrix blocks  $I$  to be replaced by  $sI$ . Good results for numerical calculations are found when

$$s = \|M\|_{\infty} = \max |M_{i,j}|. \quad (7.12)$$

## 7.3 Keywords related to eigenvalue problems

An eigenvalue analysis in Elmer is set up just as the corresponding steady-state elasticity analysis. An eigenvalue analysis is then defined by a few additional keywords in the Solver section of the `sif` file. The solver in question can be linear elasticity solver called Stress Analysis, linear plate elasticity solver, or even nonlinear elasticity solver, though the eigen analysis is, of course, linear.

Many of the standard equation solver keywords affect also the eigen analysis, *e.g.* the values given for Linear System Solver and Linear System Iterative Method in case of an iterative solver. More information about these settings is given in this Manual under the chapter concerning linear system solvers. The specific keywords for eigen analysis are listed below

**Eigen Analysis** `Logical`

Instructs Elmer to use eigensystem solvers. Must be set to True in all eigenvalue problems.

**Eigen System Values** `Integer`

Determines the number of eigen values and eigen vectors computed.

**Eigen System Select** `String`

This keyword allows the user to select, which eigenvalues are computed. The allowable choices are

- Smallest Magnitude
- Largest Magnitude
- Smallest Real Part
- Largest Real Part
- Smallest Imag Part
- Largest Imag Part

Smallest magnitude is the default.

**Eigen System Shift** `Real`

Gives an offset in the eigenvalues. May be useful if the user is interested in eigenvalues in a specific pre-defined frequency-regime, for example. In practice the shift  $\omega_0^2$  is achieved by defining  $K := K - \omega_0^2 M$  and solving the eigenvalues of this modified system.

**Eigen System Convergence Tolerance** `Real`

The convergence tolerance for iterative eigensystem solver. The default is 100 times Linear System Convergence Tolerance.

**Eigen System Max Iterations** `Integer`

The number of iterations for iterative eigensystem solver. The default is 300.

**Eigen System Complex** `Logical`

Should be given value True if the eigen system is complex, *i.e.* the system matrices are complex. Not to be given in damped eigen value analysis.

**Geometric Stiffness** `Logical`

Defines geometric stiffness (pre-stress) to be taken into account in eigen analysis. This feature is only available with linear bulk elasticity solver.

**Stability Analysis** `Logical`

Defines stability analysis. This feature is only available with linear bulk elasticity solver.

**Eigen System Damped** `Logical`

Defines a damped eigen analysis. Damped eigen analysis is available only when using iterative solver.

**Eigen System Use Identity** `Logical`

If True defines the relation displacement and its derivative to be  $s\vec{v}' = s\frac{\partial \vec{d}}{\partial t}$ . The other possibility is to use  $M\vec{v} = i\omega M\vec{u}$ . The default is True.

**Eigen System Lanczos Vectors** `Integer`

Number of Lanczos vectors that are used to compute the eigenvalues. The default is  $3N_e + 1$ , where  $N_e$  is the number of eigenvalues.

**Eigen System Compute Residuals** `Logical`

Computes the residuals of the eigen value system.

## 7.4 Constructing matrices $M$ and $D$ in Solver code

In eigen analysis the mass matrix  $M$  and the damping matrix  $D$  have to be separately constructed. Usually in Elmer the different matrices are summed into a single matrix structure, since the final linear equation is of the form  $Ax = b$ , and there is no need for separate values of the mass matrix and the stiffness matrix.

The matrix is represented in Elmer using compressed row storage (CRS) format, as explained in chapter about Linear system solvers. The matrix structure holds also vectors for the values of the mass and damping matrices

```
TYPE Matrix_t
...
REAL(KIND=dp), POINTER :: MassValues(:), DampValues(:)
...
END TYPE Matrix_t
```

These arrays use the same Rows and Cols tables than the normal Values array.

The mass and damping matrices are constructed elementwise in a similar manner as the stiffness matrix. After each element the local contributions are updated to the equation matrices by the following subroutine calls

```
CALL DefaultUpdateEquations( STIFF, FORCE )

IF ( Solver % NOFEigenValues > 0 ) THEN
  CALL DefaultUpdateMass( MASS )
  CALL DefaultUpdateDamp( DAMP )
END IF
```

In this segment of code the variables STIFF, MASS, DAMP and FORCE store the local values of the stiffness matrix, the mass matrix, the damping matrix, and the right hand side of the equation, respectively. The integer NOFEigenValues if the Solver data structure gives the number of eigen values requested. Here it is used as an indicator of whether the mass and damping matrices need to be constructed.

The eigenvalues and eigenvectors are stored in the arrays Solver % Variable % EigenValues and Solver % Variable % EigenVectors,

```
TYPE Variable_t
...
COMPLEX(KIND=dp), POINTER :: EigenValues(:)
COMPLEX(KIND=dp), POINTER :: EigenVectors(:, :)
...
END TYPE Matrix_t
```

and the eigenvector corresponding to the eigenvalue  $i$  is found in Solver % Variable % EigenVectors( $i, :$ ).

# Chapter 8

## Generic solver utilities

When the solvers use the default procedure for solving the differential equations there are a number of generic features that may be used with any equation. This chapter describes these features.

### 8.1 Solver activation

There is a large number of different ways how solvers need to be activated and deactivated. Mostly there needs are related to different kinds of multiphysical coupling schemes. Also there is a large number of auxiliary solvers that are needed, for example, only when results are saved or inspected. In the `Solver` section one may give the following keywords.

`Exec Solver String`

The options are `never`, `always`, `before timestep`, `after timestep`, `before all`, `after all`, `before saving`, `after saving`. If nothing else is specified the solver is called every time in its order of appearance. The saving instance refers to the one defined by `Output Intervals` and used to save the results.

`Exec Intervals Integer`

This keyword gives an interval at which the solver is active. At other intervals the solver is not used. This should have the same length as `Timestep Intervals` in the `Simulation` section.

`Start Time Real`

The start time after which the execution of the solver is started.

`Stop Time Real`

The stop time after which the execution of the solver is halted.

### 8.2 Variable names

The variable name is presented in the `Solver` section by keyword `Variable`, for example

`Variable = Varname`

This name is used when setting Dirichlet conditions and initial conditions. Also the name is used as a basis for other features appending it with suffixes such as `Load`, `Condition` and `Passive`, described later in this chapter.

Sometimes one wants to give rename the components of the primary variable. This may be done in defining the component names in the brackets, for example.

`Variable = Flow[Velo:2 Pres:1]`

Declares that variable `Flow` consists of `Velo` with two components and `Pres` with one component. If the number of components is 2 or 3 the variable will be treated as a vector in the ElmerPost files.

If one does not require output for a given variable one may declare it with the `-nooutput` option e.g.

```
Variable = -nooutput Dummy
```

If one wants to declare the number of dofs of the variable One may also use the `-dofs` option to define the number of components in a variable e.g.

```
Variable = -dofs 3 Flow
```

By default variables are assumed to be field variables. However, they may also be scalars which have globally the same value. These variables may also be introduced with the `-global` option e.g.

```
Variable = -global Frequency
```

After defining a global variable it may be used similarly to `time` in giving dependencies.

These different options should not be fully mixed.

### 8.3 Exported variables

Each solver that has a primary variable (defined by the `Variable` keyword) may also have exported variables. This is active at the value of exported variables may be set either in `Body Force` or in `Boundary Condition Section` by defining the value on the r.h.s. of the `variablename`. To update the same nodes as the primary variable, and may have the same optional arguments.

The intent of exported variables is to enable automatic allocation and treatment of additional data that may usually be derived from the primary fields. Often this is done within the Solver and many times the machinery is used transparently from the user.

Upon request the exported variables may also be defined by the user in the `Body Force` and `Boundary Condition` sections. The operation is set behind keywords to circumvent unwanted definitions.

```
Solver solver id
```

```
Exported Variable i Varname
```

A name for an additional variable computed by the solver,  $i=1, 2, 3, \dots$

```
Update Exported Variables Logical
```

Update the exported variables after leaving the iterative solution for the next solver i.e. in the steady-state level.

```
Nonlinear Update Exported Variables Logical
```

Update the exported variables within the nonlinear solution for the current.

### 8.4 Dirichlet conditions

In finite element method there are different kinds of boundary conditions. In the essential boundary conditions the value of the field is set at the boundary. These are also called *Dirichlet* boundary conditions. The other types of boundary conditions typically involve setting a flux, force that may sometimes also be dependent on the solution. These boundary conditions, for example Neumann and Robin boundary conditions, are more problem specific and the user is directed to the Models Manual for more details on them.

Technically the Dirichlet conditions in ElmerSolver are set through manipulating only the values in the matrix rather than its structure. To be more specific, in setting the degree of freedom with index  $i$  the  $i$ :th row of the matrix is set zero, except for the diagonal which is set to be unity. When also the r.h.s. of the equation is set to the desired value, the solution will satisfy the Dirichlet condition. The Dirichlet conditions may be set to existing boundary elements. Additionally Dirichlet conditions may be set for set of nodes that are created on-the-fly.

Usually the Dirichlet conditions are given at objects which have a lower dimension than the leading dimension in the geometry, i.e. for 3D problems values are usually fixed only at 2D faces. However, it is

possible also to set the conditions for the bodies also. This may be particularly useful when the condition is only conditional.

There is a handicap with this procedure which is that the symmetry of the original matrix will be lost. This may affect the performance of linear system solvers. To ensure to symmetry of the matrix equation there are two remedies. Also the column may be zeroed and the known values may be subtracted from the r.h.s. The second option is to eliminate all the rows and columns related to the known values. This reduces the size of the matrix but of has an additional cost as a secondary matrix is created and the values are copied into it.

Sometimes the Dirichlet conditions should depend on other variables in a way which defined whether or not to set the conditions at all. For example, the temperature at a boundary should be defined only if the flow is inside the boundary. For outflow the definition of the temperature is not physically justified. For this kind of purposes the user may give a condition that is a variable in itself. If this variable is positive the Dirichlet condition is applied,

Boundary Condition `bc id`

Target Boundaries(n) `Integer`

The set of boundaries for which the Dirichlet conditions will be applied on.

Target Nodes(n) `Integer`

Sets point conditions on-the-fly. These points refer to the absolute indexing of the nodes.

Target Coordinates(n,DIM) `Real`

Ccoordinate values which are transformed into nodal indexes corresponding to the nearest nodes at the time of first call. Target groups defined by Target Boundaries, Target Nodes, and Target Coordinates should not reside in the same boundary condition definition.

Varname `Real`

Each variable which has an equation that is solved for, may be set by giving its value at the boundary conditions section. If the variables are not listed in the keyword listing the user should also define the type which is `Real`.

Varname i `Real`

For multicomponent fields the Dirichlet condition may be set to each field separately.

Varname Condition `Real`

The Dirichlet condition related to the variable is set active only if the condition is positive.

The Dirichlet conditions for bodies. It is also possible to set the values of exported variable here with exactly same logic.

Body Force `body force id`

Varname `Real`

The setting of Dirichlet conditions for the whole body follows the same logic as for the boundaries. When the body force is assigned to a body the values will be fixed as defined.

Varname Condition `Real`

The conditional Dirichlet condition may also be given for bodies.

These may be use in conjunction with the Dirichlet conditions to affect the setup of the matrix equation.

Solver `solver id`

Linear System Symmetric `Logical True`

Make the matrix symmetric by eliminating the known values from the r.h.s and zeroing the matrix entries.

Before Linsolve `"EliminateDirichlet" "EliminateDirichlet"`

Creates a secondary matrix with a reduced size by eliminating Dirichlet conditions and passing this to the linear system solver.

## 8.5 Soft Limiters

The user may set soft lower and upper limits to the values of the field variable. For example, concentration can never be negative and hence a zero lower limit could be applied for it. The limits are applied in an iterative manner defining a contact set where Dirichlet conditions are applied. A node is included in the contact set when its value passed the limits, and a node is released from the contact set when the nodal load related to it is negative (or positive). The limiters may be applied to both boundary conditions and bodies.

Solver `solver id`

Apply Limiter `Logical True`

Activates the search for limiters and also activate the computation of nodal loads.

Limiter Value Tolerance `Real`

Defines the tolerance of the field value by which a node is added to the contact set.

Limiter Load Tolerance `Real`

Defines the tolerance of the nodal load by which a node is removed from the contact set.

Limiter Load Sign Negative `Logical`

The default sign used for determining the contact set is derived from the default discretization of the Poisson equation. If the equation would be multiplied by  $-1$  the load would also change sign. That in mind, a possibility to influence the rules is given with this keyword.

Boundary Condition `bc id`

Varname Lower Limit `Real`

The lower limit of field variable.

Varname Upper Limit `Real`

The upper limit of field variable.

Body Force `body force id`

Varname Lower Limit `Real`

The lower limit of field variable.

Varname Upper Limit `Real`

The upper limit of field variable.

## 8.6 Periodic conditions

Periodic BCs may be considered to be a special case of Dirichlet conditions where the fixed value is given as linear combination of other unknown values. The periodic boundary conditions in Elmer are very flexible. In fact they may even be antiperiodic.

Boundary Condition `bc id`

Periodic BC `Integer`

This refers to the counterpart of the periodic boundary condition. This means that periodic boundaries come in pairs, and for the other boundary you only need to give pointer to.

Periodic BC Explicit `Logical`

Sometimes the implicit periodic BCs (the default) leads to convergence problems, also it complicates the matrix structure by adding additional connections. Then the explicit type of periodic conditions may be a good alternative. Note that it requires iteration even for a linear operator.

Periodic BC Translate(3) `Real`

The periodic boundary is mapped to the other boundary by three different operations: translation, rotation and scaling. This generality is not usually needed and therefore default value is used. For the translation vector the default is the vector that is obtained when moving in the normal direction of the first boundary until the target boundary is hit. If this is not desired the user may give another translation vector using this keyword.

Periodic BC Rotate(3) `Real`

By default no rotation is performed prior to the mapping of values. This keyword may be used to give the angles of rotation. There is no automatic rotation, but there is some detection of the correctness of the rotation.

Periodic BC Scale(3) `Real`

This keyword may be used to give a scaling vector if this is desired. If this is not given an isotropic scaling will be used to map the bounding boxes of the two boundaries to the same size.

Periodic BC VarName `Logical`

The user should define the variables that are to be periodic in nature. This is done by attaching their names into logical expressions following the string `Periodic BC`.

Anti Periodic BC VarName `Logical`

The variable may be also antiperiodic i.e. the absolute value is the same but the sign is different. Then this should be used instead.

Periodic BC Use Lagrange Coefficients `Logical`

By default the periodic BCs are handled by elimination. The other alternative is to use Lagrange coefficients. This strategy is enforced by setting this keyword `True`.

## 8.7 Mortar conditions

The motivation for implementing mortar finite element framework into Elmer came from the simulation of rotating electrical machines. There the continuity of solution between rotor and stator must be satisfied. Both parts are assumed to have their own fixed meshes that move in respect to each other. The principal complication associated with the moving mesh approach is that the finite element meshes are then generally non-matching across the model boundaries which represent the interaction surface  $\Gamma$  shared by the rotating and surrounding bodies. It follows that the usual continuity requirements to obtain a conforming finite element approximation over the entire domain cannot be satisfied. To this aim a monolithic solution strategy based on the mortar finite element method has been implemented.

The mortar conditions in Elmer are related to the periodic boundary conditions in that they share some common routines and techniques. The mortar conditions may be dynamic whereas the periodic conditions are assumed to be fixed.

The mortar condition quite simply states

$$\int (u_1 - u_2) \phi_M d\Gamma_M = 0 \quad (8.1)$$

where the integration is over the master element(s),  $u_1$  the value of the matched quantity at the master side and  $u_2$  the quantity at the slave side. The integration is accomplished in practice by searching the master element integration points within the slave elements. Using the appropriate basis functions we have linear system

$$Mu_1 = Nu_2 \quad (8.2)$$

relating the degrees of freedom at each side.

$$\begin{aligned} M_{ij} &= \int \phi_M^j \phi_M^i d\Gamma_M \\ N_{ij} &= \int \phi_S^j \phi_M^i d\Gamma_M \end{aligned} \quad (8.3)$$

All the integrations points of the master elements must be locatable in the set of slave elements. Therefore the slave boundary may be larger than the master boundary but never vice versa. To enforce the constraint in the original system a constraint matrix is constructed such that

$$C = [M - N] \quad (8.4)$$

this constraint is then added to the original system using the Lagrange coefficient procedure

$$\begin{bmatrix} A & C^T \\ C & 0 \end{bmatrix} \begin{bmatrix} u \\ \lambda \end{bmatrix} = \begin{bmatrix} f \\ 0 \end{bmatrix} \quad (8.5)$$



## Dimensional reduction for projectors

When we are studying problems where we know the potential contact surface (or line), a priori dimensional reduction of the master and slave elements may be useful. For example in rotational problems the elements may be mapped from  $(x, y, z)$  coordinates to  $(\theta, z)$  coordinates since the  $r$  coordinate should be the same by construction. Finding the master nodes from the slave elements becomes then somewhat easier as we avoid the problem of two mismatching polygons.

Similarly if we know that a projector is performed between two symmetry planes in a cylindrical system we may be dimensional reduction map the coordinates from  $(x, y, z)$  to  $(r, z)$ .

Also dimensional reduction may be performed for problems that are known to take place on an level. For example, we may use  $(x, y)$  plane for the mapping instead of the full 3D coordinates.

When using the reduction to  $(\theta, z)$  plane we may also consider periodicity of the projector. Assuming that the slave nodes are in interval  $[\theta_{min}, \theta_{max}]$  such that  $2\pi/(\theta_{max} - \theta_{min})$  is an integer we may always map the angle  $\phi$  to the existing interval from anywhere in  $[0, 2\pi]$ . Similar repeated projector could basically also be taking place in translation between two planes if their structure would be periodic.

## Integration of mortar projector

When performing the integration there are several ways how the integration and search is carried out. Which one is optimal depends greatly on how the mesh is configured.

If the mesh is basically conforming and the need for projector is caused by the internally created discontinuity (using keyword `Discontinuous Boundary`) we have the luxury that there is an exact correspondence between a master and a slave element. Then an exact projector may be computed with a minimal effort. By default the projector is of mass matrix type but also a diagonal projector may be created by mass lumping. This branch of projectors is invoked if the corresponding `Mortar BC` is given value zero. This approach works also in parallel, at least if the boundary halo is saved during the partitioning process.

In some cases of rotating machines created by extrusion we have the luxury that the nodes are only at specific levels. This makes it easier to have an accurate integration over the intersection of the elements. In the current implementation of `Level Projector` it is assumed that the surface elements are quadrilaterals and only one side is skewed. The integration is performed by checking whether any two master and slave element cross each other and creating an temporal triangularization for their intersection. This is an  $N^2$  loop but for typical cases it is still not a bottle-neck. This approach may work in parallel when using a tailored partitioning algorithm that distributes the elements such that they by construction will be in the same partitioning as their counterpart.

A generic approach is used if we have no simplifications that we could utilize when integrating over the master and slave elements. The integration utilizes oct-tree based search algorithm. Unfortunately the integration is not accurate which may result to accuracy and convergence problems of the resulting constrained linear system. Currently there is no way to perform parallel communication when performing the integration.

## Solving linear systems with Mortar projectors

The Lagrange coefficient procedure results to a matrix that is indefinite. Any Krylov method capable of handling indefinite matrices should be applicable to the constrained system. In practice the GCR and BiCGStab(L) methods in Elmer has been used successfully in applications. The constraint equations can be effectively preconditioned using ILU (for example). Current implementation in Elmer uses a preconditioning matrix

$$P = \begin{bmatrix} P_0 & C^T \\ C & 0 \end{bmatrix} \quad (8.6)$$

We usually use  $P_0 = A$ , the unconstrained system coefficient matrix. For the ungauged edge element discretization of the A-V formulation we however select

$$P_0 = I \quad (8.7)$$

for magnetostatic cases, and

$$P_0 = \begin{bmatrix} I & 0 \\ 0 & A_V \end{bmatrix} \quad (8.8)$$

for dynamic cases,  $A_V$  being the scalar potential diagonal block of the A-V formulation. Currently we are not using any gauging for the rot-rot systems and therefore the direct solvers are not available for solution of these systems.

Currently the mortar projector assumes that each node in the master boundary may be found in the slave boundary of the same partition. This limits the current parallelization strategy such that ownership of the mortar boundaries must be carefully considered when making the partitioning. If the ownership issues is honoured, standard iterative parallel linear solvers may be used for solving the constrained system.

## Keywords for Mortar projector

Solver `solver id`

Apply Mortar BCs `Logical`

Enforces the application of Mortar BCs. This is not by default set to `True` partly because at the time of writing this the machinery is still under development. If this flag is set true then the mortar BCs are applied to the variable related to this solver. Otherwise the mortar projectors are not applied to the solver variable.

Edge Basis `Logical`

Activates the use of edge basis functions for the mortar conditions also activates the use of the special preconditioning matrix described above.

Boundary Condition `bc id`

Mortar BC `Integer`

This is set at the master boundary to refer to the boundary condition index of the corresponding slave boundary. The mortar boundaries always come in pairs, the settings are only given to the master boundary.

Rotational Projector `Logical`

The 3D interface may be flattened to 2D plane by several ways. The flattened geometry results to better interpolation accuracy since it is never faceted. Use the  $(\theta, z)$  coordinate system when computing the projector. The angle may have a discontinuity around 180 degrees the `Level Projector` has special way to deal with cases that make a full circle.

Anti Rotational Projector `Logical`

As the previous one but if the module or the periodic cycle is odd use a negative coefficient in enforcing the periodicity. This way the mortar projector becomes antiperiodic.

Sliding Projector `Logical`

Perform dimensional reduction so that only two of the coordinates are accounted for. By default this means mapping to  $(x, y)$  plane.

Anti Sliding Projector `Logical`

As the sliding projector except if the mapping of the sliding projector cycle is odd use negative coefficient in the mortar projector.

Radial Projector `Logical`

Use the  $(r, z)$  coordinate system when computing the projector.

Mortar BC Scaling `Real`

The coefficient at which the values are scaled when enforcing continuity over mortar interface. The default is one.

Level Projector `Logical`

Level projector assumes that the projected surfaces consist of quadrilaterals with edges at constant  $z$ -levels. This projector may use either strong or weak strategies to find the mapping for edges and nodes. There are many additional keywords that apply to the Level Projector.

Level Projector Nodes Strong Logical

This uses strong projector for the nodes. Default is False i.e. weak projector is used.

Level Projector Plane Edges Strong Logical

For extruded geometry some edges will always be aligned with the plane. For these edges it seems natural to use only the other edges on the same constant z-plane to create the projector. Then this keyword should be set True. The default is False.

Level Projector Extruded Edges Strong Logical

The extruded edges are the ones that are created when the 2D mesh is extruded into the 3rd direction. So they are aligned with the z-axis. If the mesh is skewed then the extruded edges will not be easily mapped anymore. It seems also that even though the radial skewed boundaries retain the flatness when creating the projector, a strong projector should not be used for them. The default for this is False.

Projector Skip Nodes Logical

The Level Projector may skip to create the projector for the nodes. This would be the choice when there are no nodal degrees of freedom for the Solver. Also there could be a physical reason that would make this obsolete.

Projector Skip Edges Logical

Also the edge projector degrees of freedom may be skipped. They will be created by default if there are edges associated in the mesh.

Save Projector Logical

Save the projector values to an external file. Mainly for debugging purposes. Default is False.

## 8.8 Setting nodal loads

Similarly to the Dirichlet values one may also set nodal loads i.e. entries for the r.h.s. of the matrix equation. Generally there are good reasons to avoid the use of nodal loads as they are mesh dependent. There are, however, some uses also for setting nodal loads. For example, in multiphysical couplings sometimes it may be a good solution to transfer the forces directly in nodal form as this is the most accurate way to compute the forces resulting from the discrete system.

Body Force bf id

Varname Load Real

Sets the given value to the r.h.s. of the matrix equation related to the solution of the variable. Note that this value is a nodal quantity. The nodal loads are given exactly as the Dirichlet conditions except that a string Load is attached to the name of the variable.

## 8.9 Computing nodal loads

It is possible to evaluate the nodal loads after the solution is computed. This however, requires that the original matrix  $A_0$  that has not been eliminated for Dirichlet conditions is saved. Then the the nodal forces may be computed from

$$f = A_0 x - b. \quad (8.9)$$

It should be noted that the nodal value is mesh dependent. For heat equation it will be in Watts and for electrostatic equation in Coulombs, for example.

Solver solver id

Calculate Loads Logical True

This keyword activates the computation of nodal loads. The resulting values will be saved to variable which is derived from the primary variable by adding the suffix Loads to it.

## 8.10 Energy norm

When the initial matrix is known an energy norm may be computed

$$E = x^T A_0 x. \quad (8.10)$$

Solver solver id

Calculate Energy Norm Logical True

Activates the computation of the energy norm. The result will be saved to the Simulation block with name res: VarName Energy Norm which may further be saved by SaveScalars. The energy norm may only be computed when also the loads are computed.

## 8.11 Computing nodal weights

The nodal weights often give the best approximation of boundary fluxes, for example. However, they are in cumbersome units as the nodal loads depend very much on the meshing. It would be more ideal to transfer the loads into distributed fields. To this aim there is a possibility to compute just the nodal weights associated to a finite element mesh and its standard integration scheme. The sum of all weights should be the volume (or area) of the domain occupied by the elements.

Solver solver id

Calculate Weights Logical True

This keyword activates the computation of nodal weights.

## 8.12 Active and passive elements

In Elmer it is possible to define certain areas of the modeled geometry passive during the solution. This feature allows also deactivating and reactivating of the elements. An element being passive means that its contribution is not included into the global matrix equation. One could, for example, model two separate bodies heated with different heating power, and connect them with a third structure only after suitable time has elapsed. This all could be modeled within a single simulation.

The geometry of the whole system is meshed as usual, and the passive elements are only omitted from the equations. The passive definition is done solverwise and elementwise. The former means that, eg., the temperature may be passive and the displacements active at the same element. The passive property of elements is defined with a real valued parameter with the name constructed from the name of the variable followed by Passive in the Body Force section. When the parameter obtains a value greater than zero the element is passive.

Body Force body force id

Varname Passive Real

If this variable obtains a positive value the element is set passive and assembled for. Note that it is not possible to control components of vector valued variables separately.

## 8.13 Timing the solvers

Often it is of interest to time the performance of the different steps in the solution sequence. For that purpose there are some keyword for activating timers for the solvers.

Solver solver id

Linear System Timing Logical True

This keyword activates the timing for the linear system.

Linear System Timing Cumulative Logical True

This keyword sums up the cumulative time used for in the linear systems.

Solver Timing Logical True

This keyword activates the timing for the whole solver including iteration over nonlinear and linear systems etc. The time used for assembly may roughly be estimated as the difference between the linear solution time and total time used in the solver.

Solver Timing Cumulative Logical True

As the previous one but sums up the cumulative time used in the solver.

# Chapter 9

## Meshing Utilities

ElmerSolver includes some internal possibilities to affect the mesh. These include the ability to split the mesh repeatedly on a partitioned level (mesh multiplication), the possibility to extrude meshes within the code, and the possibility to create discontinuous meshes on-the-fly. These features make it possible to eliminate some meshing bottle-necks and to implement more versatile physical boundary conditions, for example.

### 9.1 Coordinate transformation

By default Elmer read in coordinates  $\vec{r} = (x, y, z)$  as they are in the mesh files. The user may perform scaling such that  $\vec{r} := C \vec{r}$ . Here  $C$  may be either a scalar or a diagonal matrix that maps each coordinate differently. It could be user to scale the units of the mesh back to metres if they are initially given in mm.

The coordinates  $(x, y, z)$  may be mapped to any order by a suitable permutation which is any ordered list of numbers 1, 2 and 3. The mapping could be useful, for example, if the initial coordinate system has the rotational axis at  $x$ -axis whereas Elmer always assumes that the rotational axis is the  $y$ -axis.

Coordinate transformations can be used to map the cartesian coordinates to some other coordinate system and vice versa. Currently supported transformations are from cartesian to cylindrical,

$$r = r_0 + \sqrt{x^2 + y^2} \quad (9.1)$$

$$\phi = \arctan(y, x) \quad (9.2)$$

$$z = z \quad (9.3)$$

and cylindrical to cartesian,

$$x = \cos(\phi)(r + r_0) \quad (9.4)$$

$$y = \sin(\phi)(r + r_0) \quad (9.5)$$

$$z = z. \quad (9.6)$$

The following keywords are related to coordinate transformations

Simulation

Coordinate Scaling Real

The coefficient used to scale the coordinate.

Coordinate Mapping(dim) Integer

Permutation of the coordinates.

Coordinate Transformation String

Options are "cartesian to cylindrical", "cylindrical to cartesian" and "previous".

Coordinate Transformation Radius Real

The offset  $r_0$  in radius.

Note that the `Coordinate Transformation` may also be given in the Solver section which can then be used to invoke different coordinate systems for different solvers.

## 9.2 Mesh multiplication

Mesh multiplication is the process where each mesh edge is splitted into two resulting to an increased number of elements. In 2D each mesh multiplication increases the number of elements by factor of 4, and in 3D by factor of 8 correspondingly. For hexahedral elements this results to eight elements that are of original shape. For tetrahedral elements the innermost octahedron may be split into four tetrahedron in three ways of which only one preserves the minimum angle condition (Delaunay splitting) and this is naturally implemented in Elmer.

The mesh multiplication may be used recursively. This makes it possible to create meshes with a very large number of elements.

The functionality of mesh multiplication may also be used in conjunction with the geometric multigrid of Elmer. Saving the meshes of different density gives an optimal hierarchy of meshes.

The main handicap of mesh multiplication is that the geometric description will not be improved during the mesh multiplication. Therefore curved boundaries will be as faceted as they were in the coarsest mesh level.

Elmer includes also a feature for maintaining mesh grading. For simple geometries the mesh grading may be conserved with the following scheme:

1. Solve at the coarsest level with Galerkin method the nodal mesh parameter from the equation  $h = V_e^{1/m}$ , where  $h$  is the element size factor,  $V_e$  is element volume and  $m$  is the dimension of grading.
2. When splitting an edge for the new mesh inherit the size factor and coordinate from  $h' = \sqrt{h_1 h_2}$  and  $\vec{r}' = (h_1 \vec{r}_2 + h_2 \vec{r}_1) / (h_1 + h_2)$ .

The procedure may be applied recursively. It provides ideal grading for structured boundary layers with  $m = 1$  and homogeneous Delaunay meshes with  $m = \text{dim}$ .

The functionality of mesh multiplication is implemented also in parallel and is very efficient since it requires only quite little communication.

The following keywords are related to the mesh multiplication.

### Simulation

`Mesh Levels` `Integer`

The number of mesh levels when using the equal split feature.

`Mesh Keep` `Integer`

The user may choose to optionally keep more than one level. This could be needed for coarser postprocessing, for example.

`Mesh Keep Grading` `Logical`

When creating meshes using equal split the elements are by default split to equally sized pieces. When this flag is on the solver tries to maintain the mesh grading.

`Mesh Grading Power` `Real`

The mesh grading is evaluated from the element sizes of the initial mesh. The size is a scalar function and cannot therefore handle very complicated meshes. For boundary layer type of meshes optimal value is one, while for Delaunay type of meshes the optimal value is the space dimension.

## 9.3 Mesh extrusion

The feature of mesh extrusion was initially implemented for the needs of computational glaciology where the meshing had become a serious bottle-neck. The current implementation of mesh multiplication takes a 1D or 2D mesh and extrudes it to the desired direction. In the extrusion process the dimension of the

elements also grow. Line segments are extruded into quadrilaterals, triangles into wedges, and quadrilaterals into hexahedrons, correspondingly.

When the mesh is extruded the boundary condition will also be extruded. New boundary conditions may be set to the bottom and top of the mesh. These boundaries will get the 1st free boundary condition index and may thereby be referenced in the `sif` file.

The mesh density of the extrusion is defined only once and this same division is copied for all nodes. So each node gives rise to exactly similar 1D mesh stride in the desired direction.

Because only one division needs to be defined it can be more costly than would be otherwise feasible. Therefore also an iterative process for setting the division has been implemented. There the user can give an arbitrary mesh parameter function  $h(x)$  and a 1D mesh is created so that the mesh position as accurately obeys the desired distribution. The algorithm is an iterative one based on a Gauss-Seidel type of iteration.

First initialize the distribution:

```
do i = 0, n
    w_i = i/n
end
```

Then iterate the distribution until it has converged:

```
do while( max |dw_i| > ε )
    do i = 1, n
        h_i = f((w_i + w_{i-1})/2)
    end
    do i = 1, n - 1
        w_i = (w_{i-1}h_{i+1} + w_{i+1}h_i)/(h_i + h_{i+1})
    end do
    do i = n - 1, 1, -1
        w_i = (w_{i-1}h_{i+1} + w_{i+1}h_i)/(h_i + h_{i+1})
    end do
end do
```

The following keywords are used to control the internal extrusion

Simulation

Extruded Mesh Levels `Integer`

The number of node layers in the extruded mesh. This keyword not only defines the number but also activates the whole feature. The number of node layers is the same over the whole extruded mesh.

Extruded Coordinate Index `Integer`

The index (1,2,3) of the coordinate to be extruded. The default direction is `dim+1`. So for 2D mesh the extrusion is by default carried out to the  $z$ -direction.

Extruded Mesh Ratio `Real`

The ratio of the 1st and last element when extruding the mesh. The element size is assumed to follow a geometric division. The same division is applied for all strides resulting from extruding a node.

Extruded Mesh Density `Real`

This keyword may be used to define an arbitrary functional dependence that defines the local mesh parameter,  $h$ . The function will be automatically called at the interval  $[0, 1]$ . The same division is applied for the strides.

Extruded Min Coordinate `Real`

The mesh is by default extruded to interval  $[0, 1]$ . This keyword may be used to set a new minimum coordinate for the extrusion.

Extruded Max Coordinate `Real`

The mesh is by default extruded to interval  $[0, 1]$ . This keyword may be used to set a new maximum coordinate for the extrusion.



**Preserve Baseline Integer**

Sometimes the user wants to give a boundary condition for the initial baseline of the 2D mesh. This keyword may be used to preserve it for setting the boundary condition. Otherwise only the extruded version of the baseline i.e. higher dimensional creature will be available.

## 9.4 Discontinuous interfaces

Discontinuous interfaces are sometimes needed for internal boundary conditions. For example, in the heat equation a poor thermal contact between objects may lead to a temperature jump at the interface. Such a jump may be difficult to model with standard elements since they cannot reproduce a discontinuity in the mesh. For this purpose a second set of nodes at the interface may be created. All the elements that share nodes at the interface must then be carefully checked to decide on which side of the interface the elements is located, and set the new element indexes accordingly.

For some nodes on the boundary there is some room for interpretation when creating a discontinuous boundary. By default all nodes that have even just one hit on the boundary are doubled i.e. a greedy method is used. The other alternative is to not include nodes which are attached also to other than boundary nodes and their immediate parents. This could be applied mainly to structured meshes with some cut through the mesh. For triangular and tetrahedral meshes the greedy method should be used since in these meshes elements will always have some orphan nodes on the boundary.

After a discontinuity has been created into the mesh the solution will by default be totally discontinuous i.e. no flux will pass through the boundary. To allow again continuous solutions mortar and periodic projectors may be used to ensure continuity. Some field variables may be continuous and some discontinuous over the interface. The projectors with related jump and offset terms will allow this.

The following keywords are used to control the creation of discontinuous boundaries.

**Simulation****Discontinuous Boundary Greedy Logical [True]**

Whether to use the greedy method when defining the discontinuous boundary. The user may choose to set the flag to `False` freeing some corner nodes from being treated as discontinuous.

**Boundary Condition bc\_id****Discontinuous Boundary Logical**

Create discontinuous boundary on-the-fly. The nodes on the boundary are doubled and heuristics is used to determine for each element which of the doubled nodes it should use. Discontinuous boundaries may only be created for internal boundaries.

**Discontinuous Target Body Integer**

This keyword may be used to control the owner of the discontinuous boundary (i.e. the "left" parent element). If not specified the ownership will be given to the parent element with a higher body index.

**Discontinuous BC Integer**

This keyword may be used to activate the creation of the other side of the discontinuous boundary. The other side will be needed if the two boundaries, for example, move in respect to each other. The value of this keyword related to the boundary condition index of the new boundary. Note that also `Mortar BC` and `Periodic BC` keywords will have the same effect but only when they are nonzero! If mortar or periodic boundary condition is requested with a zero argument the discontinuous boundary will not be doubled. Instead a cheaper way to create the mapping between the boundary nodes is used.

# Chapter 10

## Adaptive Solution

### 10.1 Introduction

A posteriori error analysis and adaptive mesh refinement are nowadays standard tools in finite element analysis when cracks, boundary layers, corner singularities, shock waves, and other irregularities are present. A posteriori error indicators can be used to reveal flaws in finite element discretizations and well designed adaptive mesh refinements can reduce the computational costs drastically.

### 10.2 Theory

Let us consider equilibrium equations of the form

$$-\nabla \cdot q = f \text{ in } \Omega, \quad (10.1)$$

$$q \cdot n = g \text{ on } \Gamma, \quad (10.2)$$

where  $q$  is either a flux vector or a second order stress tensor,  $\Omega$  is a computational domain,  $\Gamma$  is a boundary part,  $f$  is an external source or body force,  $g$  is an external flux or traction and  $n$  is the unit outward normal to the boundary.

Most symmetric steady state problems described in the model manual of Elmer [] fit in the above framework of equilibrium equations. To fix ideas, suppose that  $q$  is the heat flux satisfying Fourier's law  $q = -k\nabla T$ , where  $T$  is the temperature and  $k$  is the heat conductivity of the material. We could also think of  $q$  as the stress tensor of linear elasticity. In this case Hooke's law states that  $q = \mathcal{E} : \varepsilon$ , where  $\mathcal{E}$  is the fourth order tensor of elastic coefficients,  $\varepsilon = \text{sym}(\nabla u)$  is the linearized strain tensor and  $u$  is the displacement vector.

#### 10.2.1 A posteriori estimate

Let us denote the finite element approximation of  $q$  by  $q_h$  and measure the error  $q - q_h$  as

$$ERROR = \sqrt{\int_{\Omega} |q - q_h|^2 d\Omega} \quad (10.3)$$

Our primary goal is to ensure the accuracy of the solution by imposing the condition

$$ERROR \leq TOLERANCE \quad (10.4)$$

where  $TOLERANCE > 0$  is an error tolerance prescribed by the user.

In practise, the goal must be replaced by a stronger condition

$$ESTIMATE \leq TOLERANCE \quad (10.5)$$

where  $ESTIMATE$  is a computable functional (of all available data) satisfying

$$ERROR \leq ESTIMATE \quad (10.6)$$

Then, if (10.5) holds, (10.4) is satisfied and the quality of the numerical solution is guaranteed.

In Elmer the a posteriori estimate (10.5) is computed from local residuals of the finite element solution as a weighted sum over the elements,

$$ESTIMATE = \sqrt{\sum_E \eta_E^2}, \quad (10.7)$$

where  $\eta_E$  is the local error indicator for an individual element  $E$ :

$$\begin{aligned} \eta_E^2 = & \alpha_E h_E^2 \int_E |\nabla \cdot q_h + f|^2 d\Omega \\ & + \beta_E \sum_{e \text{ in } \Omega} h_e \int_e |\llbracket q_h \cdot n_e \rrbracket_e|^2 d\Gamma \\ & + \gamma_E \sum_{e \text{ on } \Gamma} h_e \int_e |q_h \cdot n_e - g|^2 d\Gamma \end{aligned} \quad (10.8)$$

Here  $\alpha_E$ ,  $\beta_E$ , and  $\gamma_E$ , are local positive constants. The values of these constants depend, among other things, on the problem to be solved, and must be estimated carefully case by case [1].

The first sum in (10.8) is taken over all edges  $e$  of  $E$  inside the computational domain, the second sum is taken over all edges on the boundary part  $\Gamma$ ,  $\llbracket \cdot \rrbracket_e$  is the jump in  $(\cdot)$  across  $e$ , and  $n_e$  is a unit normal to the edge.  $h_E$  is the size of the element and  $h_e$  is the size of the edge.

The first term on the right-hand-side of (10.8) measures the local residual of the finite element solution with respect to the equilibrium equation (10.1). The second term measures the discontinuity in the numerical flux inside  $\Omega$  and the third term the residual with respect to the boundary condition (10.2).

### 10.2.2 Adaptivity

The secondary goal of our numerical computations is to find a solution satisfying (10.4) as efficiently as possible. A nearly optimal solution strategy is obtained by utilizing the property (here we need to impose some minor restrictions on  $f$  and  $g$ , see [1])

$$LOCAL\ ERROR \geq \eta_E \quad (10.9)$$

where

$$LOCAL\ ERROR = \sqrt{\int_E |q - q_h|^2 d\Omega} \quad (10.10)$$

The estimate suggests that the error in the numerical solution should be reduced efficiently if the mesh is refined locally where the indicators  $\eta_E$  are large. Naturally, we can think of coarsening the mesh where the values of the indicators are small.

The adaptive mesh refinement strategy of Elmer is based on the local estimate (10.9) and on the following additional assumptions and heuristic optimality conditions:

- The local error behaves as

$$\eta_E = C_E h_E^{p_E} \quad (10.11)$$

for some constants  $C_E$  and  $p_E$ .

- In the optimal mesh the error is uniformly distributed over the elements:

$$\eta_E = TOLERANCE / N_{elements} \quad (10.12)$$

The constants  $C_E$  and  $p_E$  in (10.11) can be solved locally for each element if the local errors and the local mesh sizes are known from at least two different solutions. The second rule (10.12) can then be applied to extrapolate a new nearly optimal mesh density for the subsequent calculations.

The mesh refinements can be performed either by splitting the existing elements into smaller using the so called RGB-refinement strategy described in [], or by performing a complete remeshing of the computational domain using the built-in unstructured mesh generators that produce high quality Delaunay triangulations. In the latter alternative not only mesh refinement is possible, but also local adaptive coarsening.

### 10.3 Keywords related to the adaptive solution

The adaptive solver of Elmer is activated and controlled by the following keywords in the Solver block of the solver-input-file.

Adaptive Mesh Refinement `Logical`

If set to true, then after the solution of the linear system the program computes residual error indicators for all active elements, estimates the global error, computes a new mesh density and refines the mesh accordingly.

Adaptive Remesh `Logical`

If set to true, then a complete remeshing is performed after error estimation using the Mesh2D or Mesh3D generators. The new mesh density is written in file “bgmesh”. If set to false, then the RGB-splitting strategy for triangles is applied to perform the refinements.

Adaptive Save Mesh `Logical`

If set to true, the subsequent meshes are stored in directories RefinedMeshN, where N is the number of the adaptive iterate.

Adaptive Error Limit `Real`

Error tolerance for the adaptive solution.

Adaptive Min H `Real`

Imposes a restriction on the mesh size. Default is zero.

Adaptive Max H `Real`

Imposes a restriction on the mesh size. Default is infinite.

Adaptive Max Change `Real`

Controls the change in local mesh density between two subsequent adaptive iterates. Using this keyword the user can restrict the refinement/coarsening to stabilize the adaptive solution process.

### 10.4 Implementing own error estimators

Suppose that we are given a subroutine called MySolver for solving the Poisson equation, and we would like to enhance the code by implementing an a posteriori error indicator for adaptive mesh refinement. The first thing to do is to take the module Adaptive in use, and define the local error indicators as functions in an interface block. The beginning of the subroutine should look like the following:

```
SUBROUTINE MySolver( Model, Solver, Timestep, TransientSimulation )
  USE DefUtils
  USE Adaptive

  INTERFACE
    FUNCTION InsideResidual( Model, Element, Mesh, &
      Quant, Perm, Fnorm ) RESULT( Indicator )
      USE Types
```

```

TYPE(Element_t), POINTER :: Element
TYPE(Model_t) :: Model
TYPE(Mesh_t), POINTER :: Mesh
REAL(KIND=dp) :: Quant(:), Indicator, Fnorm
INTEGER :: Perm(:)
END FUNCTION InsideResidual

FUNCTION EdgeResidual( Model, Edge, Mesh, &
    Quant, Perm ) RESULT( Indicator )
    USE Types
    TYPE(Element_t), POINTER :: Edge
    TYPE(Model_t) :: Model
    TYPE(Mesh_t), POINTER :: Mesh
    REAL(KIND=dp) :: Quant(:), Indicator
    INTEGER :: Perm(:)
END FUNCTION EdgeResidual

FUNCTION BoundaryResidual( Model, Edge, Mesh, &
    Quant, Perm, Gnorm ) RESULT( Indicator )
    USE Types
    TYPE(Element_t), POINTER :: Edge
    TYPE(Model_t) :: Model
    TYPE(Mesh_t), POINTER :: Mesh
    REAL(KIND=dp) :: Quant(:), Indicator, Gnorm
    INTEGER :: Perm(:)
END FUNCTION BoundaryResidual
END INTERFACE

```

After these fixed declarations we may proceed normally by defining the local variables, allocate memory for local tables, integrate the stiffness matrix, set boundary conditions, and solve the problem. Error estimation and adaptive mesh refinements are then performed by calling the subroutine `RefineMesh`, which should appear in the code right after the function `DefaultSolve`.

```

Norm = DefaultSolve()

IF ( ListGetLogical( Solver % Values, 'Adaptive Mesh Refinement' ) ) &
    CALL RefineMesh( Model, Solver, Potential, Permutation, &
        InsideResidual, EdgeResidual, BoundaryResidual )

```

The functions `InsideResidual`, `EdgeResidual` and `BoundaryResidual` defined in the interface block should finally be contained in `MySolve`, and return the values of the error indicators described in the previous section.

As an example, suppose that we are using linear triangles or tetrahedra for solving the Poisson equation. In this case it holds  $\nabla \cdot q_h = 0$  on each element  $E$ , and the contribution of the first term in (7.1) is simply

$$\text{InsideResidual} = h_E \sqrt{\int_E |f|^2 d\Omega} \quad (10.13)$$

The function that computes the value of the inside residual could be written as follows.

```

FUNCTION InsideResidual( Model, Element, Mesh, &
    Quant, Perm, Fnorm ) RESULT( Indicator )
    IMPLICIT NONE
    TYPE(Model_t) :: Model

```

```

INTEGER :: Perm(:)
REAL(KIND=dp) :: Quant(:), Indicator, Fnorm
TYPE( Mesh_t ), POINTER :: Mesh
TYPE( Element_t ), POINTER :: Element

TYPE(GaussIntegrationPoints_t), TARGET :: IP
TYPE(ValueList_t), POINTER :: BodyForce
REAL(KIND=dp) :: f, hK, detJ, Basis(MAX_NODES), &
    dBasisdx(MAX_NODES,3), ddBasisddx(MAX_NODES,3,3), &
    Source(MAX_NODES)
LOGICAL :: stat
INTEGER :: n

Indicator = 0.0d0
Fnorm = 0.0d0
hK = element % hK

BodyForce => GetBodyForce( Element )
Source = GetReal( Element, 'Source' )

IP = GaussPoints( Element )
DO n = 1, IP % n
    stat = ElementInfo( Element, Nodes, IP % u(n), IP % v(n), &
        IP % w(n), detJ, Basis, dBasisdx, ddBasisddx, .FALSE. )
    f = SUM( Source * Basis )
    Fnorm = Fnorm + f**2 * detJ % IP % s(n)
    Indicator = Indicator + f**2 * detJ * IP % s(n)
END DO

Fnorm = SQRT( Fnorm )
Indicator = hK * SQRT( Indicator )

END FUNCTION Inside Residual

```

For the boundary and edge residuals refer to the example `Poisson.f90` in the tutorial manual of Elmer.

# Chapter 11

## Parallel runs

### 11.1 Introduction

In times of even simple desktop PCs containing multiple CPUs or at least multiple cores, parallel computing is a necessity to exploit the complete potential of those architectures. As on multi-core architectures multi-threading (e.g., OpenMP) would be a feasible concept, Elmer utilizes the well established Message Passing Interface standard for inter-process communication. This approach makes it possible to run Elmer on both, multi-core as well as multi processor environments.

#### 11.1.1 Parallel Implementation in Elmer

The general concept of a parallel run within Elmer is displayed in Fig. 11.1. Elmer uses domain decompo-

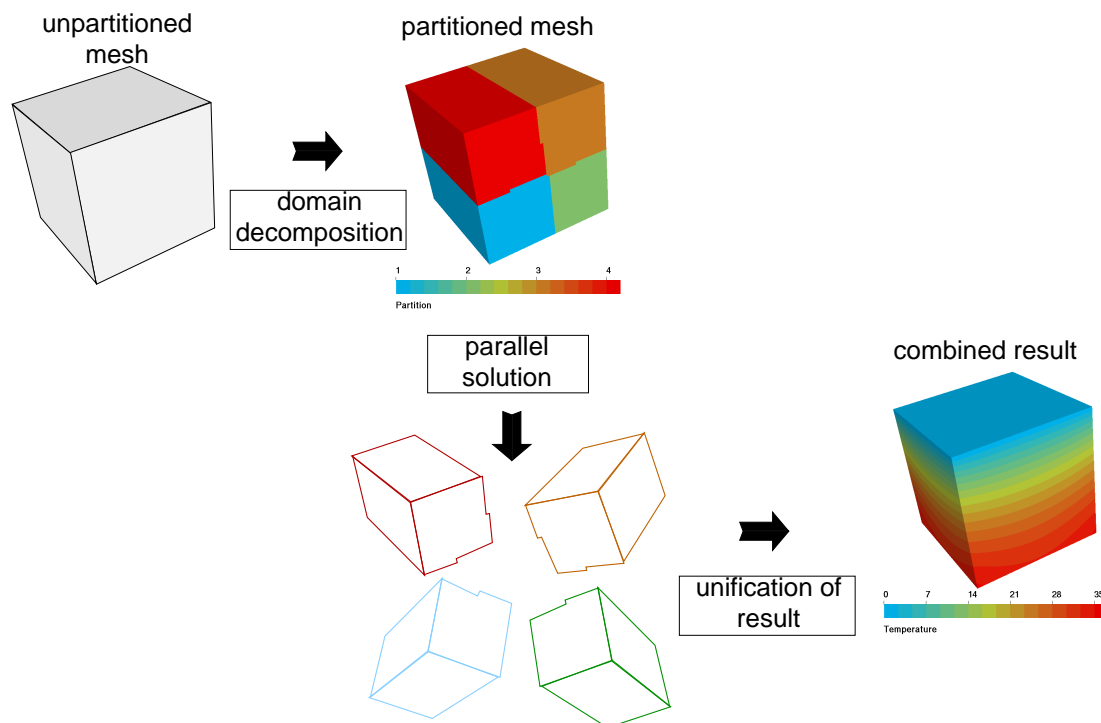


Figure 11.1: The principle steps to be taken for a parallel run of Elmer

sition for distributing the load to multiple processes that are being run on either different cores or CPUs. To that end, the initial mesh has to be split into parts that – with respect to the applied models – lead to similar loads of the processors<sup>1</sup>. This will be discussed in section 11.2.

The solver stage mostly will demand from serial runs differing numerical techniques, as solution strategies have to take care of the by the domain boundaries limited possibilities of memory access. In general, convergence of linear systems are more difficult to achieve compared to serial runs. These issues will be addressed in section 11.3.1.

Finally, as also the output of the parallel runs is split into domains, the post-processing usually demands an additional step of unifying the split results. Alternatively, new visualization software is capable to do that either on the fly or to also visualize the results using multiple processes. Especially the latter method inevitably will gain importance with the increasing size of models that cannot be handled on a single CPU/core due to memory and computational constraints. Concepts of post-processing parallel results are discussed in section 11.4.

## 11.2 Preprocessing of Parallel Runs

In order to utilize the decomposition, the mesh has to be split into the same amount of partitions,  $N$ , as there are different processes within the parallel computation. The plain and easy way is to start from a mesh for a serial run. The typical structure of a single domain mesh database is the following:

```
meshdirectoryname |
                  | -mesh.header
                  | -mesh.nodes
                  | -mesh.elements
                  | -mesh.boundary
```

The mesh consists of a header file, containing the basic information (e.g., numbers of nodes and elements), a file containing all nodes and two further files defining the bulk- and boundary-elements.

The parallel mesh consisting of 2 partitions the is written under the same directory within the sub-directory `partitioning.2`:

```
meshdirectoryname |
                  | -mesh.header
                  | -mesh.nodes
                  | -mesh.elements
                  | -mesh.boundary
                  | -partitioning.2 |
                                | -part.1.header
                                | -part.1.nodes
                                | -part.1.elements
                                | -part.1.boundary
                                | -part.1.shared
                                | -part.2.header
                                | -part.2.nodes
                                | -part.2.elements
                                | -part.2.boundary
                                | -part.2.shared
```

These files basically reflect the structure of a single domain mesh on the partition level. Additionally, a file names `part.N.shared` (with  $N$  being the partition number) is introduced. It contains – as the name suggests – information on between domains shared nodes.

<sup>1</sup>Currently Elmer is not able to perform internal load balancing.



11.2.1 Partitioning with ElmerGrid

Provided, a single domain mesh exists, the corresponding ElmerGrid command to create a with respect to the x-direction split mesh (in our case  $2 \times 1 \times 1 = 2$  partitions) would read as

```
ElmerGrid 2 2 meshdirectoryname -partition 2 1 1 0
```

There are different methods of partitioning built into ElmerGrid. they are summarized in table 11.1

option	purpose	parameters
-partition $N_x$ $N_y$ $N_z$ $F$	partition with respect to directions	$N_{x/y/z}$ ... number of partitions in x/y/z-direction, $F = 0$ ... element-wise partitioning, 1 ... node-wise partitioning
-partorder $n_x$ $n_y$ $n_z$	(optional in additional to previous) direction of ordering	$n_{x/y/z}$ ... components of normal vector of ordering
-metis $N$ $M$	uses metis library for partitioning	$N$ ... number of partitions, $M$ ... method  $M=0$ ... PartMeshNodal $M=1$ ... PartMeshDual $M=2$ ... PartGraphRecursive $M=3$ ... PartGraphKway $M=4$ ... PartGraphVKway

Table 11.1: Partition methods for ElmerGrid

Depending on what partitioning method was used, additional parameters may be used for adaption of mesh specifications Those parameters and their purpose are listed in 11.2

option	purpose	parameters
-halo	create halo for the partitioning	
-indirect	create indirect connections in the partitioning	
-periodic $F_x$ $F_y$ $F_z$	declare the periodic coordinate directions for parallel meshes and sets periodic points into same partitions	$F_{x,y,z} = 1$ ...periodic, 0 ...not periodic
-partoptim	apply aggressive optimization to node sharing	
-partbw	minimize the bandwidth of partition-partition couplings	
-parthypre	hypr type numbering (number the nodes continuously partition-wise)	

Table 11.2: Additional mesh generation options for ElmerGrid

Figure 11.2 shows the different distribution of partitions obtained with two different methods. In gen-

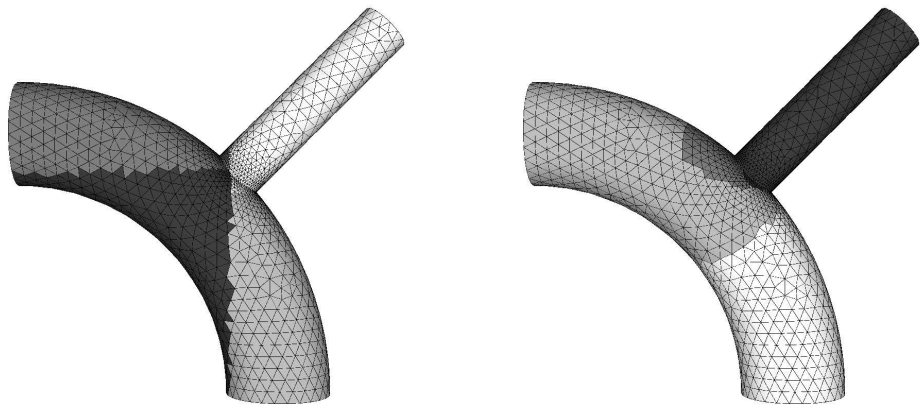


Figure 11.2: Distribution of four partitions using the options `-partition 2 2 1` (left) and `-metis 4 1` (right). It comes clear that the partitioning to the left contains more partition-partition boundaries and consequently will perform worse in a parallel run

eral, the user should utilize the `metis` options, if more complex geometries (like in Fig. 11.2) are to be decomposed. This ensures that the number of shared nodes and consequently also the amount of inter-process communication during the parallel computation is minimized. More simple objects, especially those using regular meshes, can be split according to the axis using the `partition` option without having to compromise on communication speed.

### Halo Elements

One of the additional options displayed in Tab. 11.2 are so called halo elements. As displayed in Fig. 11.3, halo-elements are additional elements that do not belong to the partition (i.e., they are not contributing in the domain-wise solution procedure), but rather are replicas of the neighbor elements of adjoining partitions. Thus, in a parallel run, the values of variables as well as the geometry of the whole element are at disposition withing the domain partition. These may be needed by a specific FE method, such as the Discontinuous

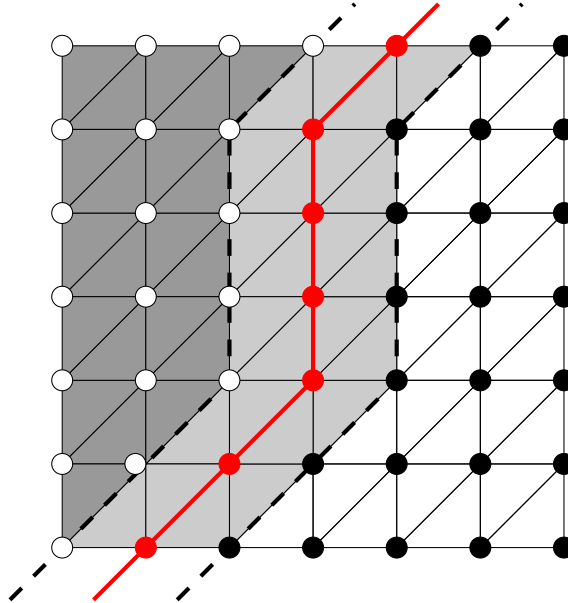


Figure 11.3: The concept of halo-elements. Each partition contains information on the neighbor elements along the domain boundary (red) of the adjoining partitions thus leading to a redundant stripe of elements (light-gray) that is shared between the domains

Galerkin method or by specific solvers/functions that need additional geometric information from the other domain (e.g., element-averaged surface normals).

## 11.3 Parallel Computations in Elmer

As mentioned before, Elmer utilizes Message Passing Interface (MPI) for inter-process communication while doing a parallel computation. To that end, a special parallel executable that is linked to a MPI library (the minimum requirement). The compilation process for the MPI version is shortly explained in chapter 12 of this guide. The executable file of the parallel version of Elmer has a to the serial call different name, `ElmerSolver_mpi`. Typically it is executed as an argument to an additional call that is specific to the parallel (MPI) environment of the platform. For instance, in a typical MPI installation (OpenMPI, MPICH) the command

```
mpirun -np 4 ElmerSolver_mpi
```

will run a four-process parallel Elmer run. The typical screen-output upon launching `ElmerSolver_mpi` indicating the number of processes is

```
ELMER SOLVER (v 5.5.0) STARTED AT: 2009/09/09 10:28:28
ELMER SOLVER (v 5.5.0) STARTED AT: 2009/09/09 10:28:28
ELMER SOLVER (v 5.5.0) STARTED AT: 2009/09/09 10:28:28
ELMER SOLVER (v 5.5.0) STARTED AT: 2009/09/09 10:28:28
ParCommInit: Initialize #PES: 4
```

```

MAIN:
MAIN: =====
MAIN:  E L M E R  S O L V E R  S T A R T I N G
MAIN:  Library version: 5.5.0 (Rev: 4195)
MAIN:  Running in parallel using 4 tasks.
MAIN:  HYPRE library linked in.
MAIN:  MUMPS library linked in.
MAIN: =====
MAIN:
MAIN:

```

It is – unlike in the serial version of Elmer – not possible to explicitly add the Solver Input File (SIF, suffix `*.sif`) as an argument to the calling command. The user rather has to provide a file called `ELMERSOLVER_STARTINFO` containing the file name. Additionally, the in the SIF declared mesh-directory has to contain a mesh with – in this specific case – four partitions.

### 11.3.1 Numerical Strategies in Parallel

The concept of domain decomposition means that ElmerSolver is run on  $N > 1$  separate parts of a domain that are interlinked at the boundaries. If no special solvers (see later in this section) are utilized, this inherently means that iterative methods have to be used in order to achieve convergence for the linear(ized) system solution procedure. The selection of available iterative methods, which all fall within Krylov subspace methods, is to be found in section 4.3. These methods in general have similar convergence compared to a single process run. The biggest difference introduced by domain decomposition is, that preconditioning strategies are altered. To give an example: As only applied to the local matrix, the LU factorization of a parallel run in comparison to a serial drops the gray zones indicated in Fig. 11.4. This not necessarily will,

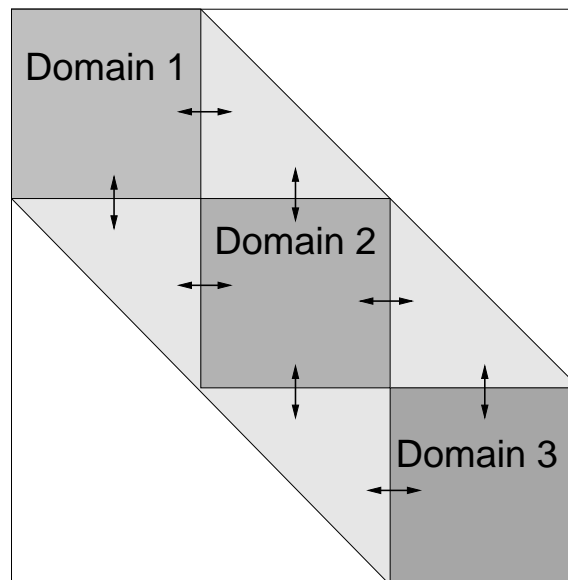


Figure 11.4: Difference of ILU factorization between serial and domain decomposition runs. If the factorization is applied only locally within the domain, contributions from the light-gray zones are not accounted for in the latter

but can negatively affect the convergence of the iterative method.

## Hypre

Hypre is a library for solving large, sparse linear systems of equations on massively parallel computers. Hypre was developed at the Center for Applied Scientific Computing (CASC) at Lawrence Livermore National Laboratory. Hypre is distributed under the GNU Lesser General Public License and thus not included in the Elmer distribution. It rather has to be downloaded, compiled and linked together with the Elmer sources.

The principle keyword for utilizing Hypre is given in the solver section

```
Linear System Use Hypre Logical
    if set to True, Hypre will be used to solve the linear system.
```

In Elmer, the only Krylov sub-space method being implemented is the Conjugate Gradient Stabilized (BiCGStab) method, which is taken into use by

```
Linear System Solver = "Iterative"
Linear System Iterative Method = "BiCGStab"
```

In combination with the BiCGStab method, the following preconditioner can be taken into use. If ILU method for preconditioning, the following settings have to be set in the solver section (here with ILU fill-in level 1):

```
Linear System Preconditioning String "ILUN"
    with  $N$  being the fill-in level (just in the built-in Elmer preconditioner). The only significant difference to Elmer's built-in ILU preconditioner is, that in case of Hypre, the missing parts (illustrated in Fig. 11.4) are now being passed from one domain to the other. In other words, the preconditioner should behave exactly as if it would be applied in a serial, single domain run. This can improve convergence, but comes at the cost of increased inter-processor communication.
```

```
Linear System Preconditioning String "ParaSails"
    ParaSails is a sparse approximate inverse preconditioner it is preconditioner for sparse matrix systems. It has the following additional parameters
```

`ParaSails Threshold` is a Real value that determines the typical value for matrix entries being dropped. Its suggested range for direct input (positive sign) is from 0.0 to 0.1, with lower values demanding higher accuracy and consequently computing time/memory. Alternatively, if negative values are entered, they are interpreted as the fraction of nonzero elements that are being dropped (e.g., -0.9 leads to 90/

`ParaSails Filter` is a Real value that determines the typical value for matrix entries in the computed approximate inverse that are dropped. Its suggested range for direct input (positive sign) is from 0.0 to 0.05. Alternatively, if negative values are entered, they are interpreted as the fraction of nonzero elements that are being dropped (see earlier item).

`ParaSails Maxlevel` is an Integer value that determines the accuracy of the preconditioner. Usually a value of 0 or 1 is within the applicable frame

`ParaSails Symmetry` is an Integer value that determines the nature of the original matrix. the following settings are to be found from the Hypre manual:

- 0 non-symmetric and/or indefinite problem, non-symmetric preconditioner
- 1 Semi Positive Definite (SPD) problem, SPD (factored) preconditioner
- 2 non-symmetric definite problem, SPD (factored) preconditioner

A typical section for the Navier-Stokes solver being solved with BiCGStab and ParaSails could look as follows

```
Solver 1
    Equation = "Navier-Stokes"
    Optimize Bandwidth = Logical True
    Linear System Solver = "Iterative"
```

```

Linear System Iterative Method = "BiCGStab"
Linear System Max Iterations = 500
Linear System Convergence Tolerance = 1.0E-06
Linear System Abort Not Converged = True
Linear System Preconditioning = "ILU1"
Linear System Residual Output = 1
Linear System Use Hypre = Logical True
Linear System Preconditioning = "ParaSails"
ParaSails Threshold = Real -0.95
ParaSails Filter = Real -0.95
ParaSails Maxlevel = Integer 1
ParaSails Symmetry = Integer 0
Stabilization Method = Stabilized
Nonlinear System Convergence Tolerance = 1.0E-04
Nonlinear System Max Iterations = 30
Nonlinear System Newton After Iterations = 1
Nonlinear System Newton After Tolerance = 1.0E-04
Steady State Convergence Tolerance = 1.0E-03
End

```

Linear System Preconditioning String "BoomerAMG"

The multi-level procedure given by BoomerAMG can also be utilized as a preconditioner. See the following part for the particular parameters that can be passed to BoomerAMG

Additionally, the Algebraic MultiGrid (AMG) solver, BoomerAMG, can be used directly to solve the system by

```

Linear System Solver = "Iterative"
Linear System Iterative Method = "BoomerAMG"

```

The following parameters for BoomerAMG can be set

BoomerAMG Relax Type Integer

Defines the smoother on the fine grid and the up and the down cycle. Possible choices

- 0 Jacobi
- 1 Gauss-Seidel, sequential
- 2 Gauss-Seidel, interior points in parallel, boundary sequential
- 3 hybrid Gauss-Seidel or SOR, forward solve (default value)
- 4 hybrid Gauss-Seidel or SOR, backward solve
- 5 hybrid chaotic Gauss-Seidel (does not work with MPI!)
- 6 hybrid symmetric Gauss-Seidel or SSOR
- 9 Gaussian elimination (only on coarsest level)

The solver on the coarsest level is set to Gaussian elimination

BoomerAMG Coarsen Type Integer

Sets the parallel coarsening algorithm to be used. Possible options are

- 0 CLJP-coarsening (a parallel coarsening algorithm using independent sets (default))
- 1 classical Ruge-Stüben coarsening on each processor, no boundary treatment
- 3 classical Ruge-Stüben coarsening on each processor, followed by a third pass, which adds coarse points on the boundaries
- 6 Falgout coarsening (uses 1 first, followed by CLJP using the interior coarse points generated by 1 as its first independent set)
- 7 CLJP-coarsening (using a fixed random vector, for debugging purposes only)
- 8 PMIS-coarsening (a parallel coarsening algorithm using independent sets, generating lower complexities than CLJP, might also lead to slower convergence)
- 9 PMIS-coarsening (using a fixed random vector, for debugging purposes only)
- 10 HMIS-coarsening (uses one pass Ruge-Stüben on each processor independently, followed by PMIS using the interior C-points generated as its first independent set)
- 11 one-pass Ruge-Stüben coarsening on each processor, no boundary treatment

BoomerAMG Num Sweeps `Integer`

sets the number of sweeps on the finest level (default value = 1)

Boomeramg Max Levels `Integer`

sets maximum number of MG levels (default value = 25)

BoomerAMG Interpolation Type `Integer`

Sets parallel interpolation operator. Possible options are

- 0 classical modified interpolation (default)
- 1 LS interpolation (for use with GSMG)
- 2 classical modified interpolation for hyperbolic PDEs
- 3 direct interpolation (with separation of weights)
- 4 multipass interpolation
- 5 multipass interpolation (with separation of weights)
- 6 extended classical modified interpolation
- 7 extended (if no common C neighbor) classical modified interpolation
- 8 standard interpolation
- 9 standard interpolation (with separation of weights)
- 10 classical block interpolation (for use with nodal systems version only)
- 11 classical block interpolation (for use with nodal systems version only) with diagonalized diagonal blocks
- 12 FF interpolation
- 13 FF1 interpolation

BoomerAMG Smooth Type `Integer`

For the use of more complex smoothers. possible options are

- 6 Schwarz smoothers (default and recommended)
- 7 Pilut
- 8 ParaSails
- 9 Euclid

BoomerAMG Cycle Type `Integer`

For a V-cycle (default) give the value 1 for a W-cycle 2

```
BoomerAMG Num Functions Integer
    has to be equal to the value given in Variable DOFs
```

Usually, the default values deliver a good performance and should hence be used as a reference constellation. Mind also, that BoomerAMG would have more (partly obsolete) option that have not directly been made accessible through its Elmer interface.

## MUMPS

The only implementation of a direct solver in the parallel version of Elmer is MUMPS (<http://mumps.enseeiht.fr/>), a sparse matrix multi-frontal parallel direct solver. MUMPS is not licensed under the GNU license terms and hence is not able to be distributed together with the Elmer sources or binaries, but has to be downloaded by the user. How MUMPS is integrated into Elmer is explained in chapter 12.

There are certain limits what comes to memory consumption, as for the time being the analysis phase is done on a master process. As a rule of thumb, about 100k Elements distributed on a quad core machine with 2 Gb of memory per process still works, but does not work fast.

MUMPS is invoked by choosing `Linear System Solver = Direct` in combination with `Linear System Direct Method = Mumps`. A typical call of the Navier-Stokes solver reads like:

```
Solver 1
Equation = "Navier-Stokes"
Optimize Bandwidth = Logical True
Linear System Solver = Direct
Linear System Direct Method = Mumps
Linear System Convergence Tolerance = 1.0E-06
Steady State Convergence Tolerance = 1.0E-03
Stabilization Method = Stabilized
Nonlinear System Convergence Tolerance = 1.0E-03
Nonlinear System Max Iterations = 1
Nonlinear System Newton After Iterations = 1
Nonlinear System Newton After Tolerance = 1.0E-03
End
```

Mind, that MUMPS will not work in serial runs. There the UMFPack library should be applied in order to utilize the same method.

## 11.4 Post-processing of Parallel Runs

During a parallel run of Elmer the results are also written in parallel. That means, a run with  $N > 1$  partitions/processes produces  $N > 1$  output files. If the base name of the output file is `parallelrun`, given in the SIF as

```
Post File = "parallelrun.ep"
```

the results of a  $N = 4$  parallel run will be written into the mesh-directory as

```
parallelrun.ep.0
parallelrun.ep.1
parallelrun.ep.2
parallelrun.ep.3
```

These files contain the results of each domain (starting with zero) for ElmerPost. Similar, if the result file base name is given as

```
Post File = "parallelrun.result"
```

the results of a  $N = 4$  parallel run will be written into the mesh-directory as



```
parallelrun.result.0  
parallelrun.result.1  
parallelrun.result.2  
parallelrun.result.3
```

From these files, a new Elmer run (on the same partitioned mesh) can be restarted.

#### 11.4.1 Combination of Results with ElmerGrid

The traditional way of post-processing Elmer results is to view them using ElmerPost. It is possible to directly load one of the domain ElmerPost output files into ElmerPost, viewing only the part of the mesh corresponding to the part of the domain decomposition. Usually, the user wants to combine those splitted results into a single. With the results as displayed above, the correct ElmerGrid command to achieve that results is

```
ElmerGrid 15 3 parallelrun
```

This will go through all timesteps (transient) or steady state levels (steady state) of all partitions and add them to the file `parallelrun.ep` (default output name can be changed using the `-out` option). If lesser timesteps/steady-state levels have been needed for convergence of the run, ElmerGrid still would try to add the maximum given number, thus filling in zeros into the combined file. This can be avoided by giving the additional option `-saveinterval first last interval`. For instance, if the user knows that the run has converged at steady-state level number 8, and is just interested to combine the converged result the command

```
ElmerGrid 15 3 parallelrun -saveinterval 8 8 1
```

executed in the mesh-directory would deliver the result. ElmerGrid assumes that all partitions in the directory have to be unified into the single output file. If for instance a run of 4 partitions has been run with the same output name after a run with 6 partitions, the files `parallelrun.ep.4` and `parallelrun.ep.5` would still reside in the mesh directory, but should not be added. This can be achieved by the additional option `-partjoin 4`. This is also useful if only some parts of the full result should be included.

#### 11.4.2 User Defined Functions and Subroutines in Parallel

In principle, the user does not have to distinguish between a user defined function/solver in parallel and serial runs. Communication between processes is being taken care of within the built-in Elmer routines, such that the single solver does not really "see" anything from the parallel environment it is running on. In special cases a few lines of code might be necessary to deal with differences imposed by parallel runs. Those are explained in section 13.4.3.

# Chapter 12

## Compilation and Linking

### 12.1 Compiling the whole package

For complete up-to-date compilation instructions look at the Elmer web pages at <http://www.csc.fielmer>.

Elmer distribution comes in several different modules. Each of these may be compiled using the configure script followed by a make command. Below is a possible compilation strategy in the Unix system.

```
#!/bin/sh -f
# replace these with your compilers:
export CC=gcc
export CXX=g++
export FC=g95
export F77=g95

modules="matc umfpack mathlibs elmergrid meshgen2d eio hutiter fem"
for m in $modules; do
    cd $m ; ./configure --prefix=/opt/elmer && make && make install && cd ..
done
```

#### 12.1.1 MPI version

In order to compile a parallel version of Elmer, one has to include the MPI library. Usually, it is enough to add the switches `-with-mpi=yes` and `-with-mpi-dir=/path/to/mpi-installation` to the configure command. More specifically, paths directly pointing to the include-file directory and the directory containing the MPI libraries themselves can be set using the switches `-with-mpi-inc-dir` and `-with-mpi-lib-dir`. As most MPI implementations contain wrapper scripts for C,C++ (`mpicc`, `mpic++`) as well as Fortran (`mpif90`, `mpif77`) compilers, the compiler environment variables can be set accordingly. A compilation script for the MPI version thus could look like this

```
#!/bin/sh -f
export CC=mpicc
export CXX=mpic++
export FC=mpif90
export F77=mpif77
# change that to your MPI installation path
export MPIDIR="/opt/openmpi"

modules="matc umfpack mathlibs elmergrid meshgen2d eio hutiter fem"
for m in $modules; do
    cd $m ; ./configure --with-mpi=yes --with-mpi-dir="$MPIDIR" \
        --with-mpi-lib-dir="$MPIDIR/lib" --with-mpi-inc-dir="$MPIDIR/include" \
```

```
--prefix=/opt/elmer && make && make install && cd ..  
done
```

## 12.2 Compiling a user defined subroutine

The `elmerf90` command is provided to help compiling your own solvers, it is a wrapper script to the compiler that was used to compile the elmer that is in the `PATH`.

```
elmerf90 -o MySolver MySolver.f90
```

In the MinGW system in Windows the suffix `.dll` should preferably be used

```
elmerf90 -o MySolver.dll MySolver.f90
```

After successful compilation, the file `mysolver.dll` is to be found in the local directory. In the filename declaration of the `Procedure`-keyword in solver input file, the suffix `.dll` can be omitted

```
Solver 1  
  Procedure = "mysolver" "subroutineName"  
  ...  
End
```

# Chapter 13

## Basic Programming

### 13.1 Introduction

The Elmer distribution contains a large set of different solvers and also the possibility to declare dependence of material properties or boundary conditions on certain variables (e.g., using the MATC language). Nevertheless, there always may occur certain physical problems that are too difficult to be handled via the solver input file. Such problems can be coped by introducing new user functions or even complete new solvers. Elmer is very flexible if certain models have to be added by the user providing her/his own code.

This chapter shall provide a brief introduction to basic programming of user functions as well as solvers that can be added to Elmer. This will be done by mainly using certain examples and explaining the programming steps occurring in these.

The Elmer Solver source is written in the programming language Fortran 90. Since the Elmer Solver binaries are compiled as shared objects, it is sufficient to just newly compile the code contributed by the user as an executable of a shared object (`.so` in UNIX and `.dll` in Windows) that dynamically is linked to the rest of the distribution. In order to provide Elmer with the needed information to be able to load an external function or solver, the following entry in the solver input file (suffix `.sif`) has to be given:

```
Procedure "filename" "procedure"
```

Where the file `filename` is the above mentioned executable that should contain the Fortran 90 subroutine or function `procedure`. The file `filename` should reside in the same directory where the solver input file is. Else, the relative or absolute path to that file should be added in front of the entry `filename`.

### 13.2 Basic Elmer Functions and Structures

In order to provide a better understanding for the following mainly example-based explanation some of the most often needed functions and routines provided by Elmer shall be discussed in this section. Most of these routines and functions are defined in the Fortran 90 module `DefUtils`. It has to be included in the code provided by the user giving the keyword

```
USE DefUtils
```

It is important to notice that – due to the nature of the Finite Element Method – the basic data structure in the Elmer Solver is the single element, rather than single points. That simplifies data manipulation in solver subroutines, but makes things a little bit more difficult if dealing with the coding of pointwise defined boundary and initial condition as well as body forces and parameter functions. In the Elmer Solver the type `Element_t` contains information on elements.

### 13.2.1 How to Read Values from the Input File

In the Elmer Solver the entries of each section of the solver input file – such as material, body force and initial condition – are accessed via pointer of the defined data type `ValueList_t`, further referred to as “list”. A list provides access to all the information that has been passed to the Elmer Solver from the solver input files, related to the specific section.

The principal connection between the solver input file and the access from a user function is depicted in Fig. 13.1

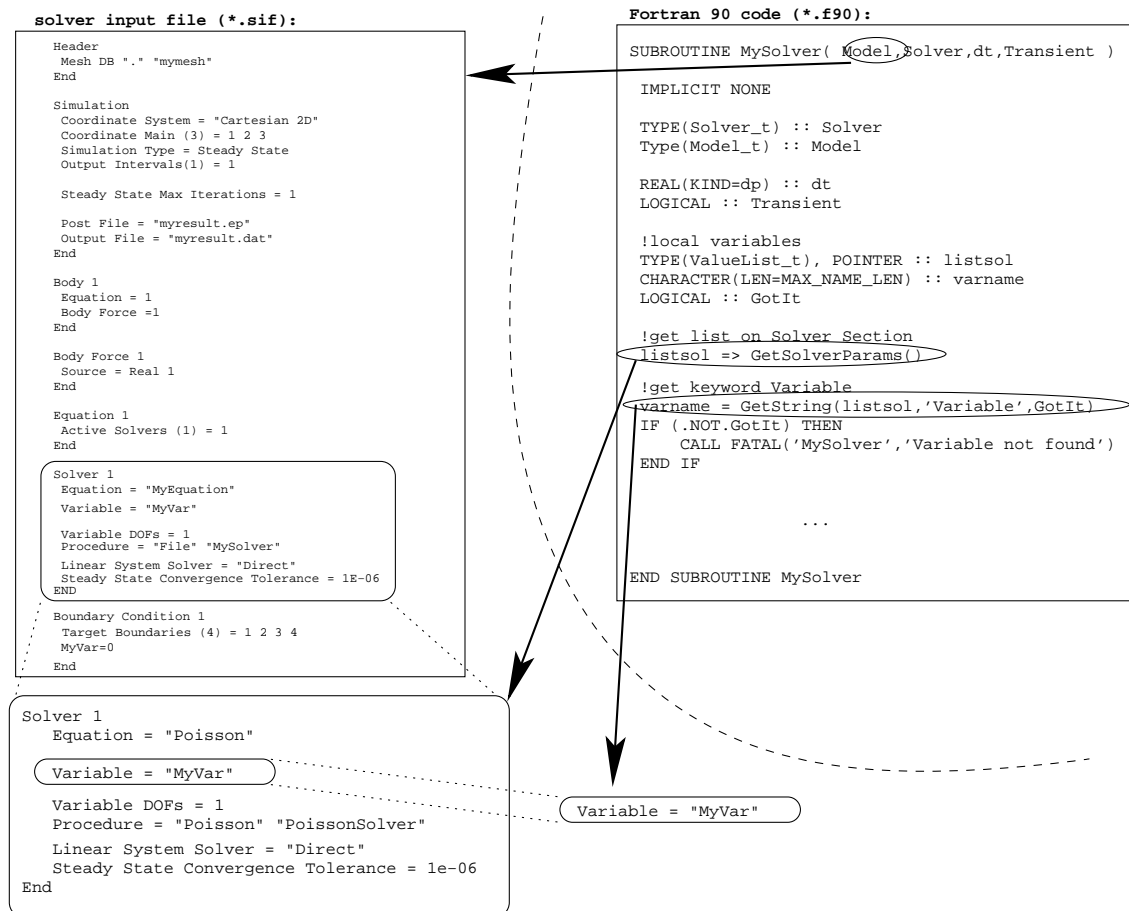


Figure 13.1: Scheme of the access of structures in the solver input file from a Fortran 90 user subroutine. The example shows, how a string is read in from the Solver section.

#### How to Access Different Sections

The following table shows the definition of the functions defined in the module `DefUtils` to provide the correct list for parameters and constants concerning the simulation and solvers

function	corresponding section
<code>GetSimulation()</code>	Simulation
<code>GetConstants()</code>	Constants
<code>GetSolverParams()</code>	Solver 1,...

For instance, the following source code lines provide access to the entries in the simulation section of the solver input file

```
! variable declaration for pointer on list
TYPE(ValueList_t), POINTER :: Simulation
...
! assign pointer to list
Simulation => GetSimulation()
...
```

Lists that provide information connected to a certain element are

function	corresponding section
GetMaterial( Element, Found )	Material 1,...
GetBodyForce( Element, Found )	Bodyforce 1,...
GetEquation( Element, Found )	Equation 1,...
GetBC( UElement )	Boundary Condition 1,...

In the first three of these functions shown above the optional variable `Found` of type `LOGICAL` is set to `.TRUE.` upon successful search in the solver input file. Hence, it can be used for error handling. The arguments `Element` and `UElement` are of type `Element_t`. If writing a solver, the current element is known and hence can directly be passed to the functions listed above. Else, this argument may also be omitted. However, Elmer Solver needs to have the information upon the element in order to inquire the number of the material/bodyforce/equation/boundary condition section from the solver input file. Hence, if this function argument is dropped, Elmer Solver falls back to the structure `CurrentModel % CurrentElement`, which by the active solver has to be assigned to the address of the current element (see section 13.4).

The functions for input of different values from the solver input file need the assigned pointer to the corresponding to the specific section.

### Reading Constants from the Solver Input File

The following value types are defined for the solver input file:

Value in Input File	Variable in Elmer Solver
Real	Real (KIND=dp)
Integer	INTEGER
Logical	LOGICAL
String	CHARACTER (LEN=MAX_NAME_LEN)
File	CHARACTER (LEN=*)

The defined interface of such a function is

```
FUNCTION FunctionName( List, Name, Found ) Result(x)
  TYPE(ValueList_t), POINTER :: List
  CHARACTER(LEN=*) :: Name
  LOGICAL, OPTIONAL :: Found
```

The arguments have the following purpose

List	List from which the value has to be read. This pointer has to be obtained by one of the previously introduced functions
Name	The keyword in the particular section for the value
Found	Optional boolean variable that contains the value <code>.TRUE.</code> upon successful read in

The type of the returned of value, `x`, is depending on the function. The following functions are declared in the `DefUtils` module:

- A value of type `REAL` is read in using the function

```

REAL(KIND=dp) :: r
...
r = GetConstReal( List, Name, Found )

```

- A variable of type INTEGER is read in using the function

```

INTEGER :: i
...
i = GetInteger( List, Name, Found )

```

- A string is read into a user function or solver by the following code line

```

CHARACTER(LEN=MAX_NAME_LEN) :: str
...
str = GetString( List, Name, Found )

```

It is important to note that these routines are only meant for reading in constant values. Consequently, these values must not be dependent on other variables.

### Reading Mesh-values from the Solver Input File

The previously introduced function `GetConstReal` is defined for reading in a constant value of type `REAL(KIND=dp)`. In the case if values have to be obtained for nodes of an element defined on the mesh (e.g., an initial condition, a boundary condition or a material parameter), the following function has to be used

```

FUNCTION GetReal( List, Name, Found, UElement ) RESULT(x)
  TYPE(ValueList_t), POINTER :: List
  CHARACTER(LEN=*) :: Name
  LOGICAL, OPTIONAL :: Found
  TYPE(Element_t), OPTIONAL, TARGET :: UElement
  REAL(KIND=dp) :: x(CurrentModel % CurrentElement % Type % NumberOfNodes)

```

The returned value, `x`, is a one-dimensional array of type `REAL(KIND=dp)` with entries for every node of the either given element `UElement` or alternatively the default structure `CurrentModel % CurrentElement`. For instance, reading in the material parameter `Viscosity` from an already assigned pointer of type `ValueList_t` for a given element, `Element`, is done by the following code lines

```

REAL(KIND=dp), ALLOCATABLE :: viscosity(:)
INTEGER :: NoNodes
TYPE(ValueList_t), POINTER :: Material
TYPE(Element_t), POINTER :: Element
LOGICAL :: Found
...
allocate viscosity, set pointers Material and Element
...
NoNodes = GetElementNOFNodes(Element)
...
viscosity(1:NoNodes) = GetReal(Material, 'Viscosity', Found, Element)

```

The user has to make sure that the array that later contains the nodal values is of sufficient size. This, for instance, can be guaranteed by allocating it to the maximal occurring number of nodes for an element in the model

```

ALLOCATE(viscosity(CurrentModel % MaxElementNodes))

```

### Physical Time as Argument of User Function

If a user function needs physical time as an input, it can be passed as an argument. For instance, if a boundary condition for the normal component of the velocity would have the physical time as the input variable, the function call in the solver input file then would look as follows (see section 13.3 for more details on user functions)

```
Boundary Condition BCNo
  Name = "time_dependent_outlet"
  Target Boundaries = BoundaryNo
  Normal-Tangential Velocity = True
  Velocity 2 = 0.0
  Velocity 1
    Variable Time
    Real Procedure "executable" "timeOutletCondition"
  End
End
```

Here the entries *BCNo* and *BoundaryNo* have to be replaced by the correct boundary condition and boundary target number. The file *executable* should contain the compiled user function *timeOutletCondition*.

### 13.2.2 How to Communicate with Structures Inside Elmer Solver

Often it is necessary to get information from inside the Elmer Solver, such as mesh coordinates or field variables associated to another solver procedure. If writing a solver subroutine, all information of that kind is accessible via the type `TYPE(Solver_t) :: Solver`. In the case of a user function (boundary condition, initial condition, material parameter), the default structure `CurrentModel % Solver` has to be used.

#### Inquiring Information on the Element

As mentioned earlier, most of the pre-defined functions and subroutines inside Elmer Solver apply on the whole element rather than on single nodes. Information on elements can be accessed via the pre-defined type `Element_t`. We list the functions/subroutines for the mostly needed purposes:

- Setting the active element (bulk):

```
TYPE(Element_t), POINTER :: Element
Type(Solver_t), Target :: Solver
INTEGER :: ElementNumber
...
Element => GetActiveElement(ElementNumber)
```

The argument `Solver` is optional. If it is not given, `CurrentModel % Solver` is used. This function also automatically sets the pointer `CurrentModel % CurrentElement` to the element with the given element number `ElementNumber`. This is important if sub-sequentially called functions rely on this default value to be set.

The total number of active bulk elements for a specific solver is to be inquired using the value `Solver % NumberOfActiveElements`.

- Setting the active element (boundary):

```
TYPE(Element_t), POINTER :: BoundaryElement
INTEGER :: ElementNumber
...
BoundaryElement => GetBoundaryElement(ElementNumber)
```



This routine also sets the structure `CurrentModel % CurrentElement` to the boundary element.

In contrary to the domain (i.e., bulk) it is a priori not known which boundary element is part of a boundary condition of a specific solver. This information may be obtained using the function

```
Type(Element_) :: BoundaryElement
LOGICAL :: IsActiveBoundary
...
IsActiveBoundary = BoundaryElement(BoundaryElement, Solver)
```

where both arguments are optional. If they are omitted, Elmer Solver takes the values `CurrentModel % CurrentElement` and `CurrentModel % Solver`, respectively. The boundary element number, `ElementNumber` may vary between 1 and the maximum value

```
Solver % Mesh % NumberOfBoundaryElements
```

- Inquire number of nodes in an element:

```
INTEGER :: N
TYPE(Element_t) :: Element
...
N = GetElementNOFNodes( Element )
```

The argument `Element` is optional. The default value is `CurrentModel % CurrentElement`

- Get nodal coordinates for element:

```
TYPE(Nodes_t) :: ElementNodes
TYPE(Element_t) :: Element
TYPE(Solver_t) :: Solver
...
CALL GetElementNodes( ElementNodes, Element, Solver )
```

The arguments `Element` and `Solver` are optional. The default values are `CurrentModel % CurrentElement` and `CurrentModel % Solver`, respectively. The argument `ElementNodes` is of the pre-defined type `Nodes_t`. The different components of the coordinates for the *i*-th node can be accessed by

```
REAL(KIND=dp) :: Xcoord, Ycoord, Zcoord
...
Xcoord = ElementNodes % x(i)
Ycoord = ElementNodes % y(i)
Zcoord = ElementNodes % z(i)
```

They correspond to the axes of the defined coordinate system in the solver input file.

- Get local coordinates of the *i*-th node for assigned element:

```
REAL(KIND=dp) :: U, V, W
TYPE(Element_t), POINTER :: Element
INTEGER :: i
...
U = Element % Type % NodeU(i)
V = Element % Type % NodeV(i)
W = Element % Type % NodeW(i)
```

Local coordinates are corresponding to the position inside the prototype element that is used inside the Elmer Solver. They are important if parameter values have to be obtained by summation over the basis functions.

- Get normal vector at the *i*-th node of the assigned boundary element:

```
REAL(KIND=dp) :: U, V, Normal(3)
TYPE(Element_t), POINTER :: BoundaryElement
LOGICAL :: CheckDirection
...
U = BoundaryElement % Type % NodeU(i)
V = BoundaryElement % Type % NodeV(i)
Normal = NormalVector( BoundaryElement, Nodes, U, V, CheckDirection )
```

The function needs the boundary element as well as the local coordinates of the point, where the surface (edge) normal shall be evaluated. The optional last argument, *CheckDirection*, is a boolean variable. If set to *.TRUE.*, the direction of the normal is set correctly to the rules given in section 13.3.2. The surface normal is returned in model coordinates and is of unity length.

### Inquiring Nodal Values of Field Variables

Nodal values for an element of a scalar variables are read by the subroutine

```
SUBROUTINE GetScalarLocalSolution( x,name,UElement,USolver )
  REAL(KIND=dp) :: x(:)
  CHARACTER(LEN=*) , OPTIONAL :: name
  TYPE(Solver_t) , OPTIONAL, TARGET :: USolver
  TYPE(Element_t), OPTIONAL, TARGET :: UElement
```

The returned value is an array containing the nodal values of the variable *name*. If this variable name is not provided, it is assumed that the corresponding solver *USolver* has only one variable with a single degree of freedom. If the optional parameters *USolver* and *UElement* are not provided, then the default values *CurrentModel % Solver* and *CurrentModel % CurrentElement*, respectively, are used.

For instance, the following code lines read in the nodal element values for the variable *Temperature* (from the heat solver)

```
REAL(KIND=dp), ALLOCATABLE :: localTemp(:)
ALLOCATE(localTemp(CurrentModel % MaxElementNodes))
...
CALL GetScalarLocalSolution(localTemp, 'Temperature')
```

In the case of a vector field variable, the analog function *GetVectorLocalSolution* has to be used. For instance, if the user wants to read in the local velocity of an deforming mesh (from the *MeshSolver*), the following syntax has to be applied

```
REAL(KIND=dp) , ALLOCATABLE :: localMeshVelocity(:, :)
ALLOCATE(localMeshVelocity(3, Solver % Mesh % MaxElementNodes))
...
CALL GetVectorLocalSolution( MeshVelocity, 'Mesh Velocity')
```

### Inquiring Values of Field Variables for the Whole Mesh

Sometimes, the user also would like to have values for a field variable of the complete domain accessible. This is done by assigning a pointer to the variable using the function *VariableGet*

```
VariablePointer => VariableGet(Solver % Mesh % Variables, 'Variable' )
```

The argument *Variable* has to be replaced by the variable name. The returned pointer is of type *Variable\_t*. This type contains the following components

component	purpose
INTEGER, POINTER :: Perm(:)	Contains permutations for the variable. Since Elmer Solver tries to optimize the matrix structure, the numbering of the nodal values of the variable usually does not coincide with the numbering of the mesh-nodes. The is used to identify the mesh-node for a variable-entry. Hence, the field <code>VariablePointer % Perm(i)</code> contains the nodal number of the <i>i</i> -th value of the field variable <i>Variable</i> .
INTEGER :: DOFs	Contains the amount of vector components of the variable. DOFs is 1 in case of a scalar, 2 or 3 in case of a two- or three-dimensional vector field.
REAL(KIND=dp), POINTER :: Values(:)	contains the values of the field variable

For instance, in order to get access to the temperature field (similar as in the example above), the following code lines may be used

```

TYPE(Variable_t), POINTER :: TempVar
INTEGER, POINTER :: TempPerm(:)
REAL(KIND=dp), POINTER :: Temperature(:)
INTEGER :: ElementNo, N
REAL(KIND=dp), ALLOCATABLE :: localTemp(:)
ALLOCATE(localTemp(CurrentModel % MaxElementNodes))
TYPE(Element_t), POINTER :: Element
...
TempVar => VariableGet( Solver % Mesh % Variables, 'Temperature' )
IF ( ASSOCIATED( TempVar ) ) THEN
  TempPerm  => TempVar % Perm
  Temperature => TempVar % Values
  !!!! stop if temperature field has not been found !!!!
ELSE IF
  CALL Fatal('MyOwnSolver', 'No variable Temperature found')
END IF
...
DO ElementNo = 1, Solver % NumberOfActiveElements
  Element => GetActiveElement(ElementNo)
  N = GetElementNOFNodes()
  NodeIndexes => Element % NodeIndexes
  localTemp(1:N) = Temperature(TempPerm(Element % NodeIndexes))
END DO

```

It is recommended to check whether the pointer to the variable has been assigned correctly. In our little example the call of the routine `Fatal` would stop the simulation run if the assessment would lead to a negative result.

### Inquiring the Current Time

In certain situations in transient simulations the physical time might be needed in a user function. In Elmer Solver the physical time is treated as a variable and hence has to be read in using the type `Variable_t`

```

TYPE(Variable_t), POINTER :: TimeVar
Real(KIND=dp) :: Time
...
TimeVar => VariableGet( Solver % Mesh % Variables, 'Time' )
Time = TimeVar % Values(1)

```

### How to Post Messages

Including PRINT or WRITE statements to stdio in numeric-codes can lead excessive output (large number of iterations and/or large model sizes) and consequently to a reduction in performance. It is recommended to use stdio-output routines provided by Elmer Solver, for which to a certain extend the amount of output can be controlled via the solver input file. The three pre-defined subroutines for output of messages are:

- Info is used for displaying messages (e.g., upon convergence) on the screen. The syntax is

```
CALL Info('FunctionName','The displayed message', level=levelnumber)
```

The first string shall indicate which function the displayed message comes from. The second entry is a string that contains the message itself. The integer value *levelnumber* indicates the importance of the message, starting from 1 (most important). The maximum level of messages being displayed can be determined in the simulation section of the solver input file

```
max output level = 3
```

- Warn is used for displaying warnings. Warnings are always displayed and should be used if conditions in the code occur that might lead to possible errors

```
CALL Warn('FunctionName','The displayed warning')
```

- Fatal is used to terminate the simulation displaying a message. Consequently, it is used in conditions in the code where a continuation of the computation is impossible

```
CALL Fatal('FunctionName','The displayed error message')
```

Of course the strings do not have to be hard-coded but can be composed during run-time, using the WRITE command. The string variable Message is provided for that purpose

```
WRITE(Message,formatstring) list, of, variables  
CALL Info('FunctionName',Message, level=3)
```

The format-string has to be set according to the list of variables.

## 13.3 Writing a User Function

User functions can be used to provide a pointwise (not element wise!) value for a certain property. They are used for setting values of material properties inside the domain and/or to set values for certain variables on boundary conditions at the domain boundary.

The defined interface for a user function looks as follows

```
FUNCTION myfunction( model, n, var ) RESULT(result)  
  USE DefUtils  
  IMPLICIT None  
  TYPE(Model_t) :: model  
  INTEGER :: n  
  REAL(KIND=dp) :: var, result  
  
  ... contents of the function  
  leading to a value for variable result ...  
  
END FUNCTION myfunction
```

The function returns the value `result`. If this is supposed to be a nodal value of a material property or a variable condition, the variable type in Elmer has to be real double precision, hence, `REAL (KIND=dp)`. The first argument passed to the function, `model`, is of the declared type `Model_t`. It is basically the interface to all information accessible at runtime, such as variable values, mesh coordinates and boundary conditions.

The second argument, `n`, is the integer number of the node for which the function - i.e., the value `result` - is evaluated. Through the last argument, `var`, a value of an input variable on which the result depends is passed to the function. In the solver input file this variable is indicated using the `Variable`-keyword. For instance (see examples later in this chapter), if the user wants to provide the function above with the result being the density which – in this particular case – depends on the temperature, the syntax looks as follows

```
Density = Variable Temperature
Procedure "filename" "myfunction"
```

Mind that there always has to be an input variable to be given using this keyword. In the case that there is no need for an input, this may occur as a dummy argument in the function.

### 13.3.1 User Functions for Domain Properties

In the following we will give an outline of the main issues concerning the preparation of a user function for a domain property. This might be of use if a material parameter (from material section of the solver input file), an initial condition (from solver input file initial condition section) or a body force (from solver input file body force section) of somewhat higher complexity has to be defined for the domain.

Some basic aspects concerning the syntax of such functions shall be explained by the following examples:

#### Example: Viscosity as a Function of Temperature

This example demonstrates the following topics:

- definition of a material property dependent on one input variable
- how to read in a value from the material section of the solver input file

We want to implement the following relation for the dynamic viscosity,  $\mu$ , of a fluid

$$\mu(T) = \mu_{293K} \exp \left[ C \cdot \left( \frac{293}{T} - 1 \right) \right] \quad (13.1)$$

where  $T$  is the temperature. The parameters  $\mu_{293K}$  (i.e., the reference viscosity at 293 Kelvin) and  $C$  have to be read into our function from the material section of the solver input file. Thus, the material section looks as follows:

```
! Material section (ethanol)
! -----
Material 1
...
Viscosity = Variable Temperature
Procedure "fluidproperties" "getViscosity"
...
Reference Viscosity = Real 1.2E-03
Parameter C = Real 5.72
...
End
```

The values  $\mu_{293K} = 1.2 \cdot 10^{-3}$  and  $C = 5.72$  are the numerical values of the parameter occurring in (13.1) for pure ethanol. The executable containing the function named `getViscosity` will be called `fluidproperties`. The header – including the variable declaration – of the function then reads as follows:

```

!-----
! material property function for ELMER:
! dynamic fluid viscosity as a function of temperature
!-----
FUNCTION getViscosity( model, n, temp ) RESULT(visc)
  ! modules needed
  USE DefUtils

  IMPLICIT None

  ! variables in function header
  TYPE(Model_t) :: model
  INTEGER :: n
  REAL(KIND=dp) :: temp, visc

  ! variables needed inside function
  REAL(KIND=dp) :: refVisc, C
  Logical :: GotIt
  TYPE(ValueList_t), POINTER :: material

```

In order to get the pointer to the correct material-list, we use the function `GetMaterial`

```

  ! get pointer on list for material
  material => GetMaterial()
  IF (.NOT. ASSOCIATED(material)) THEN
    CALL Fatal('getViscosity', 'No material found')
  END IF

```

We immediately check, whether the pointer assignment was successful. In the case of the NULL-pointer being returned, the pre-defined procedure `Fatal` will stop the simulation and `stdio` will display the the message: (getViscosity): No material-id found

The next step is to read in the numerical values for the parameter:

```

  ! read in reference viscosity
  refvisc = GetConstReal( material, 'Reference Viscosity', GotIt)
  IF(.NOT. GotIt) THEN
    CALL Fatal('getViscosity', 'Reference Viscosity not found')
  END IF

  ! read in parameter C
  C = GetConstReal( material, 'Parameter C', GotIt)
  IF(.NOT. GotIt) THEN
    CALL Fatal('getViscosity', 'Parameter C not found')
  END IF

```

The variable `GotIt` contains the state of success of the input. In the case of unsuccessful read-in (i.e., the variable `GotIt` shows the value `.FALSE.`), the simulation will be stopped by the routine `Fatal`.

Finally, after a check upon the absolute temperature being larger than zero, the viscosity is computed according to equation (13.1)

```

  ! compute viscosity
  IF (temp <= 0.0D00) THEN ! check for physical reasonable temperature
    CALL Warn('getViscosity', 'Negative absolute temperature.')
    CALL Warn('getViscosity', 'Using viscosity reference value')
    visc = refVisc(1)
  ELSE

```

```

        visc = refVisc * EXP(C *(2.93D02/temp - 1.0D00))
    END IF

```

```
END FUNCTION getViscosity
```

In the case of negative absolute temperature, the reference value will be returned. The pre-defined routine Warn will display a specific warning on stdio.

### Example: Body Force as a Function of Space

For the use as body force for the solver presented in 13.4 (i.e. heat source distribution for heat conduction equation), we want to write a function that provides a scalar in the domain as a function of space. This example demonstrates the following topics:

- definition of a scalar in the domain as function of space in two dimensions
- how to inquire the dimension of the problem

We want to implement the following two-dimensional spatial distribution for the scalar  $h$ :

$$h(x, y) = -\cos(2\pi x) \cdot \sin(2\pi y), \quad x, y \in [0, 1] \quad (13.2)$$

where  $x$  corresponds to `Coordinate 1` and  $y$  to `Coordinate 2` of the solver input file.

Since the function given in (13.2) is dependent on two input variables, the single argument that is able to be passed to the function is not sufficient. Hence it will just be used as dummy argument. Consequently, the user can provide any (existing!) variable as argument in the solver input file. The header reads as follows

```

!-----
! body force function for ELMER:
!   scalar load as function of coordinates x and y
!           -cos(2*pi*x)*sin(2*pi*y)
!-----
FUNCTION getLoad( model, n, dummyArgument ) RESULT(load)
    ! modules needed
    USE DefUtils

    IMPLICIT None

    ! variables in function header
    TYPE(Model_t) :: model
    INTEGER :: n
    REAL(KIND=dp) :: dummyArgument, load

    ! variables needed inside function
    INTEGER :: DIM
    REAL(KIND=dp) :: x, y
    Logical :: FirstVisited = .TRUE.

    ! remember these variables
    SAVE DIM, FirstVisited

```

Further we want to check whether the problem is two-dimensional and hence suitable for our function. This is done only the first time the function is called, since - hopefully - the dimension of the problem does not change during all the following calls. The function returning the problem dimension is `CoordinateSystemDimension()`

```

    ! things done only the first time the function is visited
    IF (FirstVisited) THEN

```

```

! check whether we are dealing with a 2d model
DIM = CoordinateSystemDimension()
IF (DIM /= 2) THEN
    CALL FATAL('getLoad', 'Dimension of model has to be 2d')
END IF
FirstVisited = .FALSE.
END IF

```

The next step to inquire the coordinates of the current point the function is evaluated for. The structure model contains that information

```

! get the local coordinates of the point
x = model % Nodes % x(n)
y = model % Nodes % y(n)

```

Finally, the result is computed

```

! compute load
load = -COS(2.0D00*PI*x) * SIN(2.0D00*PI*y)

```

```
END FUNCTION getLoad
```

Figure 13.2 shows the result of a simulation using the solver defined in section 13.4 together with the function `getLoad` as body force. The entry in the body force section of the solver input file reads as follows:

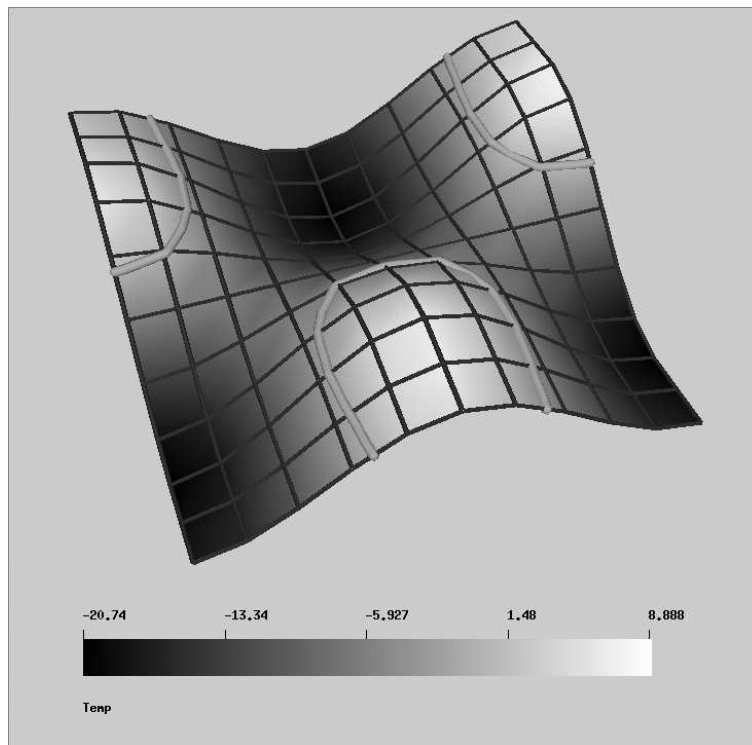


Figure 13.2: Result obtained with the routine `getLoad` as body force input for the heat conduction solver presented in 13.4. The  $z$ -coordinate is set proportional to the result obtained in the  $x$ - $y$  plane.

```

Body Force 1
Heat Source
Variable Temp      !just a dummy argument

```



```

Real Procedure "load" "getLoad"
End

```

where the shared object file has been given the name `load`. All boundaries are set to adiabatic boundary condition, i.e.,  $\nabla T \cdot \vec{n} = 0$ . This is possible if – and only if – the integral over the load vector over the whole domain balances to zero, like in our case. Since no Dirichlet condition is set, the result is not unique and contains an undetermined offset  $T_0$ .

### 13.3.2 User Functions for Boundary Conditions

As for the user functions for bulk properties presented in section 13.3.1, the function for a boundary property is evaluated pointwise. Hence, the identical function interface is used. The major difference between bulk elements and elements on boundaries are, that the latter can be associated to more than one body. That is the case on boundaries between bodies. This is important in such cases where the boundary condition is dependent on properties inside a specific body to which the boundary is attached. Possible configurations of boundaries are depicted in Fig. 13.3.

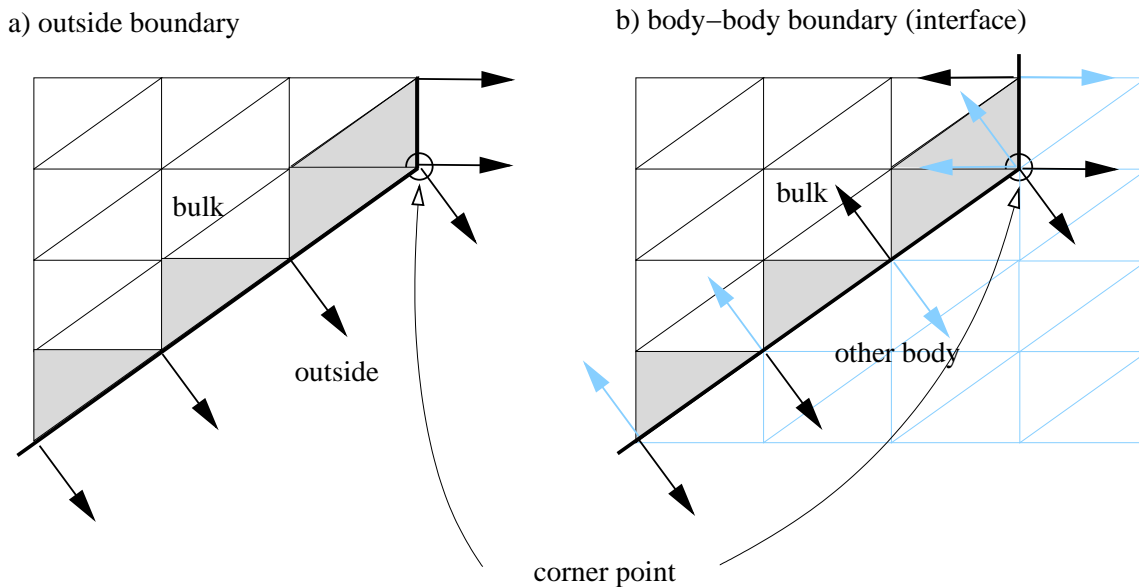


Figure 13.3: Possible constellations for boundaries and the normal vectors,  $\vec{n}$  at element nodes. Mind, that for a body-body interface (case b) the default orientation of the surface normal may vary from element to element. At boundary points that have a discontinuous first derivative of the surface (i.e. at corners and edges), the evaluation of the normal at the same point for two adjacent boundary elements leads to different surface normals. Parent elements of boundary elements for the specific body are marked as filled.

If the keyword for checking the directions in the function `NormalVector` (see section 13.2.2) is set to `.TRUE.`, the following rules apply:

- In the case of an outside boundary the surface normal,  $\vec{n}$ , is always pointing outwards of the body.
- By default on a body-body boundary, the orientation is such that the normal always is pointing towards the body with lower density,  $\rho$ , which is evaluated by comparison of the values given for the keyword `Density` in the corresponding material sections of the adjacent bodies.

In certain cases, if densities on both sides are either equal or varying functions of other variables, this may lead to a varying orientation of the surface. This effect and the effect of different directions of surface normal for the same point at surface corners and edges is depicted in Fig. 13.3. Whereas the latter effect can only be dealt with by either producing smooth surfaces or averaging surface normals, the first problem can

be overcome by providing the keyword `Normal Target Body` in the solver input file. This keyword defines the direction of the surface normals for the pre-defined subroutine `NormalVector`. For instance, the following sequence fixes the surface normal at boundary condition number 1 to point into body number 2

```
Boundary Condition 1
  Target Boundaries = 1
  Normal Target Body = Integer 2
...
End
```

### Example: Idealized Radiation Law for External Heat Transfer

As an illustrative example we want to show how to implement a very idealized radiation boundary condition for heat transfer. This example explains:

- how to identify the type of boundary according to Fig. 13.3
- how to get material parameters from domain parent elements of the boundary element
- how to identify the local node number in an element
- how to inquire boundary normals

The net flux into the body at such a boundary shall be approximated by

$$q_n = \epsilon q_{\text{ext}} - \epsilon \sigma \cdot (T^4 - T_{\text{ext}}^4), \quad (13.3a)$$

where  $T_{\text{ext}}$  is the external temperature,  $\sigma$  stands for the Stefan-Boltzmann constant and  $\epsilon$  is the emissivity. The external heat flux shall be defined as

$$q_{\text{ext}} = \begin{cases} -I \vec{s} \cdot \vec{n}, & \vec{s} \cdot \vec{n} < 0, \\ 0, & \text{else,} \end{cases} \quad (13.3b)$$

where  $I$  is the intensity and  $\vec{s}$  the direction of the incoming radiation vector. The surface normal,  $\vec{n}$ , is assumed to point outwards the body surface.

Since we are planning to use this boundary condition in connection with the solver presented in section 13.4.2, we have to provide the load vector  $l = q_n / (c_p \varrho)$  occurring in the force vector of (13.7). This means that we have to inquire the material parameters  $c_p$  and  $\varrho$  for the parent element from the material section of the adjacent body.

The header of the function reads as

```
!-----
! boundary condition function for ELMER:
! simplified radiation BC
!-----
FUNCTION simpleRadiation( model, n, temp ) RESULT(load)
  ! modules needed
  USE DefUtils

  IMPLICIT None

  ! variables in function header
  TYPE(Model_t) :: model
  INTEGER :: n
  REAL(KIND=dp) :: temp, load

  ! variables needed inside function
```

```

REAL(KIND=dp), ALLOCATABLE :: Density(:), HeatCapacity(:), ExtTemp(:)
REAL(KIND=dp), POINTER :: Work(:, :)
REAL(KIND=dp) :: radvec(3), Normal(3), NormDir, U, V, &
    Emissivity, normalabsorbtion, emission, StefanBoltzmann
INTEGER :: DIM, other_body_id, nboundary, nparent, &
    BoundaryElementNode, ParentElementNode, istat
Logical :: GotIt, FirstTime=.TRUE., Absorption = .TRUE.
TYPE(ValueList_t), POINTER :: ParentMaterial, BC
TYPE(Element_t), POINTER :: BoundaryElement, ParentElement
TYPE(Nodes_t) :: ElementNodes

SAVE FirstTime, Density, HeatCapacity, ExtTemp
!-----

```

The boundary element and the pointer to the list of the corresponding Boundary Condition-entry in the solver input file are assigned

```

! -----
! get element information
! -----
BoundaryElement => CurrentModel % CurrentElement
IF ( .NOT. ASSOCIATED(BoundaryElement) ) THEN
    CALL FATAL('simpleRadiation', 'No boundary element found')
END IF

BC => GetBC()
IF ( .NOT. ASSOCIATED(BC) ) THEN
    CALL FATAL('simpleRadiation', 'No boundary condition found')
END IF

```

Thereafter, a case distinction between the two possible constellations in Fig. 13.3 (i.e., outside or body-body boundary). A outside boundary is indicated by the value -1 of BoundaryElement % BoundaryInfo % outbody. In the case of a boundary-boundary interface the surface normal is supposed to point outwards. I.e., the body hosting the parent element is taken the one for which ParentElement % BodyId does not coincide with BoundaryElement % BoundaryInfo % outbody

```

other_body_id = BoundaryElement % BoundaryInfo % outbody
! only one body in simulation
! -----
IF (other_body_id < 1) THEN
    ParentElement => BoundaryElement % BoundaryInfo % Right
    IF ( .NOT. ASSOCIATED(ParentElement) ) &
        ParentElement => BoundaryElement % BoundaryInfo % Left
    ! we are dealing with a body-body boundary
    ! and assume that the normal is pointing outwards
    ! -----
ELSE
    ParentElement => BoundaryElement % BoundaryInfo % Right
    IF (ParentElement % BodyId == other_body_id) &
        ParentElement => BoundaryElement % BoundaryInfo % Left
END IF

! just to be on the save side, check again
! -----
IF ( .NOT. ASSOCIATED(ParentElement) ) THEN
    WRITE(Message, *) &

```

```

        'No parent element found for boundary element no. ', n
        CALL FATAL('simpleRadiation',Message)
    END IF

```

After that procedure the pointer `ParentElement` is set on the adjacent element of the boundary element inside the body for which the radiation boundary condition is evaluated.

We further need the total number of nodes in the boundary element and the parent element given by `nboundary` and `nparent`, respectively. Also the corresponding number of the boundary node number, `n`, in the parent element, `ParentElementNode`, as well as in the boundary element itself, `BoundaryElementNode`, is evaluated. At the end of this code sequence, the routine `GetElementNodes` sets the information on the nodes of the boundary element

```

    ! get the corresponding node in the elements
    ! -----
    nboundary = GetElementNOFNodes(BoundaryElement)
    DO BoundaryElementNode=1,nboundary
        IF ( n == BoundaryElement % NodeIndexes(BoundaryElementNode) ) EXIT
    END DO
    nparent = GetElementNOFNodes(ParentElement)
    DO ParentElementNode=1,nboundary
        IF ( n == ParentElement % NodeIndexes(ParentElementNode) ) EXIT
    END DO

    ! get element nodes
    ! -----
    CALL GetElementNodes(ElementNodes, BoundaryElement)

```

The needed space for reading material parameter from the parent element as well as boundary condition parameters for the boundary element is allocated. In the case of the function being re-visited, we first do a deallocation, since the values of `nboundary` or `nparent` may change from element to element (hybrid mesh)

```

! -----
! Allocations
! -----
IF (.NOT.FirstTime) THEN
    DEALLOCATE(Density, HeatCapacity, ExtTemp)
ELSE
    FirstTime = .FALSE.
END IF
ALLOCATE(Density( nparent ), HeatCapacity( nparent ),&
        ExtTemp(nboundary), stat=istat)
IF (istat /= 0) CALL FATAL('simpleRadiation', 'Allocations failed')

```

The following code lines read the values for the parameters associated with the boundary element and the Stefan-Boltzmann constant from the solver input file

```

! -----
! get parameters from constants section
! and boundary condition section
! -----
DIM = CoordinateSystemDimension()
StefanBoltzmann = ListGetConstReal( Model % Constants, &
        'Stefan Boltzmann',GotIt)
IF (.NOT. GotIt) THEN ! default value in SI units
    StefanBoltzmann = 5.6704D-08
END IF

```

```

Emissivity = GetConstReal( BC,'Emissivity',GotIt)
IF ((.NOT. GotIt) .OR. &
  ((Emissivity < 0.0d0) .OR. (Emissivity > 1.0d0))) THEN
  load = 0.0d00
  CALL WARN('simpleRadiation','No Emissivity found.')
  RETURN ! no flux without or with unphysical emissivity
END IF

ExtTemp(1:nboundary) = GetReal( BC,'External Temperature',GotIt)
IF (.NOT.GotIt) THEN
  WRITE (Message,*) 'No external temperature defined at point no. ', n
  CALL Warn('simpleRadiation', Message)
  ExtTemp(1::nboundary)= temp
END IF

Work => ListGetConstRealArray( BC,'Radiation Vector',GotIt)
IF ( GotIt ) THEN
  radvec = 0.0D00
  NormDir = SQRT(SUM(Work(1:DIM,1) * Work(1:DIM,1)))
  IF (NormDir /= 0.0d00) THEN
    radvec(1:DIM) = Work(1:DIM,1)*Work(4,1)/NormDir
  ELSE ! no radiation for weird radiation vector
    Absorption = .FALSE.
  END IF
ELSE ! no absorption without radiation vector
  Absorption = .FALSE.
END IF

```

If absorption of an incoming radiation vector has to be computed, the surface normal has to be inquired

```

! -----
! get surface normals ( if needed )
! -----
IF (Absorption) THEN
  U = BoundaryElement % Type % NodeU(BoundaryElementNode)
  V = BoundaryElement % Type % NodeV(BoundaryElementNode)
  Normal = NormalVector(BoundaryElement, ElementNodes, U, V, .TRUE.)
END IF

```

Thereafter, the needed material parameters are read from the material section of the solver input file that associated with the body for which the radiation boundary condition is computed

```

! -----
! get material parameters from parent element
! -----
ParentMaterial => GetMaterial(ParentElement)
! next line is needed, if the consequently read
! parameters are themselves user functions
! -----
CurrentModel % CurrentElement => ParentElement
Density(1:nparent) = GetReal(ParentMaterial, 'Density', GotIt)
IF (.NOT.GotIt) Density(1:nparent) = 1.0d00
HeatCapacity(1:nparent) = GetReal(ParentMaterial, 'Heat Capacity', GotIt)
IF (.NOT.GotIt) HeatCapacity(1:nparent) = 1.0d00

! put default pointer back to where it belongs

```

```
! -----
CurrentModel % CurrentElement => BoundaryElement
```

Since these material parameters themselves may be given in form of user functions, the default pointer `CurrentModel % CurrentElement` has to be set to the parent element upon call of the function `GetReal`.

Finally the two parts of the total normal heat flux are evaluated. The external load is obtained by dividing this `Laue` by the inquired values for `Density` and `HeatCapacity`.

```
!-----
! compute flux and subsequently load
!-----
IF (Absorption) THEN
    normalabsorbtion = -1.0D00 & ! since normal pointing outwards
    * Emissivity * DOT_PRODUCT(Normal,radvec)
    IF (normalabsorbtion < 0.0d0) &
        normalabsorbtion = 0.0d00
ELSE
    normalabsorbtion = 0.0d00
END IF

emission = StefanBoltzmann * Emissivity * &
    ( temp**4 - ExtTemp(BoundaryElementNode)**4) &
    / (HeatCapacity(ParentElementNode) * Density(ParentElementNode))

load = normalabsorbtion + emission

END FUNCTION simpleRadiation
```

Figure 13.4 shows the result of the heat conduction solver presented in section 13.4 in combination with the function `simpleRadiation` as boundary condition on two oppositely directed boundaries (boundary condition no. 1). Since the radiation vector is aligned with the  $x$ -direction and hence perpendicular with respect to these two boundaries, the absorption part vanishes for one of these boundaries. For the sake of simplicity, the material parameters  $\rho$ ,  $c_p$  and  $k$  have been set to unity. The corresponding entries of the solver input file for the boundary conditions of the case shown in Fig. 13.4 are:

```
Boundary Condition 1
    Target Boundaries(2) = 1 2
    Boundary Type = String "Heat Flux"
    External Load
        Variable Temp
        Real Procedure "radiation_flux.exe" "simpleRadiation"
    External Temperature = Real -20.0E00
    Radiation Vector(4) = Real -1.0E00 0.0E00 0.0E00 1.0E01
    Emissivity = Real 0.5
End

Boundary Condition 2
    Target Boundaries = 3
    Boundary Type = String "Given Temperature"
    Temp = Real 0
End

Boundary Condition 3
    Target Boundaries = 4
    Boundary Type = String "Adiabatic"
End
```

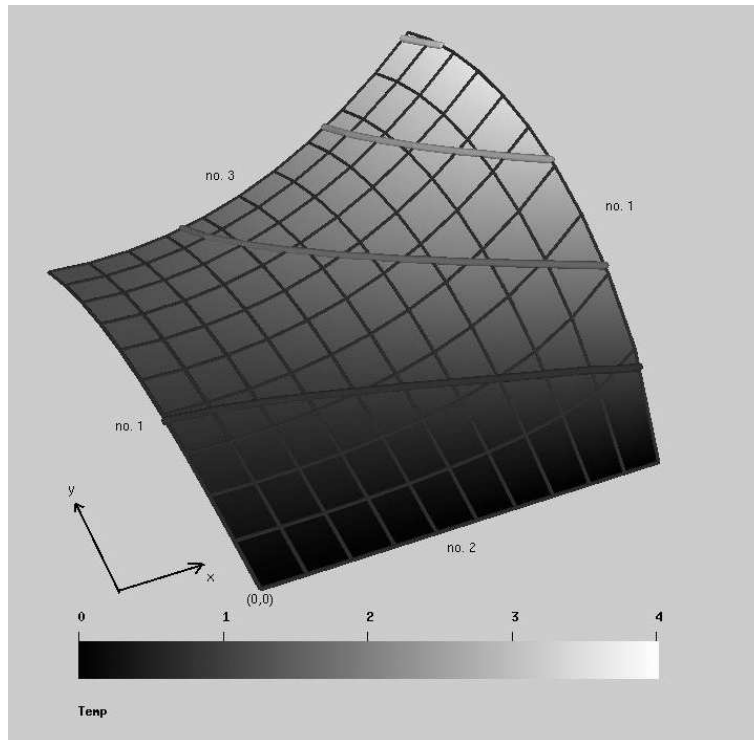


Figure 13.4: Result of the heat conduction solver applying the simplified radiation boundary condition described in this section. The coordinate directions as well as the number of the corresponding boundary condition section are shown. The latter can be compared to the solver input file entries shown in this section.

## 13.4 Writing a Solver

In Elmer an additional solver may be provided by dynamically linked subroutines. The pre-defined interface of a solver subroutine is

```
SUBROUTINE mysolver( Model,Solver,dt,TransientSimulation )
  TYPE(Model_t) :: Model
  TYPE(Solver_t) :: Solver
  REAL(KIND=dp) :: dt
  LOGICAL :: TransientSimulation
```

The first argument, `Model`, is the same structure also passed to a user function (see section 13.3). The second argument, `Solver`, is of type `Solver_t` and contains all information upon options set for this particular solver. The timestep size, `dt`, and a boolean variable, `TransientSimulation`, indicating whether the solver is to be run as a part of a transient (value `.TRUE.`) or steady state (value `.FALSE.`) simulation are further arguments of the solver subroutine.

### 13.4.1 Structure of a Solver

The well known structure of a linearized partial differential equation (PDE) for the scalar  $T$  in the variational formulation is

$$\mathbf{M}_{ij} \frac{\partial T_j}{\partial t} + \mathbf{A}_{ij} T_j = F_i, \quad (13.4)$$

with the mass matrix,  $\mathbf{M}_{ij}$ , the stiffness matrix,  $\mathbf{A}_{ij}$  and the force vector,  $F_i$ .

Time-stepping and the coupled solver iteration – i.e., the steady state or time level iteration of several solvers of the simulation – is taken care of by the main part of the Elmer Solver. The task of the user supplying a user defined solver subroutine is to linearize an eventually nonlinear PDE and to supply the Elmer Solver with the element-wise components for the matrices as well as the force vector.

This leads to a principle structure of a user defined solver subroutine as it is depicted in Fig. 13.5. We further will explain the construction of a user solver subroutine by discussing an example case.

### 13.4.2 Example: Heat Conduction Equation

In order to provide a simple example, we want to explain how the solution of the purely convective heat transport equation is implemented in Elmer. This example explains:

- reading solver parameters from the solver input file
- assembly of the local element matrix components for the domain and a Neumann condition including explanation of the most important Elmer Solver routines needed for linear system matrix assembly and solution
- how to deal with non-linear and transient PDE's
- how to implement Dirichlet boundary conditions

For constant density,  $\varrho$ , and heat capacity,  $c_p$  this equation may be written as

$$\frac{\partial T}{\partial t} - \nabla \cdot \left( \frac{k}{c_p \varrho} \nabla T \right) = \frac{h}{c_p \varrho}, \quad (13.5)$$

where  $T$  stands for the temperature,  $k$  for the heat conductivity and  $h$  is the heat source.

The variational formulation of (13.5) reads after partial integration of the conduction term and application of Green's theorem

$$\int_V \frac{\partial T}{\partial t} \gamma_i dV + \int_V \frac{k}{c_p \varrho} \nabla T \cdot \nabla \gamma_i dV = \int_V \frac{h}{c_p \varrho} \gamma_i dV + \oint_{\partial V} \frac{1}{c_p \varrho} \underbrace{(k \nabla T) \cdot \vec{n}}_{=q_n} \gamma_i dA, \quad (13.6)$$



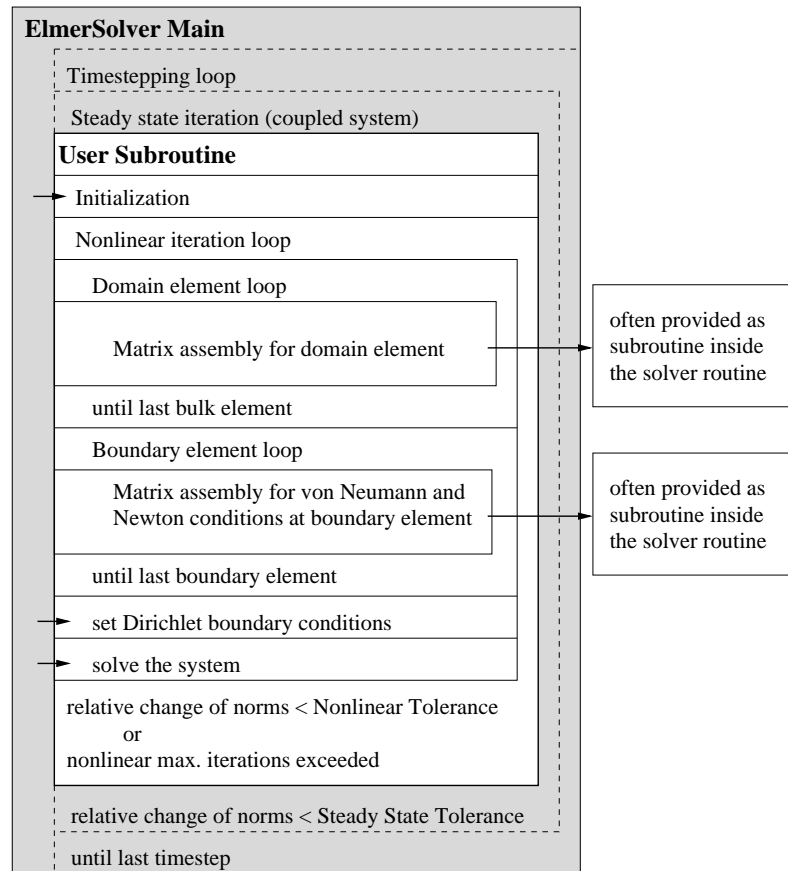


Figure 13.5: Flowchart of a user defined solver subroutine within Elmer Solver. The grey underlayed area indicates the tasks of a simulation that are provided by Elmer, whereas the white area contains the flowchart for the source code of the user subroutine. Arrows pointing into this field indicate needed subroutine/function calls to Elmer Solver.

where  $\gamma_i$  is the basis-function,  $V$  and  $\partial V$  is the element volume and its enclosing surface, respectively. The surface normal of  $\partial V$  is denoted by  $\vec{n}$ . According to the Galerkin method, the variable is given as  $T = T_j \gamma_j$ , with the sum taken over the index  $j$ . Comparing with (13.4) leads to the matrices and vectors

$$\begin{aligned} \mathbf{M}_{ij} &= \int_V \gamma_j \gamma_i dV, \\ \mathbf{A}_{ij} &= \int_V \frac{k}{c_p \varrho} \nabla \gamma_j \cdot \nabla \gamma_i dV, \\ F_i &= \int_V \frac{h}{c_p \varrho} \nabla \gamma_i dV + \oint_{\partial V} \underbrace{\frac{q_n}{c_p \varrho}}_{=l} \gamma_i dA. \end{aligned} \quad (13.7)$$

Although the external heat flux perpendicular to the surface normal,  $q_n(T)$ , in general is a function of the temperature we want to keep it formal as being prescribed. Hence, only a contribution in the force vector occurs in our formulation. Mind, that a linear or linearized expression of  $q_n(T)$  directly could give a contribution to the stiffness matrix at the entries corresponding to boundary nodes. In our approach, even in the case of a linear dependency  $q_n(T) \propto T$  we have to iterate the solution because of our treatment of the boundary condition.

The header contains the declaration needed variables – we tried to give them self explaining identifiers. Furthermore, allocations of the needed field arrays are done for the first time the subroutine is visited (checked by the boolean variable `AllocationsDone`). The variable names of these arrays then have to be included in the `SAVE`-statement at the end of the variable declaration block.

```
SUBROUTINE MyHeatSolver( Model,Solver,dt,TransientSimulation )

  USE DefUtils

  IMPLICIT NONE
!-----
  TYPE(Solver_t) :: Solver
  TYPE(Model_t) :: Model

  REAL(KIND=dp) :: dt
  LOGICAL :: TransientSimulation
!-----
! Local variables
!-----
  TYPE(Element_t),POINTER :: Element

  LOGICAL :: AllocationsDone = .FALSE., Found, Converged

  INTEGER :: n, t, istat, other_body_id, iter, NonlinearIter
  REAL(KIND=dp) :: Norm, PrevNorm=0.0d00, NonlinearTol, RelativeChange

  TYPE(ValueList_t), POINTER :: BodyForce, Material, BC, SolverParams
  REAL(KIND=dp), ALLOCATABLE :: MASS(:,:), STIFF(:,:), LOAD(:), FORCE(:)
  REAL(KIND=dp), ALLOCATABLE :: HeatCapacity(:), HeatConductivity(:), &
    Density(:), ExternalTemp(:), TransferCoeff(:), HeatFlux(:)

  CHARACTER(LEN=MAX_NAME_LEN) :: BoundaryType

  SAVE MASS, STIFF, LOAD, FORCE,&
    HeatCapacity, HeatConductivity,&
    Density, ExternalTemp, TransferCoeff, HeatFlux, &
```

```

        AllocationsDone, PrevNorm
!-----

!Allocate some permanent storage, this is done first time only:
!-----
IF ( .NOT. AllocationsDone ) THEN
    N = Solver % Mesh % MaxElementNodes !big enough for elemental arrays
    ALLOCATE( FORCE(N), LOAD(N), MASS(N,N), STIFF(N,N), STAT=istat )
    IF ( istat /= 0 ) THEN
        CALL Fatal( 'MyHeatSolve', &
            'Memory allocation error for matrix/vectors.' )
    END IF
    ALLOCATE( HeatCapacity(N), HeatConductivity(N), Density(N), &
        ExternalTemp(N), TransferCoeff(N), HeatFlux(N), STAT=istat )
    IF ( istat /= 0 ) THEN
        CALL Fatal( 'MyHeatSolve', &
            'Memory allocation error for parameter arrays.' )
    END IF
    AllocationsDone = .TRUE.
END IF

```

In the next step, information on the nonlinear iteration is being read from the solver section of the solver input file

```

!Read in solver parameters
!-----
SolverParams => GetSolverParams()
IF ( .NOT. ASSOCIATED(SolverParams) ) &
    CALL FATAL('MyHeatSolve', 'No Solver section found')
NonlinearIter = GetInteger(SolverParams, &
    'Nonlinear System Max Iterations', Found)
IF ( .NOT. Found ) NonlinearIter = 1
NonlinearTol = GetConstReal( SolverParams, &
    'Nonlinear System Convergence Tolerance', Found )
IF ( .NOT. Found ) NonlinearTol = 1.0D-03

```

Therafter, the nonlinear iteration loop (outermost loop of the white underlayed area in Fig. 13.5) is started and the linear system solver is initialized (routine DefaultInitialize)

```

!-----
! Nonlinear iteration loop
!-----
DO iter=1,NonlinearIter
    Converged = .FALSE.
    WRITE(Message, '(A,I5,A,I5)') 'Nonlinear iteration no.', iter, &
        ' of max. ', NonlinearIter
    CALL INFO('MyHeatSolve', Message, level=1)

    !Initialize the system and do the assembly:
    !-----
    CALL DefaultInitialize()

```

The next loop is over all elements in the simulation domain our solver has been assigned to (Solver % NumberOfActiveElements). The function GetActiveElement inquires the element associated with the element number t. This call at the same time also sets the default pointer CurrentModel % CurrentElement to that particular element, which is important if subsequently called functions rely on

this pointer to be set correctly (see section 13.3). After inquiring the number of nodes the nodal material parameter values  $c_p \rightarrow \text{HeatCapacity}(1:n)$ ,  $k \rightarrow \text{HeatConductivity}(1:n)$  and  $\rho \rightarrow \text{Density}(1:n)$  are read in. If one of these parameters is not found (i.e., `Found == .FALSE.`), a default value of 1 will be set in order to avoid division by zero.

```
!-----
!   Assembly for the domain
!-----
      DO t=1,Solver % NumberOfActiveElements

        ! get element info
        !-----
        Element => GetActiveElement(t)
        n = GetElementNOFNodes()

        ! get material parameters
        !-----
        Material => GetMaterial()
        IF (.NOT. ASSOCIATED(Material)) THEN
          WRITE(Message,'(A,I5,A)') &
            'No material for bulk element no. ',t,' found.'
          CALL FATAL('MyHeatSolve',Message)
        END IF
        HeatCapacity(1:n) = GetReal(Material, 'Heat Capacity', Found )
        IF (.NOT. Found) HeatCapacity(1:n) = 1.0D00
        HeatConductivity(1:n) = &
          GetReal(Material, 'Heat Conductivity', Found )
        IF (.NOT. Found) HeatCapacity(1:n) = 1.0D00
        Density(1:n) = GetReal(Material, 'Density', Found )
        IF (.NOT. Found) Density(1:n) = 1.0D00
```

In order to call the subroutine taking care of the composition of the element matrices and force vector (subroutine `LocalMatrix`), the load vector – in our case the heat source,  $h \rightarrow \text{LOAD}(1:n)$  – has to be read from the body section of the solver input file. In the case of a transient simulation (indicated by `TransientSimulation == .TRUE.`) the first order time discretization is accounted for using the subroutine `Default1stOrderTime`. Mind, that also higher order time discretization routines would be at hand. The local matrix is added to the global coefficient matrix of Elmer Solver calling the subroutine `DefaultUpdateEquations`

```
      !Get load for force vector
      !-----
      LOAD = 0.0d0
      BodyForce => GetBodyForce()
      IF ( ASSOCIATED(BodyForce) ) &
        LOAD(1:n) = GetReal( BodyForce, 'Heat Source', Found )

      !Get element local matrix and rhs vector:
      !-----
      CALL LocalMatrix( MASS, STIFF, FORCE, LOAD, Element, n,&
        HeatCapacity, HeatConductivity, Density, TransientSimulation)

      !Update global matrix and rhs vector from local matrix & vector:
      !-----
      IF ( TransientSimulation ) THEN
        CALL Default1stOrderTime( MASS,STIFF,FORCE )
      END IF
```

```

CALL DefaultUpdateEquations( STIFF, FORCE )

!-----
END DO ! end Assembly for the domain
!-----

```

After the bulk elements, the contribution to the coefficient matrix and the force vector from a Neumann type of boundary condition has to be taken into account. To this end, we are looping over all boundary elements. Their total number is given by `Solver % Mesh % NumberOfBoundaryElements`. The routine `ActiveBoundaryElement` checks whether the previously inquired element is part of a boundary condition that has been assigned to our solver. If the value 1 is returned from the function `GetElementFamily` – i.e. we are dealing with boundary element given at a point element – the element also will be skipped, since Neumann conditions cannot be set on such elements. Finally, the list-pointer to the associated boundary condition section (`GetBC`) is set and the local matrices and vectors are initiated to zero.

```

!-----
!      assembly of Neumann boundary conditions
!-----
DO t=1, Solver % Mesh % NumberOfBoundaryElements

    ! get element and BC info
    ! -----
    Element => GetBoundaryElement(t)
    IF ( .NOT.ActiveBoundaryElement() ) CYCLE
    n = GetElementNOFNodes()
    ! no evaluation of Neumann BC's on points
    IF ( GetElementFamily() == 1 ) CYCLE
    BC => GetBC()

    FORCE = 0.0d00
    MASS = 0.0d00
    STIFF = 0.0d00

```

Since we have to define between different types of boundary conditions, we inquire the contents of a keyword `Boundary Type` from the solver input file. If this string is equal to 'heat flux', the variable with the name 'External Load' will be read in from the boundary condition list BC. Thereafter, the contribution to the force vector will be computed by the internal subroutine `BoundaryCondition` (see later in this code). Mind, that the external load is not the given heat flux,  $q_n$ , but its value divided by the heat capacity and the density,  $l = q_n / (c_p \rho)$ . This has to be taken care of if a numerical value or even a user function is provided in the solver input file (see section 13.3.2). In the case of no boundary type being found or an unknown string being detected, the natural boundary condition, zero flux perpendicular to the surface, will be assumed. This is equivalent to the 'adiabatic' boundary condition. In the case of 'given temperature' the natural boundary condition will be altered by the matrix manipulation arising from the Dirichlet boundary condition (see later in this code).

```

! check type of boundary and set BC accordingly
!-----
BoundaryType = GetString(BC, 'Boundary Type', Found)
IF ( .NOT. Found ) CYCLE
! natural boundary condition
IF ((BoundaryType == 'adiabatic') &
    .OR. (BoundaryType == 'given temperature')) THEN
    CYCLE
! external heat flux
ELSE IF (BoundaryType == 'heat flux') THEN
    ! get external load; mind that this is the heat flux

```

```

! divided by the density and heat capacity
LOAD(1:n) = LOAD(1:n) + GetReal(BC,'External Load', Found)
! do the assembly of the force vector
CALL BoundaryCondition(LOAD, FORCE, Element, n)
ELSE
  WRITE(Message, '(A,I3,A)') &
    'No boundary condition given for BC no. ', GetBCId(), &
    '. Setting it to adiabatic.'
  CALL WARN('MyHeatSolve', Message)
  CYCLE
END IF

```

The boundary element loop is closed after the component system matrix and vector are updated for the current boundary element.

```

IF ( TransientSimulation ) THEN
  MASS = 0.d0
  CALL Default1stOrderTime( MASS, STIFF, FORCE )
END IF

CALL DefaultUpdateEquations( STIFF, FORCE )
!-----
END DO ! end of assembly of Neumann boundary conditions
!-----

```

Before setting the Dirichlet conditions (i.e., given boundary temperature  $T$ ) using the subroutine `DefaultDirichletBCs()` it is important to finish the element-wise assembly of the Elmer Solver system matrix calling `DefaultFinishAssembly`

```

CALL DefaultFinishAssembly()

! call Elmer Solver routine for Dirichlet BCs
! -----
CALL DefaultDirichletBCs()

```

The system is solved by the function call `DefaultSolve`, which returns the norm,  $N^n$  of the solution vector  $T_j$  for the  $n$ -th nonlinear iteration step. This is needed in order to inquire the change of the solution between two steps. If the relative norm

$$R = 2 \frac{|N^{n-1} - N^n|}{N^{n-1} + N^n},$$

is smaller than the given tolerance `Nonlinear System Tolerance` of the solver section, then the nonlinear iteration is taken to be converged.

```

! Solve the system
! -----
Norm = DefaultSolve()

! compute relative change of norm
! -----
IF ( PrevNorm + Norm /= 0.0d0 ) THEN
  RelativeChange = 2.0d0 * ABS( PrevNorm - Norm ) / (PrevNorm + Norm)
ELSE
  RelativeChange = 0.0d0
END IF

WRITE( Message, * ) 'Result Norm : ', Norm

```

```

CALL Info( 'MyHeatSolve', Message, Level=4 )
WRITE( Message, * ) 'Relative Change : ',RelativeChange
CALL Info( 'MyHeatSolve', Message, Level=4 )

! do we have to do another round?
! -----
IF ( RelativeChange < NonlinearTol ) THEN ! NO
    Converged = .TRUE.
    EXIT
ELSE ! YES
    PrevNorm = Norm
END IF
!-----
END DO ! of the nonlinear iteration
!-----

```

After leaving the nonlinear iteration loop the status of convergence shall be displayed on stdio

```

! has non-linear solution converged?
! -----
IF ((.NOT.Converged) .AND. (NonlinearIter > 1)) THEN
    WRITE( Message, * ) 'Nonlinear solution has not converged',&
        'Relative Change=',RelativeChange,'>',NonlinearTol
    CALL Warn('MyHeatSolve', Message)
ELSE
    WRITE( Message, * ) 'Nonlinear solution has converged after ',&
        iter,' steps.'
    CALL Info('MyHeatSolve',Message,Level=1)
END IF

```

In the code lines given above, the user could exchange the routine Warn by Fatal if the simulation should stop upon failed nonlinear iteration convergence.

Further we have to include the needed local subroutines using the Fortran 90 command

```

!-----
! internal subroutines of MyHeatSolver
!-----
CONTAINS

```

The subroutine LocalMatrix composes the local matrices and vectors for a bulk element. The header with the variable declaration reads as follows

```

!-----
SUBROUTINE LocalMatrix(MASS, STIFF, FORCE, LOAD, Element, n, &
    HeatCapacity, HeatConductivity, Density, TransientSimulation)
    IMPLICIT NONE
!-----
    REAL(KIND=dp), DIMENSION(:, :) :: MASS, STIFF
    REAL(KIND=dp), DIMENSION(:) :: FORCE, LOAD, &
        HeatCapacity, HeatConductivity, Density
    INTEGER :: n
    TYPE(Element_t), POINTER :: Element
    LOGICAL :: TransientSimulation
!-----
    REAL(KIND=dp) :: Basis(n),dBasisdx(n,3),ddBasisddx(n,3,3)
    REAL(KIND=dp) :: detJ, LoadAtIP,&

```

```

        LocalHeatCapacity, LocalHeatConductivity, LocalDensity
LOGICAL :: Stat
INTEGER :: t,i,j,DIM
TYPE(GaussIntegrationPoints_t) :: IP

TYPE(Nodes_t) :: Nodes
SAVE Nodes

```

For the sake of simplicity we use the same identifiers as in the solver subroutine for the variables in the argument list.

The next step is to inquire the dimension of the coordinate system. Thereafter, we get the nodes of the element using the already introduced function `GetElementNodes`. Since the values in `CurrentModel % CurrentElement` and `CurrentModel % Solver` have been set, no additional arguments to the variable `Nodes` have to be set. After we have initialized the local matrix and vector components to zero, the information upon the Gauss-points needed for integration is inquired by the function `GaussPoints`. They returned variable `IP` is of type `GaussIntegrationPoints_t`.

```

DIM = CoordinateSystemDimension()

CALL GetElementNodes( Nodes )

STIFF = 0.0d0
FORCE = 0.0d0
MASS = 0.0d0

!Numerical integration:
!-----
IP = GaussPoints( Element )

```

The integration over the element is done by summing over all Gauss-points (from 1 to  $N_{IP} \rightarrow IP \% n$ ). The square root of the determinant of the element coordinate system metric tensor  $\sqrt{\det(\mathbf{J}^T \cdot \mathbf{J})} \rightarrow \text{DetJ}$  as well as the local basis functions,  $\gamma_i \rightarrow \text{Basis}$ , their derivatives,  $\nabla \gamma_i \rightarrow \text{dBasisdx}$ , are evaluated for every Gauss-point using the function `ElementInfo`. The variable `ddBasisddx` is just passed as a dummy argument, since the last argument, `getSecondDerivatives` is set to `.FALSE.`. The pointer to the element, `Element`, and its nodes, `Nodes` and the local variables of the Gauss-points `IP \% U(t)`, `IP \% V(t)` and `IP \% W(t)`, are needed as input.

```

!-----
!   Loop over Gauss-points (element Integration)
!-----
DO t=1,IP \% n
    !Basis function values & derivatives at the integration point:
    !-----
    getSecondDerivatives = .FALSE.
    stat = ElementInfo( Element, Nodes, IP \% U(t), IP \% V(t), &
        IP \% W(t), detJ, Basis, dBasisdx, ddBasisddx, &
        getSecondDerivatives )

```

Thereafter, the material parameters at the Gauss-points are evaluated, using the basis function. For instance, the local density,  $\varrho|_{IP} \rightarrow \text{LocalDensity}$  at the Gauss-point is evaluated as follows:

$$\varrho|_{IP} = \varrho_i \gamma_i|_{IP},$$

with the sum taken over the nodal index  $i$ . The load vector  $h/(\varrho c_p)|_{IP} \rightarrow \text{LoadAtIP}$  is evaluated in a similar way.



```

!Material parameters at integration point:
!-----
LocalHeatCapacity = SUM( HeatCapacity(1:n) * Basis(1:n) )
LocalHeatConductivity = SUM( HeatConductivity(1:n) * Basis(1:n) )
LocalDensity = SUM( Density(1:n) * Basis(1:n) )
!The source term at the integration point:
!-----
LoadAtIP = SUM( Basis(1:n) * LOAD(1:n) ) &
           /(LocalHeatCapacity * LocalDensity)

```

The force vector is obtained by the integral over the element, which is approximated by the sum over all Gauss-point contributions

$$F_j = \int_V \frac{h}{\varrho c_p} \gamma_j DV \approx \sum_{t=1}^{N_{IP}} \left( \sqrt{ds^2} \sqrt{\det(\mathbf{J}^T \cdot \mathbf{J})} \frac{h}{\varrho c_p} \gamma_j \right) |_{IP}.$$

The model coordinate system metric  $\sqrt{ds^2} \rightarrow IP \% s(t)$  as well as the previously inquired element coordinate system metric  $\sqrt{\det(\mathbf{J}^T \cdot \mathbf{J})} \rightarrow \text{DetJ}$  have to be taken into account.

The matrix components are evaluated in complete analogy to the force vector

$$\mathbf{M}_{ij} = \int_V \gamma_j \gamma_i dV \approx \sum_{t=1}^{N_{IP}} \left( \sqrt{ds^2} \sqrt{\det(\mathbf{J}^T \cdot \mathbf{J})} \gamma_j \gamma_i \right) |_{IP},$$

$$\mathbf{A}_{ij} = \int_V \frac{k}{c_p \varrho} \nabla \gamma_j \cdot \nabla \gamma_i dV \approx \sum_{t=1}^{N_{IP}} \left[ \sqrt{ds^2} \sqrt{\det(\mathbf{J}^T \cdot \mathbf{J})} \frac{k}{c_p \varrho} (\nabla \gamma_j \cdot \nabla \gamma_i) \right] |_{IP},$$

where the dot product of the first derivatives of the basis function is implemented using the expression  $\nabla \gamma_j \cdot \nabla \gamma_i \rightarrow \text{SUM}(\text{dBasisdx}(i,1:\text{DIM}) * \text{dBasisdx}(j,1:\text{DIM}))$

```

!-----
!      Loop over j-components of matrices and over force vector
!-----
      DO j=1,n
        FORCE(j) = FORCE(j) + IP % s(t) * DetJ * LoadAtIP * Basis(j)
      !-----
      !      Loop over i-components of matrices
      !-----
      DO i=1,n
        !The mass matrix, if needed
        !-----
        IF (TransientSimulation) THEN
          MASS(i,j) = MASS(i,j) + IP % s(t) * DetJ * &
            Basis(i)*Basis(j)
        END IF

        !Finally, the stiffness matrix:
        !-----
        STIFF(i,j) = STIFF(i,j) &
          + IP % s(t) * DetJ * LocalHeatConductivity &
          * SUM(dBasisdx(i,1:DIM) * dBasisdx(j,1:DIM)) &
          /(LocalDensity * LocalHeatCapacity)
      !-----
      END DO ! end Loop over i-components of matrices
!-----

```

```

        END DO ! end Loop over j-components of matrices and vector
!-----
        END DO ! end Loop over Gauss-points (element Integration)
!-----
        END SUBROUTINE LocalMatrix
!-----

```

The last two statements in the code sequence given above close the loop over the Gauss-points and provide the end statement of the local subroutine `LocalMatrix`.

The subroutine `BoundaryCondition` evaluates the contribution to the force vector at the boundary elements with given external load  $l = q_n / (c_p \varrho) \rightarrow \text{LOAD}$

$$F_j = \oint_{\partial V} l dV \approx \sum_{t=1}^{N_{IP}} \left( \sqrt{ds^2} \sqrt{\det(\mathbf{J}^T \cdot \mathbf{J})} l \right) |_{IP}.$$

Since this is implemented in complete analogy to the assembly of the force vector in the previously discussed subroutine `LocalMatrix`, a detailed explanation can be omitted

```

!-----
SUBROUTINE BoundaryCondition(LOAD, FORCE, Element, n)
  IMPLICIT NONE
!-----
  REAL(KIND=dp), DIMENSION(:) :: FORCE, LOAD
  INTEGER :: n
  TYPE(Element_t), POINTER :: Element
!-----
  REAL(KIND=dp) :: Basis(n), dBasisdx(n,3), ddBasisddx(n,3,3)
  REAL(KIND=dp) :: detJ, LoadAtIP, &
    LocalHeatCapacity, LocalDensity
  LOGICAL :: stat, getSecondDerivatives
  INTEGER :: t, j
  TYPE(GaussIntegrationPoints_t) :: IP

  TYPE(Nodes_t) :: Nodes
  SAVE Nodes
!-----

  CALL GetElementNodes( Nodes )

  FORCE = 0.0d0

  !Numerical integration:
  !-----
  IP = GaussPoints( Element )
!-----
! Loop over Gauss-points (boundary element Integration)
!-----
  DO t=1, IP % n
    !Basis function values & derivatives at the integration point:
    !-----
    getSecondDerivatives = .FALSE.
    stat = ElementInfo( Element, Nodes, IP % U(t), IP % V(t), &
      IP % W(t), detJ, Basis, dBasisdx, ddBasisddx, &
      getSecondDerivatives )
    !The source term at the integration point:

```

```

!-----
LoadAtIP = SUM( Basis(1:n) * LOAD(1:n) )
!-----
!      Loop over j-components of matrices and over force vector
!-----
      DO j=1,n
        FORCE(j) = FORCE(j) + IP % s(t) * DetJ * LoadAtIP * Basis(j)
      END DO
    END DO
!-----
END SUBROUTINE BoundaryCondition
!-----

```

The Fortran 90 file is completed providing the end statement for the user solver subroutine MyHeatSolver.

```

!-----
END SUBROUTINE MyHeatSolver
!-----

```

### 13.4.3 User Defined Functions and Subroutines in Parallel

User defined functions (boundary and initial conditions as well as body forces) and routines (solvers) do not have to be especially adopted to be run within a ElmerSolver\_mpi call. Nevertheless, there might be special situation that demand additional code-lines to avoid issues caused by parallel execution. To that end, one has to be able to retrieve certain information on the parallel environment. Therefore, a special type exist within Elmer with the following entries:

```

TYPE ParEnv_t
  INTEGER                :: PEs
  INTEGER                :: MyPE
  LOGICAL                :: Initialized
  INTEGER                :: ActiveComm
  LOGICAL, DIMENSION(:), POINTER :: Active
  LOGICAL, DIMENSION(:), POINTER :: IsNeighbour
  LOGICAL, DIMENSION(:), POINTER :: SendingNB
  INTEGER                :: NumOfNeighbours
END TYPE ParEnv_t

```

The following list shall give an overview of the most important operations in this context:

**How many parallel processes/domains are there in the current run?** This can be accessed by the construct `ParEnv % PEs`. For instance, the following line can be used to introduce a branch between instructions for a serial and a parallel Elmer run:

```

! serial run
IF ( ParEnv % PEs <= 1 ) THEN

ELSE ! parallel run

ENDIF

```

**What parallel process/domain is the current task being run on?** This number can be inquired via the construct `ParEnv % myPe`

**What parallel process/domain my element belongs to?** If the pointer `CurrentElement` is pointing to the actual element of interest, the host process/domain this `CurrentElement % partIndex`. For instance, in combination with the instruction in the previous point, this can be used to inquire whether an element actually is being processed within the domain (is part of the domain's matrix) or is just an halo-element:

```
! skip rest of routine, because element is not
! part of the domain (halo-element)
IF (ParEnv % myPe .NE. Element % partIndex) CYCLE
```

**Is the parallel process/domain with index  $i$  a neighbour of my current process/domain?** This is inquired by the logical value in `ParEnv % IsNeighbour(i)`

**How many neighbour processes/domains does my current process/domain have?** This is inquired by the logical value in `ParEnv % NumOfNeighbours`

+++++

## 13.5 Compilation and Linking of User Defined Routines/Functions

Elmer provides a script `elmerf90` (residing in `$ELMER_HOME/bin`) for compilation of external routines. This makes sure that the same compiler the Elmer installation has been compiled with is used for compilation of the additional routines. This is necessary, as usually modules of different Fortran compilers are incompatible. Additionally, the script contains the necessary compiler options in order to take care that the essential libraries are being linked to the resulting shared object.

Compilation of ones own code is quite straight forward. It is essential, that the wrapper `elmerf90` is in the path of the system (or alternatively called with its path preceded). If now the routines/functions are in the file `mySolver.f90` then the dynamically linked object is obtained under UNIX/Linux with the command `elmerf90 mySolver.f90 -o mySolver`

Under Windows XP, compilation can be made via the ElmerGUI or manually using the command window (Windows XP: Start → Run, enter `cmd`). Preferably, the source file should be in the tree of the Elmer (e.g.,

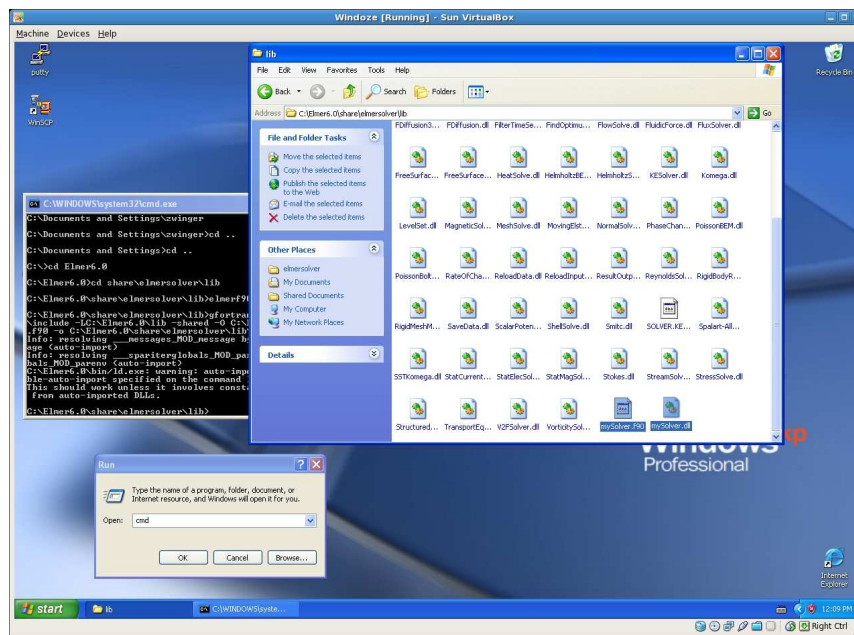


Figure 13.6: Manual compilation of additional modules in Windows XP

`C:\Elmer6.0`) installation under the directory `C:\Elmer6.0\share\elmersolver\lib`. From within this directory, the command

```
elmerf90 myOwnRoutines.f90
```

should create the shared object `mySolver.dll` that should be found automatically in every Elmer run.

# Appendix A

## Format of mesh files

In this appendix the format of ElmerSolver mesh files is described. The mesh data are arranged into four separate files: `mesh.header`, `mesh.nodes`, `mesh.elements`, and `mesh.boundary`.

In parallel computations the names of the files are changed so that `mesh` is replaced by string `part.n` where `n` refers to the number of the partition. Additionally in parallel there is the `part.n.shared` file.

In the mesh files numeric codes are used for distinguishing different element types. For the element type codes and the node numbering order of the elements see also appendix D.

### A.1 The format of header file

The header file `mesh.header` tells how many nodes and elements are present in the mesh. The lines of this file are organized as

```
nodes elements boundary-elements
nof_types
type-code nof_elements
type-code nof_elements
...
```

In the first line the numbers of nodes, elements, and boundary elements are given, while the count in the second line is the number of different element types used in the mesh. The lines which follow give the numbers of elements as sorted into different element types.

For example, the following header file

```
300 261 76
2
404 261
202 76
```

tells us that the mesh is composed of 300 nodes, 261 elements, and 76 boundary elements. Two different element types are used in the mesh: there are 261 elements of type code 404 (bilinear quadrilateral) and 76 elements of type code 202 (linear line element).

### A.2 The format of node file

The file `mesh.nodes` contains node data so that each line defines one node. Each line starts with two integers followed by three real numbers:

```
n1 p x y z
n2 p x y z
...
nn p x y z
```

The first integer is the identification number for the node. The second integer is a partition index for parallel execution and is not usually referenced by the solver in the case of sequential runs. If the partition index is not of particular use, it may be set to be -1 (or 1). The real numbers are the spatial coordinates of the node. Three coordinates should always be given, even if the simulation was done in 1D or 2D. It is also noted that the nodes may be listed in any order.

### A.3 The format of element file

The `mesh.elements` file contains element data arranged as

```
e1 body type n1 ... nn
e2 body type n1 ... nn
...
en body type n1 ... nn
```

Each line starts with an integer which is used for identifying the element. The integer `body` defines the material body which this element is part of. Then the element type code and element nodes are listed. For example, the element file might start with the following lines:

```
1 1 404 1 2 32 31
2 1 404 2 3 33 32
3 1 404 3 4 34 33
4 1 404 4 5 35 34
...
```

### A.4 The format of boundary element file

The elements that form the boundary are listed in the file `mesh.boundary`. This file is similar to the `mesh.elements` file and is organized as

```
e1 bndry p1 p2 type n1 ... nn
e2 bndry p1 p2 type n1 ... nn
...
en bndry p1 p2 type n1 ... nn
```

The first integer is again the identification number of the boundary element. Next the identification number of the part of the boundary where this element is located is given. Whether the boundary element can be represented as the side of a parent element defined in the file `mesh.elements` is indicated using the two parent element numbers `p1` and `p2`. If the boundary element is located on an outer boundary of the body, it has only one parent element and either of these two integers may be set to be zero. It is also possible that both parent element numbers are zeros. Finally the element type code and element nodes are listed.

### A.5 The format of shared nodes file

The nodes that are shared between different partitions are written in the `part.n.shared` file. The file is organized as

```
n1 np p1 p2 ... pm
n2 np p1 p2 ... pm
...
nn np p1 p2 ... pm
```

Here the first index on the row refers to a node that is shared by different partitions, the partition under study being one of the owners. Integer `np` gives the number of partitions sharing the node and this is followed by the number of the sharing partitions. By convention the owner partition is the first one of the partitions. Most shared nodes are shared just by two partitions but they can be also more owners on some nodes.

## A.6 Exceptions on parallel mesh format

When the mesh is saved in parallel there is an exception that must be dealt with. Assume that you have a boundary condition for which you need to assign Dirichlet conditions. If it would happen to be so that some partition shares such boundary node without being the owner of the boundary element itself, the boundary nodes must still somehow be available for setting boundary conditions. In practice this is done so that new single-node elements of type 101 are added to the mesh `.n.boundary` list. These must be given the same `bndry` index as the initial boundary that it was deduced from.

# Appendix B

## Format of result output files

### B.1 Format versions

Result files can be written as either ASCII text or in binary. This is controlled by the parameter

```
Binary output = logical true|false
```

in the 'Simulation' section of the .sif file. Default is `false`.

The format of the file is recorded on it's first line;<sup>1</sup> it's either

```
BINARY v.e
```

or

```
ASCII v
```

The *v* at denotes the version number of the format, and the *e* in the binary format denotes an endianness-marker; either L for little endian or B for big endian.

ElmerSolver can read files of older format versions for restarting, but all new files are written in the newest formats. The current formats documented here are ASCII version 1 and BINARY version 2.

### B.2 General structure

Both binary and ASCII files have the following general structure. In the binary files, the header is separated from the rest by a null byte. The ASCII format has no such separator.

```
[File format version line]
[Header]
[<null byte> (binary only)]
[timestep 1]
[timestep 2]
[timestep 3]
.
.
.
[timestep n]
```

---

<sup>1</sup>except for old ASCII files, that lack the format version line, and start with "`!File started at:`"



### B.2.1 The header

The header looks the same for both binary and ASCII (ans is written in ASCII also for binary files):

```
!File started at: date time
Degrees of freedom:
variable 1      n1   :fs
variable 2      n2   :fs
variable 3      n3   :fs
.
.
.
Total DOFs:      nTotDOFs
Number Of Nodes: nNodes
```

Note that in the list of variables, vectors appear both as vectors (DOF > 1) and separate components (DOF = 1).

### B.2.2 Timesteps

For each time step, the time and the values of the variables are stored. For vector variables, the components are stored as separate variables, typically named *varname 1*, *varname 2*, etc.

If the parameter

```
Omit unchanged variables in output = logical true|false
```

in the 'Simulation' section of the .sif file is set to `true`, only variables whose values has changes since last time are saved. Default is `false`

For the binary format, the following type specifiers are used in this document:

```
<s(str)>  Null terminated string of characters.
<i(i4)>   4 byte integer.
<j(i8)>   8 byte integer.
<x(dbl)>  8 byte floating point number.
```

For this part of the file, the general structure of binary and ASCII files are essentially the same, with just some minor differences:

**ASCII**

Time: *ns nt t*  
*Variablename\_1*  
 [Permutation table  $p_1$ ]  
 ⋮  
 $Var_1(p_1(i))$   
 ⋮  
*Variablename\_2*  
 [Permutation table  $p_2$ ]  
 ⋮  
 $Var_2(p_2(i))$   
 ⋮  
*Variablename\_3*  
 [Permutation table  $p_3$ ]  
 ⋮  
 $Var_3(p_3(i))$   
 ⋮

**Binary**

<Time:(str)><ns(i4)><nt(i4)><t(dbl)>  
 <*Variablename\_1*(str)>  
 [Permutation table  $p_1$ ]  
 ⋮  
 < $Var_1(p_1(i))$ (dbl)>  
 ⋮  
 <*Variablename\_2*(str)>  
 [Permutation table  $p_2$ ]  
 ⋮  
 < $Var_2(p_2(i))$ (dbl)>  
 ⋮  
 <*Variablename\_3*(str)>  
 [Permutation table  $p_3$ ]  
 ⋮  
 < $Var_3(p_3(i))$ (dbl)>  
 ⋮

Variable 1's values  
 $\forall i$  s.t.  $p_1(i) > 0$ .

Variable 2's values  
 $\forall i$  s.t.  $p_2(i) > 0$ .

Variable 3's values  
 $\forall i$  s.t.  $p_3(i) > 0$ .

$nt$ = time step number,  $ns$ = saved time steps number,  $t$ = time.

**The permutation tables**

The permutation tables can be stored in three different ways:

1. As an explicit table:

**ASCII**

Perm: *size np*  
 ⋮  
 $i \quad p(i)$   
 ⋮

**Binary**

<*size*(i4)><*np*(i4)>  
 ⋮  
 < $i$ (i4)>< $p(i)$ (i4)>  
 ⋮

Permutation indexes  $i$   
 and values  $p(i)$   
 $\forall i$  s.t.  $p(i) > 0$ .

*size* = total size of the permutation table ( $> 0$ ), and *np* = number of positive values in the table.

2. If the permutation table is the same as for the previous variable, there's no need to store it again. This case is written as

**ASCII**

Perm: use previous

**Binary**

<-1(i4)><Pos(i8)>

*Pos* in the binary format is the position in bytes of the previous table.

3. No permutation table; corresponds to the case

$$size = np = nNodes, \text{ and } p(i) = i \quad \forall i.$$

This case is stored as

**ASCII**

Perm: NULL

**Binary**

<0(i4)>

### B.3 The positions file

For binary format, a positions file named '*outputfile.pos*' will be created. It contains the positions (in bytes) of the timesteps and variables in the result file, expressed as 8 byte integers. It has the following format ( $nVar$  = number of variables):

```
<Endianness-marker (char)>
<nVar(i4)>
<varname 1(str)>
<varname 2(str)>
:
:
<varname nVar(str)>
<Pos. for Timestep 1(i8)>
<Pos. for variable 1(i8)>
<Pos. for variable 2(i8)>
:
:
<Pos. for variable nVar(i8)>
<Pos. for Timestep 2(i8)>
<Pos. for variable 1(i8)>
<Pos. for variable 2(i8)>
:
:
<Pos. for variable nVar(i8)>
<Pos. for Timestep 3(i8)>
<Pos. for variable 1(i8)>
<Pos. for variable 2(i8)>
:
:
<Pos. for variable nVar(i8)>
:
:
```

Note: Positions are saved for *all* variables for every time step; even if an unchanged variable isn't saved to the result file for a time step, it will still have a position in the .pos file (i.e. the position of where it was saved last time). Because of this all timesteps has the same size of  $(nVar + 1) \times 8$  bytes. Finding the position of the  $n$ :th variable of the  $m$ :th time step is therefore easy; it's found at the

$$(size-of-header + ((nVar + 1) \times (m - 1) + n) \times 8) : th$$

byte in the positions file.

## Appendix C

# Format of ElmerPost Input File

The lines of ElmerPost input file are organized as

```
nn ne nf nt scalar: name vector: name ...
x0 y0 z0
...           ! nn rows of node coordinates (x,y,z)
xn yn zn
group-name element-type i0 ... in
...           ! group data and element descriptions
group-name element-type i0 ... in
#time 1 timestep1 time1
vx vy vz p ...
...           ! nn rows
vx vy vz p ...
#time 2 timestep2 time2
vx vy vz p
...           ! nn rows
vx vy vz p ...
....
#time n timestepn timen
vx vy vz p ...
...           ! nn rows
vx vy vz p ...
```

### The header

The file starts with the header line which contains the following information:

- nn: the total number of nodes
- ne: the total number of the elements including boundary elements
- nf: the total number of degrees of freedom, i.e. the total number of scalar unknowns in the model
- nt: the number of time steps for which solution data is stored
- scalar: name vector: name ... : the list which pairs variable names with their types.

### The mesh and group data

After the header the node coordinates are given, each coordinate triplet on its own row. Three coordinates should be given even if the model was two-dimensional.

Group data consist of the following information:

- `group-name`: the name of the element group (having the same material, body etc.)
- `element-type`: the numeric code giving the element type; see also Appendix D.
- The numbers `i0 ... in` are the indices of the element nodes. The nodes are referenced using the row indices of the node coordinate array at the beginning of the file. The first node in the array has the index zero.

It is noted that there is also another level of element grouping that can be employed as follows

```
#group group1
  element-definitions
  ...
#group group2
  element-definitions
  ...
#endgroup group2
  element-definitions
  ...
#endgroup group1
```

The number of element groups is not restricted in any way.

## The solution data

For each timestep the following solution data is written:

- `#time n t time`: `n` is the order number of the solution data set, `t` is the simulation timestep number, and `time` is the current simulation time.
- The next `nn` rows give the node values of the degrees of freedom. The values are listed in the same order as given in the header with the keywords `scalar:` and `vector:`

## An example file

Here a very simple example file is given. There is only one element, three nodes, one variable, and the solution data are given for a single timestep:

```
3 1 1 1 scalar: Temperature
0 0 0
1 0 0
0 1 0
#group all
body1 303 0 1 2
#endgroup all
#time 1 1 0
1
2
3
```

## Appendix D

### Basic element types

The basic nodal element types which ElmerSolver can handle are the linear and quadratic elements in one, two, and three dimensions. For each element type there is a unique code which consists of the element family (the hundreds) and the number of nodes.

- nodal element (101)
- linear (element type code 202), quadratic (203) and cubic (204) line segments
- linear (303), quadratic (306) and cubic (310) triangles, see Figure D.1

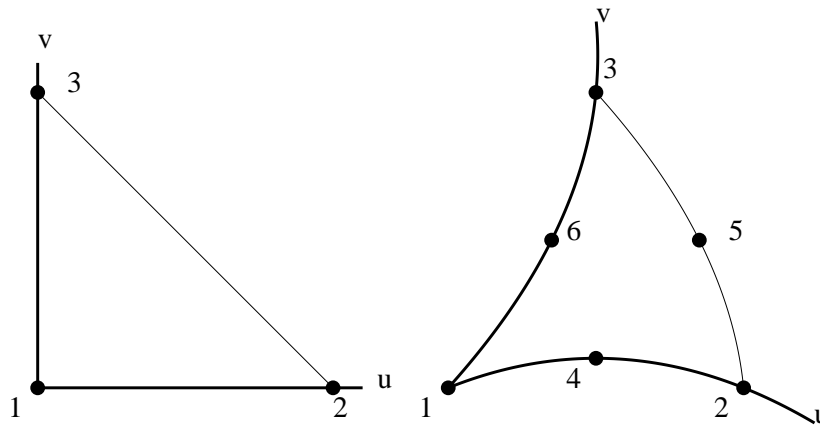


Figure D.1: The linear (303) and quadratic (306) triangular elements.

- bilinear (404), quadratic (408,409) and cubic (412) quadrilaterals, see Figure D.2
- linear (504) and quadratic (510) tetrahedrons, see Figure D.3
- linear (605) and quadratic (613) pyramids
- linear (706) and quadratic (715) wedges
- trilinear (808) and quadratic (820,827) hexahedrons (or bricks), see Figure D.4.

The elementtypes are defined in the file `elements.def` and new elementtypes may be added by adding their definitions to this file.

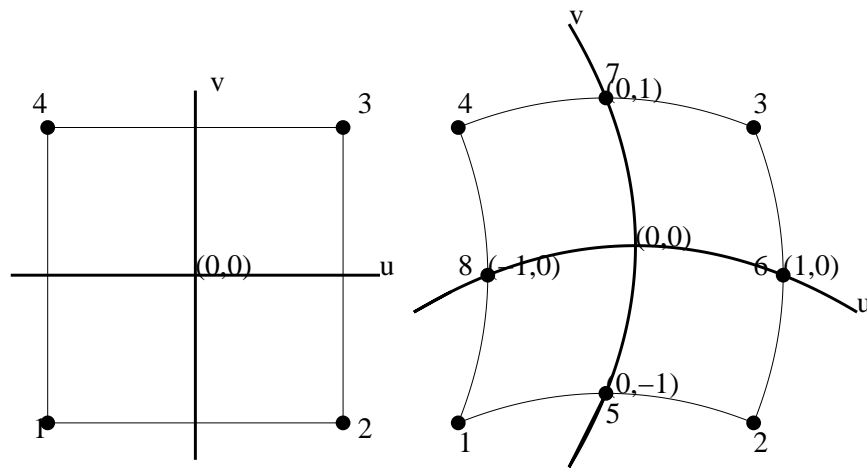


Figure D.2: The four-node (404) and eight-node (408) quadrilateral elements.

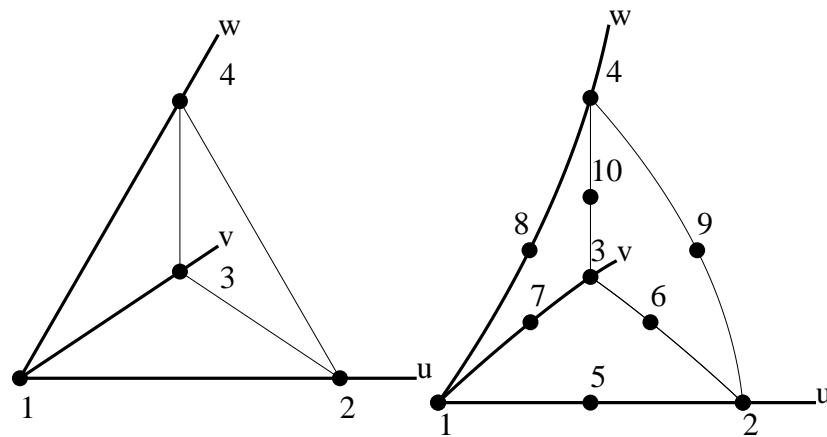


Figure D.3: The linear (504) and quadratic (510) tetrahedron elements.

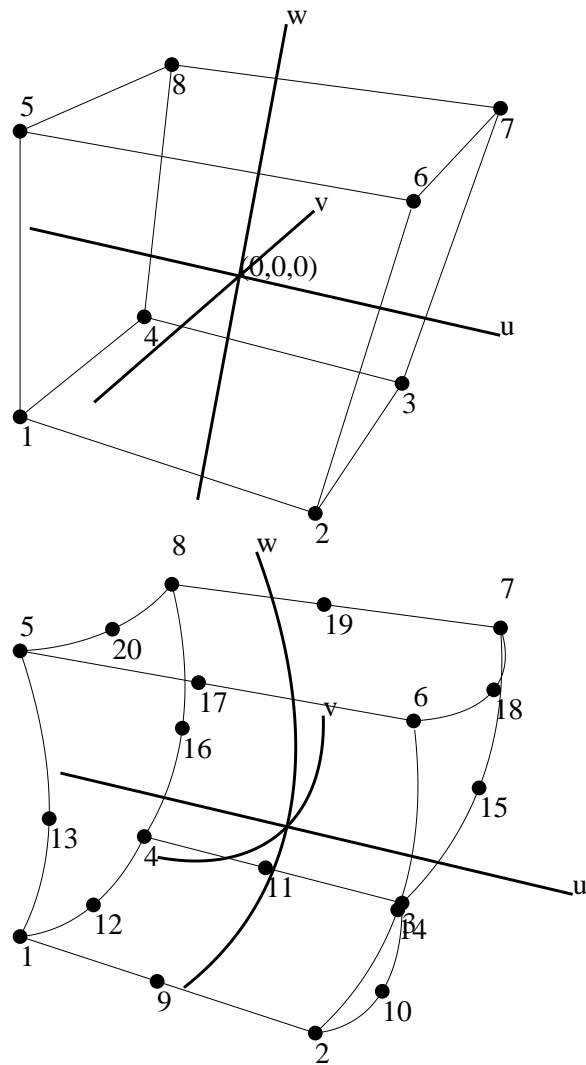


Figure D.4: The 8-node (808) and 20-node (820) hexahedron elements.



# Appendix E

## Higher-order finite elements

### E.1 Theory

Higher-order finite elements are elements for which the degree of basis functions is higher than 1. They differ from usual Lagrange -type elements in a sense that in addition to nodal basis functions there exists basis functions, which are associated with edges, faces and interiors of elements.

- **Size modes** get their values along some edge of element. They vanish towards other edges and all nodal points of element. Side modes are defined for all 2d and 3d elements.
- **Face modes** get their values along some face of element. They vanish towards other faces and all edges and nodal points of element. Face modes are only defined for 3d elements.
- **Internal modes** get their values inside element and vanish towards elements faces, edges and nodal points. They are defined for all 1d, 2d and 3d elements.

Higher-order elements are usually also called  $p$  -elements. Properties for good  $p$ -elements include computational efficiency, at least partial orthogonality and hierarchy of basis functions. With hierarchy we mean that if basis for some element of some given degree  $p$  is  $\mathcal{B}^p$  for  $p + 1$  it holds that  $\mathcal{B}^p \subset \mathcal{B}^{p+1}$ . Orthogonal properties of basis functions ensure, that condition number of the global stiffness matrix does not increase as dramatically as for nodal (Lagrange) elements of higher order. This ensures good numerical stability. Some good references to higher-order finite elements in literature are [3] by Szabo and Babuska and [4] by Solin et al.

The usual element interpolant, now denoted as  $u_{h,p}$ , is for  $p$  elements the sum of nodal, edge, face and bubble interpolants

$$u_{h,p} = u_{h,p}^v + u_{h,p}^e + u_{h,p}^f + u_{h,p}^b \quad (\text{E.1})$$

where  $u_{h,p}^v$  is nodal interpolant as defined before and  $u_{h,p}^e$  edge,  $u_{h,p}^f$  face and  $u_{h,p}^b$  bubble interpolants. Let  $n_e$  be the number of edges and  $n_f$  number of faces in an element. Edge and face interpolants are defined as

$$\begin{aligned} u_{h,p}^e &= \sum_{i=1}^{n_e} u_{h,p}^{e_i} \\ u_{h,p}^f &= \sum_{i=1}^{n_f} u_{h,p}^{f_i} \end{aligned}$$

Contribution of one  $p$  -element to global system is equivalent to that of  $h$ -element. Naturally for higher-order elements the number of local stiffness matrix elements to contribute to global system is greater, because of the larger number of basis functions.

Generally using  $p$  -elements yields a better approximation than using normal linear elements. In fact, convergence for  $p$  elements is exponential when there are no singularities inside or on the boundary of the

solution domain. When there are singular points inside the domain convergence is algebraic. If singular point is a nodal point convergence is twice that of  $h$ -method, otherwise it is equal to the  $h$ -method.

## E.2 Higher-order elements in Elmer

Elements implemented in Elmer follow the ones presented in [3]. Now let us define some orthogonal polynomials based on Legendre polynomials  $P_i(x)$ ,  $i \geq 0$ . So called lobatto shape functions  $\phi_k$  are defined as

$$\phi_k(\xi) = \sqrt{\frac{1}{2(2k-1)}}(P_k(\xi) - P_{k-2}(\xi)), \quad k = 2, 3, \dots \quad (\text{E.2})$$

where  $P_k$  are Legendre polynomials. Function  $\phi$  has two of its roots at  $\pm 1$ , so now define another function,  $\varphi_i$  as

$$\varphi_k(\xi) = \frac{4\phi_k(\xi)}{1-\xi^2}, \quad k = 2, \dots, p \quad (\text{E.3})$$

Functions  $\phi_i$  and  $\varphi_i$  are used to define higher order elements. Different element shapes and their basis functions are defined in appendix E.4. Pyramidal element used in Elmer is based loosely to Devloos representation in [2].

In Elmer elements with varying polynomial degree  $p$  may be used in the same mesh. It is also possible to combine elements of different types in the same mesh, as defined basis functions for edges and faces for different element types are compatible with one another. Pyramidal and wedge higher-order elements to connect tetrahedral and brick elements are also supported. To achieve best possible converge the use of pyramidal elements in a mesh should be kept to a minimum. Global continuity of higher order finite element space used is enforced by the solver, when method `ElementInfo` is used for obtaining basis functions values for elements.

To combine elements of varying degree in mesh maximum rule is used. Thus if two or more elements share an edge and have differing polynomial degrees, maximum of edge's degrees is choosed as degree of global edge.

To declare polynomial degree greater than one to an element, element definition in `mesh.elements` -file needs to be changed. For  $p$  -elements, element definition syntax is

$$T_e[pp_e]$$

where  $T_e = \{202, 303, 404, 504, 605, 706, 808\}$  is the element type and  $p_e \geq 1$  polynomial degree of element. Setting  $p_e = 0$  equals using normal linear basis defined in Elmer. For example, a triangle with polymial degree 4 could be defined in `mesh.elements` file as follows

$$303p4$$

The actual number of degrees of freedom for edges, faces or bubbles of element types is defined by element polynomial degree  $p$ . Each degree of freedom in element is associated with some basis function. The following table gives the number of degrees of freedom for elements used in Elmer.

Element	Nodes	Edges	Faces	Bubbles
Line	2	-	-	$p - 1$
Quadrilateral	4	$4(p - 1)$	-	$\frac{(p-2)(p-3)}{2}$
Triangle	3	$3(p - 1)$	-	$\frac{(p-1)(p-2)}{2}$
Brick	8	$12(p - 1)$	$3(p - 2)(p - 3)$	$\frac{(p-3)(p-4)(p-5)}{6}$
Tetrahedron	4	$6(p - 1)$	$2(p - 1)(p - 2)$	$\frac{(p-1)(p-2)(p-3)}{6}$
Wedge	6	$9(p - 1)$	-	$\frac{(p-2)(p-3)(p-4)}{6}$
(quad. face)	-	-	$\frac{3(p-2)(p-3)}{2}$	-
(triang. face)	-	-	$(p - 1)(p - 2)$	-
Pyramidi	5	$8(p - 1)$	-	$\frac{(p-1)(p-2)(p-3)}{6}$
(quad. face)	-	-	$\frac{(p-2)(p-3)}{2}$	-
(triang. face)	-	-	$2(p - 1)(p - 2)$	-

It is worth noting, however, that used Solver (HeatSolve, StressSolve, etc.) used must be modified to support elements of higher degree. Usually this only consists of making local stiffness matrix and force vector larger.

A  $p$ -element passed to Elmer gaussian point generator `GaussPoints` defined in module `Integration` returns enough integration points to integrate worst case product of two element basis functions. Here worst case is integration over two basis functions for which  $p_m = \max\{p_e, p_f, p_b\}$ . As gaussian quadrature is accurate to degree  $p = 2n - 1$ , where  $n$  is the number of points used, number of points for each element is calculated from

$$n = \frac{2p_m + 1}{2} \quad (\text{E.4})$$

and rounded up to nearest integer. To get the final number of points for multiple integrals,  $n$  is raised to the power of element dimension. If integral includes a non-constant factor, i.e.  $\int_K \alpha \phi_i \phi_j$  where  $\alpha$  is a function of degree  $k$ , numerical integration is not accurate and number of integration points needs to be set manually. Now minimum number of gaussian points to integrate element accurately becomes

$$n = \frac{\min\{2p_m + k, 3p_m\} + 1}{2} \quad (\text{E.5})$$

which may again be rounded up to nearest integer and raised to power of element dimension to get the actual number of integration points.

### E.2.1 Boundary conditions

Boundary elements (elements, which lie on a boundary of a computational domain) obey the parity of their parent element. Basis for elements on boundary is defined so that it represents a projection from high to low dimension in element space. Thus it is possible to integrate along the boundary of the computational domain and use values obtained to set Neumann boundary conditions, for example. Treatment of Neumann and Newtonian is analogous to classical cases presented in many finite element method textbooks, except for the greater number of basis functions to set.

In Elmer, Newtonian and Neumann boundary conditions are set by integrating over element boundaries and contributing these integrals to global system. For higher order elements this procedure may also be used, because higher order functions of boundary elements are given the direction of their parent. Thus values returned for boundary element are equal to values of their parent elements higher order functions on element boundary. Indexes for contribution to global system may be acquired from procedure defined in module `DefUtils`

```
getBoundaryIndexes( Mesh, Element, Parent, Indexes, indSize )
```

which returns global indexes of contribution for boundary element `Element` to given vector `Indexes`, given the finite element mesh `Mesh` and parent element `Parent` of boundary element. Also the size of created index vector is returned to `indSize`.

Nonhomogeneous Dirichlet type boundary conditions, e.g.  $u = g$ , on  $\partial T$  are more difficult to handle for higher order elements. Even though the nodal values are known, the coefficients of higher order functions are linear combinations over whole element boundary and thus it cannot be set as a nodal value.

Subroutine `DefaultDirichletBCs` solves unknown coefficients of higher order functions by minimizing boundary problem energy. Problem given is then equivalent to that of standard fem, except that integrals and functions are calculated along boundary of the computational domain. Generally, from a solver user point of view, Dirichlet boundary conditions need no extra actions compared to the use of normal elements.

### E.2.2 Some practical aspects

Typical singular points in the solution are points where boundary condition or material parameters change abruptly or vertex type singularities (such as the inner node of a l-shaped beam or a crack tip). In these cases convergence of the  $p$ -method is twice that of  $h$ -method.

However, it is much more expensive computationally to use high polynomial degree than use many elements of low degree. Therefore, if possible, mesh should be designed in a way that near nodal singularities small low degree ( $p = 1$ ) elements were used. In other parts of the solution domain, where the solution is smoother, large elements with high polynomial degree are advised. As Elmer is not  $hp$ -adaptive, and element polynomial degree is not modified by the solver, mesh design issues must be taken into account for computational efficiency.

It is well known that for linear problems it is possible reduce the size of the global problem by leaving out all bubble functions. This procedure is often called condensation. In Elmer condensation for local stiffness matrix may be done (and is advised to be done) for linear systems which do not need stabilization. Condensation is done by routine `CondensateP` located in module `SolverUtils`. More precisely routine is expressed as

```
CondensateP(N, Nb, K, F, F1)
```

where  $N$  is the number of all nodal, edge and face degrees of freedom,  $Nb$  the number of internal degrees of freedom,  $K$  local stiffness matrix,  $F$  local force vector and  $F1$  optional second force vector.

## E.3 ElmerSolver services for higher-order elements

This section describes some of the services related to  $p$  elements, which are included in different parts of the Solver.

### E.3.1 Properties of $p$ element

For determining  $p$  element properties there are several utilities. First of all it is possible to check if some element is a  $p$  element by checking elements `isPElement` flag. If flag is set to true, element is a  $p$ -element. Functions

```
isPTriangle( Element )
isPTetra( Element )
isPPyramid( Element )
isPWedge( Element )
```

check if given element is  $p$  type triangle, tetrahedron, pyramid or wedge. They are implemented because used  $p$  reference triangles, tetrahedrals, pyramids and wedges are different than those defined for Lagrange type elements. For determining maximum degrees of element edges or faces, routines

```
getEdgeP( Element, Mesh )
getFaceP( Element, Mesh )
```

return the maximum polynomial degree of elements edges or faces, when given `Element` and finite element mesh `Mesh`.

### E.3.2 Fields related to $p$ elements

In module `Types`, type `Element_t` has following  $p$  element related fields

```
INTEGER :: TetraType
LOGICAL :: isPElement
LOGICAL :: isEdge
INTEGER :: localNumber
INTEGER :: GaussPoints
```

`TetraType` defines type of tetrahedral  $p$  element. For nontetrahedral elements `TetraType`=0, for tetrahedral elements `TetraType`={1, 2}.

`isPElement` defines if an element is of higher-order. `isPElement`=`.TRUE.` for  $p$ -elements, `.FALSE.` otherwise.

`isEdge` defines if an element is edge element for some higher entity, i.e. edge or face of a 2d or 3d element. If `isEdge`=`.TRUE.` element is an edge, `.FALSE.` otherwise.

`localNumber` defines the local number of boundary elements, that is which local edge or face number boundary element has in respect to its' parent element.

`GaussPoints` defines the number of gauss points for element. Value is calculated from  $n = \left(\frac{2p_m+1}{2}\right)^d$ , where  $d$  is element dimension and  $p_m$  element maximum polynomial degree.  $n$  is rounded up to nearest integer. Variable `GaussPoints` has enough quadrature points to integrate function of degree  $2p_m$  accurately.

When modifying local solver to support higher order elements, the maximum size for some element stiffness matrix or force vector may be obtained from mesh variable `MaxElementDOFs`. This variable is set by the mesh read-in process to the maximum degrees of freedom for single element in mesh.

### E.3.3 Higher order basis and element mappings

Basis for higher order elements is defined in module `PElementBase`. Module contains also definitions for  $\phi$  and  $\varphi$ -functions and Legendre polynomials. These definitions have been generated to implicit form with symbolic program **Maple** [1] up to  $p_{\max} \leq 20$ . This mean that no recursion is needed for generation of values of Legendre polynomials or other lower level components based on them, if used  $p < p_{\max}$ .

Generally higher order basis functions take as their arguments the point in which to calculate function value and indexing  $i, m(i, j)$  or  $m(i, j, k)$  depending on the function type. All edge functions take in addition to these parameters a special optional flag, namely `invertEdge`, which defines if direction of edge basis function needs to be inverted. In Elmer all edges are globally traversed from smaller to higher node. That is, let  $A$  and  $B$  be global node numbers of edges. The varying parameter of edge function then varies between  $[-1, 1]$  from  $A \rightarrow B$  globally. Inversion is then used for enforcing global continuity of edge basis functions which are not properly aligned. Edge rule is presented in figure E.3.3




Figure E.1: Global direction of edge. For global node indexes  $A < B$

Most of the face functions take as their optional argument the local numbering based on which face functions are formed. This local direction is formed according to global numbers of face nodes. There are rules for triangular and square faces. Let  $A, B, C$  be global nodes of a triangular face. Globally face is aligned so that  $A < B < C$ . For square faces  $A = \min\{v_i\}$  where  $v_i$  are global nodes of square face and  $B, C$  are nodes next to node  $A$  on face. Square face is aligned by rule  $A < B < C$  for these nodes. These rules are presented in figure E.3.3.

Tetrahedral element is an exception to the above interface rules, i.e. edge and face functions of tetrahedral elements take type of tetrahedral element as their optional argument. This is due to fact that it is possible to reduce any tetrahedral element to one of the two reference tetrahedral elements for which all edges and faces are defined so that their local orientation matches global orientation. This means, that for tetrahedral

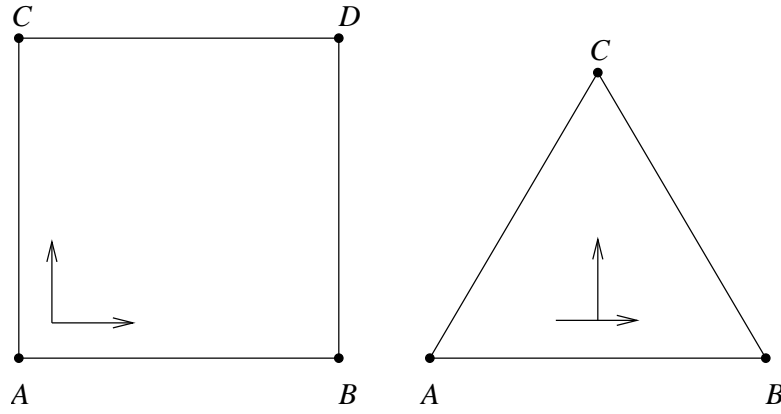


Figure E.2: Global direction of triangular and quadrilateral faces. For global node indexes  $A < B < C$ ;  $A$  has lowest index among indexes of face.

elements, global continuity does not need to be enforced, if proper reduction to one of the two reference elements has been made.

Mappings from element nodal numbers to different  $p$  element edges or faces are defined in module `PElementMaps`. Mappings generally define which nodes of element belong to certain local edge or face of elements. Mappings to elements edges, faces and from faces to local edge numbers may be obtained from routines `GetElementEdgeMap`, `GetElementFaceMap` and `GetElementFaceEdgeMap`. Mappings may also be accessed by via methods `getTePeMap`, where  $T_e$  is element name and  $P_e = \{\text{Edge}, \text{Face}\}$  is part of element to get map for. Routine `getElementBoundaryMap` returns mappings for element boundaries depending on element type.

For example, to get global nodes for brick face number 4, one would use the following Fortran90 code

```
map(1:4) = getBrickFaceMap(4)
nodes(1:4) = Element % NodeIndexes(map)
```

## E.4 Higher-order elements

Let  $\lambda_1, \lambda_2, \lambda_3 \in \{\pm\xi, \pm\eta, \pm\zeta\}$  and additionally  $\bigcap_i \lambda_i = \phi$ .

## E.5 Line




Figure E.3: Line element

### E.5.1 Nodal basis

$$\begin{aligned} L_1 &= \frac{1 - \xi}{2} \\ L_2 &= \frac{1 + \xi}{2} \end{aligned}$$

### E.5.2 Bubble basis

$$L_i^{(0)} = \phi_i(\xi), \quad i = 2, \dots, p$$

## E.6 Quadrilateral

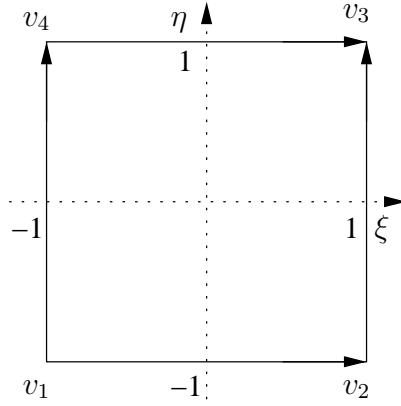


Figure E.4: Quadrilateral element

### E.6.1 Nodal basis

$$\begin{aligned} N_1 &= \frac{1}{4}(1 - \xi)(1 - \eta) \\ N_2 &= \frac{1}{4}(1 + \xi)(1 - \eta) \\ N_3 &= \frac{1}{4}(1 + \xi)(1 + \eta) \\ N_4 &= \frac{1}{4}(1 - \xi)(1 + \eta) \end{aligned}$$

### E.6.2 Edge basis

$$\begin{aligned} N_i^{(1,2)} &= \frac{1}{2}(1 - \eta)\phi_i(\xi), \quad i = 2, \dots, p \\ N_i^{(2,3)} &= \frac{1}{2}(1 + \xi)\phi_i(\eta), \quad i = 2, \dots, p \\ N_i^{(4,3)} &= \frac{1}{2}(1 + \eta)\phi_i(\xi), \quad i = 2, \dots, p \\ N_i^{(1,4)} &= \frac{1}{2}(1 - \xi)\phi_i(\eta), \quad i = 2, \dots, p \end{aligned}$$

### E.6.3 Bubble basis

$$N_{m(i,j)}^{(0)} = \phi_i(\xi)\phi_j(\eta)$$

where  $i, j \geq 2$ ,  $i + j = 4, \dots, p$

## E.7 Triangle

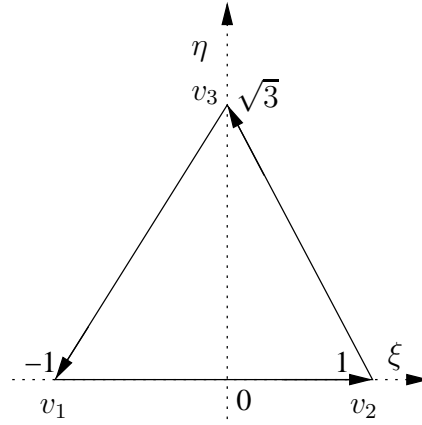


Figure E.5: Triangle element

### E.7.1 Nodal basis

$$\begin{aligned} L_1 &= \frac{1}{2}\left(1 - \xi - \frac{1}{\sqrt{3}}\eta\right) \\ L_2 &= \frac{1}{2}\left(1 + \xi - \frac{1}{\sqrt{3}}\eta\right) \\ L_3 &= \frac{\eta}{\sqrt{3}} \end{aligned}$$

### E.7.2 Edge basis

$$\begin{aligned} N_i^{(1,2)} &= L_1 L_2 \varphi_i(L_2 - L_1), \quad i = 2, \dots, p \\ N_i^{(2,3)} &= L_2 L_3 \varphi_i(L_3 - L_2), \quad i = 2, \dots, p \\ N_i^{(3,1)} &= L_3 L_1 \varphi_i(L_1 - L_3), \quad i = 2, \dots, p \end{aligned}$$

### E.7.3 Bubble basis

$$N_{m(j,n)}^{(0)} = L_1 L_2 L_3 P_1(L_2 - L_1)^j P_1(2L_3 - 1)^n$$

where  $j, n = 0, \dots, i-3$ ,  $j+n = i-3$ ,  $i = 3, \dots, p$



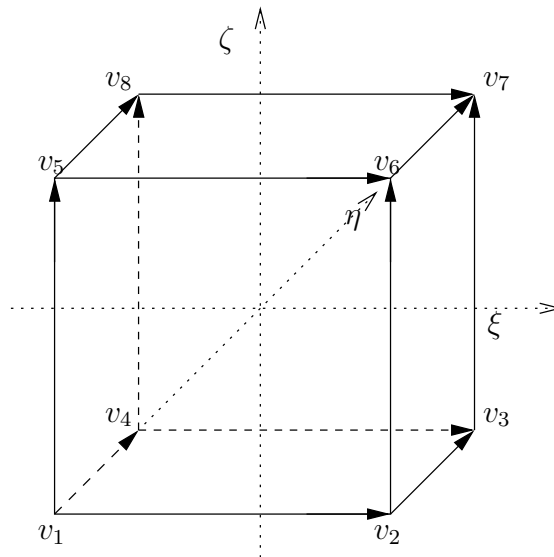


Figure E.6: Brick element

## E.8 Brick

### E.8.1 Nodal basis

$$N_1 = \frac{1}{8}(1 - \xi)(1 - \eta)(1 - \zeta)$$

$$N_2 = \frac{1}{8}(1 + \xi)(1 - \eta)(1 - \zeta)$$

$$N_3 = \frac{1}{8}(1 + \xi)(1 + \eta)(1 - \zeta)$$

$$N_4 = \frac{1}{8}(1 - \xi)(1 + \eta)(1 - \zeta)$$

$$N_5 = \frac{1}{8}(1 - \xi)(1 - \eta)(1 + \zeta)$$

$$N_6 = \frac{1}{8}(1 + \xi)(1 - \eta)(1 + \zeta)$$

$$N_7 = \frac{1}{8}(1 + \xi)(1 + \eta)(1 + \zeta)$$

$$N_8 = \frac{1}{8}(1 - \xi)(1 + \eta)(1 + \zeta)$$

### E.8.2 Edge basis

$$\begin{aligned}
N_{i-1}^{1,2} &= \frac{1}{4}\phi_i(\xi)(1-\eta)(1-\zeta) \\
N_{i-1}^{2,3} &= \frac{1}{4}\phi_i(\eta)(1+\xi)(1-\zeta) \\
N_{i-1}^{4,3} &= \frac{1}{4}\phi_i(\xi)(1+\eta)(1-\zeta) \\
N_{i-1}^{1,4} &= \frac{1}{4}\phi_i(\eta)(1-\xi)(1-\zeta) \\
N_{i-1}^{1,5} &= \frac{1}{4}\phi_i(\zeta)(1-\xi)(1-\eta) \\
N_{i-1}^{2,6} &= \frac{1}{4}\phi_i(\zeta)(1+\xi)(1-\eta) \\
N_{i-1}^{3,7} &= \frac{1}{4}\phi_i(\zeta)(1+\xi)(1+\eta) \\
N_{i-1}^{4,8} &= \frac{1}{4}\phi_i(\zeta)(1-\xi)(1+\eta) \\
N_{i-1}^{5,6} &= \frac{1}{4}\phi_i(\xi)(1-\eta)(1+\zeta) \\
N_{i-1}^{6,7} &= \frac{1}{4}\phi_i(\eta)(1+\xi)(1+\zeta) \\
N_{i-1}^{8,7} &= \frac{1}{4}\phi_i(\xi)(1+\eta)(1+\zeta) \\
N_{i-1}^{5,8} &= \frac{1}{4}\phi_i(\eta)(1-\xi)(1+\zeta)
\end{aligned}$$

### E.8.3 Face basis

$$\begin{aligned}
N_{m(i,j)}^{(1,2,5,6)} &= \frac{1}{2}(1-\eta)\phi_i(\xi)\phi_j(\zeta) \\
N_{m(i,j)}^{(1,2,4,3)} &= \frac{1}{2}(1-\zeta)\phi_i(\xi)\phi_j(\eta) \\
N_{m(i,j)}^{(1,4,5,8)} &= \frac{1}{2}(1-\xi)\phi_i(\eta)\phi_j(\zeta) \\
N_{m(i,j)}^{(4,3,8,7)} &= \frac{1}{2}(1+\eta)\phi_i(\xi)\phi_j(\zeta) \\
N_{m(i,j)}^{(5,6,8,7)} &= \frac{1}{2}(1+\zeta)\phi_i(\xi)\phi_j(\eta) \\
N_{m(i,j)}^{(2,3,6,7)} &= \frac{1}{2}(1+\xi)\phi_i(\eta)\phi_j(\zeta)
\end{aligned}$$

where  $i, j = 2, 3, \dots, p-2$ ,  $i+j = 4, 5, \dots, p$

### E.8.4 Bubble basis

$$N_{m(i,j,k)}^{(0)} = \phi_i(\xi)\phi_j(\eta)\phi_k(\zeta)$$

where  $i, j, k = 2, 3, \dots, p-4$ ,  $i+j+k = 6, 7, \dots, p$

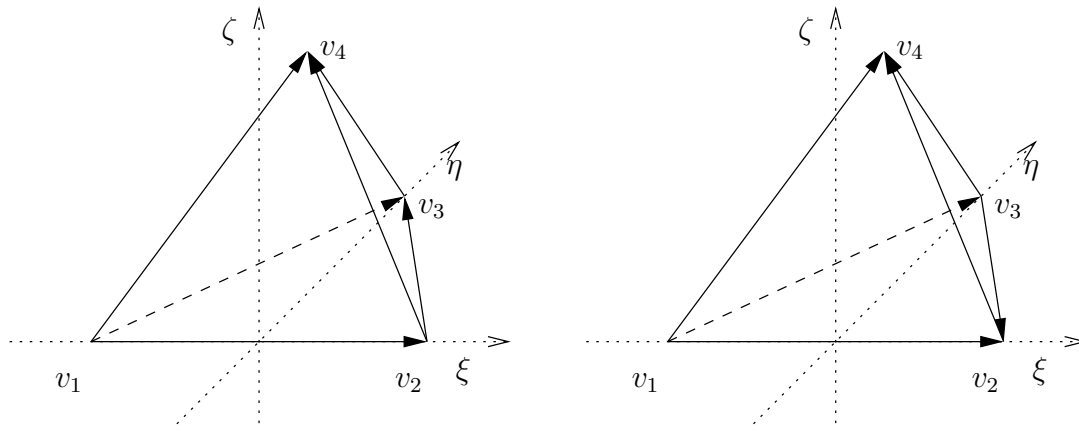


Figure E.7: Tetrahedral elements of types 1 and 2

## E.9 Tetrahedron

### E.9.1 Nodal basis

$$\begin{aligned}
 L_1 &= \frac{1}{2} \left( 1 - \xi - \frac{1}{\sqrt{3}} \eta - \frac{1}{\sqrt{6}} \zeta \right) \\
 L_2 &= \frac{1}{2} \left( 1 + \xi - \frac{1}{\sqrt{3}} \eta - \frac{1}{\sqrt{6}} \zeta \right) \\
 L_3 &= \frac{\sqrt{3}}{3} \left( \eta - \frac{1}{\sqrt{8}} \zeta \right) \\
 L_4 &= \sqrt{\frac{3}{8}} \zeta
 \end{aligned}$$

### E.9.2 Edge basis

#### Type 1

$$\begin{aligned}
 N_{i-1}^{(1,2)} &= L_1 L_2 \varphi_i(L_2 - L_1), \quad i = 2, \dots, p \\
 N_{i-1}^{(1,3)} &= L_1 L_3 \varphi_i(L_3 - L_1), \quad i = 2, \dots, p \\
 N_{i-1}^{(1,4)} &= L_1 L_4 \varphi_i(L_4 - L_1), \quad i = 2, \dots, p \\
 N_{i-1}^{(2,3)} &= L_2 L_3 \varphi_i(L_3 - L_2), \quad i = 2, \dots, p \\
 N_{i-1}^{(2,4)} &= L_2 L_4 \varphi_i(L_4 - L_2), \quad i = 2, \dots, p \\
 N_{i-1}^{(3,4)} &= L_3 L_4 \varphi_i(L_4 - L_3), \quad i = 2, \dots, p
 \end{aligned}$$

#### Type 2

$$N_{i-1}^{(3,2)} = L_3 L_2 \varphi_i(L_2 - L_3), \quad i = 2, \dots, p$$

Edges (1, 2), (1, 3), (1, 4), (2, 4) ja (3, 4) according to type 1.

### E.9.3 Face basis

#### Type 1

$$\begin{aligned}
N_{m(i,j)}^{(1,2,3)} &= L_1 L_2 L_3 P_i (L_2 - L_1) P_j (2L_3 - 1) \\
N_{m(i,j)}^{(1,2,4)} &= L_1 L_2 L_4 P_i (L_2 - L_1) P_j (2L_4 - 1) \\
N_{m(i,j)}^{(1,3,4)} &= L_1 L_4 L_3 P_i (L_3 - L_1) P_j (2L_4 - 1) \\
N_{m(i,j)}^{(2,3,4)} &= L_2 L_3 L_4 P_i (L_3 - L_2) P_j (2L_4 - 1)
\end{aligned}$$

### Type 2

$$\begin{aligned}
N_{m(i,j)}^{(1,3,2)} &= L_1 L_3 L_2 P_i (L_3 - L_1) P_j (2L_2 - 1) \\
N_{m(i,j)}^{(3,2,4)} &= L_3 L_2 L_4 P_i (L_2 - L_3) P_j (2L_4 - 1)
\end{aligned}$$

where  $i, j = 0, 1, 2, \dots, p-3$ ,  $i+j = 0, 1, \dots, p-3$ . Faces (1, 2, 4) and (1, 3, 4) defined according to type 1.

### E.9.4 Bubble basis

$$N_{m(i,j,k)}^{(0)} = L_1 L_2 L_3 L_4 P_i (L_2 - L_1) P_j (2L_3 - 1) P_k (2L_4 - 1)$$

where  $i, j, k = 0, 1, \dots, p-4$ ,  $i+j+k = 0, 1, \dots, p-4$

## E.10 Pyramid

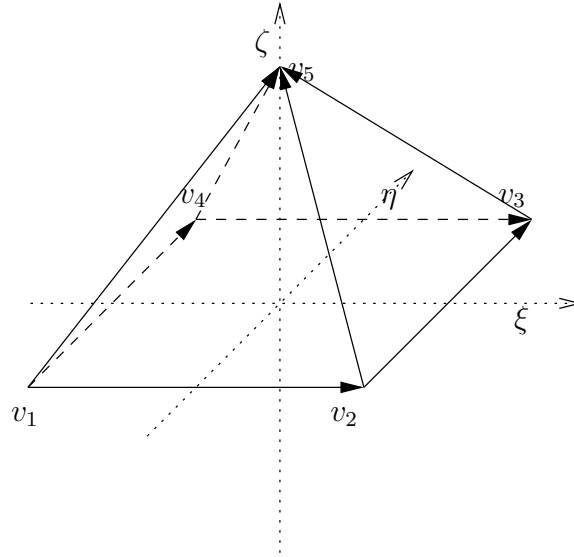


Figure E.8: Pyramidal element

### E.10.1 Nodal basis

$$T_0(c, t) = \frac{(1 - \frac{t}{\sqrt{2}}) - c}{2(1 - \frac{t}{\sqrt{2}})}$$

$$T_1(c, t) = \frac{(1 - \frac{t}{\sqrt{2}}) + c}{2(1 - \frac{t}{\sqrt{2}})}$$

$$P_1 = T_0(\xi, \zeta)T_0(\eta, \zeta)(1 - \frac{\zeta}{\sqrt{2}})$$

$$P_2 = T_1(\xi, \zeta)T_0(\eta, \zeta)(1 - \frac{\zeta}{\sqrt{2}})$$

$$P_3 = T_1(\xi, \zeta)T_1(\eta, \zeta)(1 - \frac{\zeta}{\sqrt{2}})$$

$$P_4 = T_0(\xi, \zeta)T_1(\eta, \zeta)(1 - \frac{\zeta}{\sqrt{2}})$$

$$P_5 = \frac{1}{\sqrt{2}}\zeta$$

### E.10.2 Edge basis

$$P_{i-1}^{(1,2)} = P_1(\xi, \eta, \zeta)P_2(\xi, \eta, \zeta)\varphi_i(\xi)$$

$$P_{i-1}^{(2,3)} = P_2(\xi, \eta, \zeta)P_3(\xi, \eta, \zeta)\varphi_i(\eta)$$

$$P_{i-1}^{(4,3)} = P_4(\xi, \eta, \zeta)P_3(\xi, \eta, \zeta)\varphi_i(\xi)$$

$$P_{i-1}^{(1,4)} = P_1(\xi, \eta, \zeta)P_4(\xi, \eta, \zeta)\varphi_i(\eta)$$

$$P_{i-1}^{(1,5)} = P_1(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)\varphi_i(\frac{\xi}{2} + \frac{\eta}{2} + \frac{\zeta}{\sqrt{2}})$$

$$P_{i-1}^{(2,5)} = P_2(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)\varphi_i(-\frac{\xi}{2} + \frac{\eta}{2} + \frac{\zeta}{\sqrt{2}})$$

$$P_{i-1}^{(3,5)} = P_3(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)\varphi_i(-\frac{\xi}{2} - \frac{\eta}{2} + \frac{\zeta}{\sqrt{2}})$$

$$P_{i-1}^{(4,5)} = P_4(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)\varphi_i(\frac{\xi}{2} - \frac{\eta}{2} + \frac{\zeta}{\sqrt{2}})$$

### E.10.3 Face basis

#### Square face

$$P_{m(i,j)}^{(1,2,3,4)} = P_1(\xi, \eta, \zeta)P_3(\xi, \eta, \zeta)\varphi_i(\xi)\varphi_j(\eta)$$

where  $i, j = 2, \dots, p-2$ ,  $i+j = 4, \dots, p$ .

#### Triangular faces

$$P_{m(i,j)}^{(1,2,5)} = P_1(\xi, \eta, \zeta)P_2(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)P_i(P_2(\xi, \eta, \zeta) - P_1(\xi, \eta, \zeta))P_j(2P_5(\xi, \eta, \zeta) - 1)$$

$$P_{m(i,j)}^{(2,3,5)} = P_2(\xi, \eta, \zeta)P_3(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)P_i(P_3(\xi, \eta, \zeta) - P_2(\xi, \eta, \zeta))P_j(2P_5(\xi, \eta, \zeta) - 1)$$

$$P_{m(i,j)}^{(3,4,5)} = P_3(\xi, \eta, \zeta)P_4(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)P_i(P_4(\xi, \eta, \zeta) - P_3(\xi, \eta, \zeta))P_j(2P_5(\xi, \eta, \zeta) - 1)$$

$$P_{m(i,j)}^{(4,1,5)} = P_4(\xi, \eta, \zeta)P_1(\xi, \eta, \zeta)P_5(\xi, \eta, \zeta)P_i(P_1(\xi, \eta, \zeta) - P_4(\xi, \eta, \zeta))P_j(2P_5(\xi, \eta, \zeta) - 1)$$

where  $i, j = 0, \dots, p-3$ ,  $i+j = 0, \dots, p-3$  and  $P_i, P_j$  Legendre polynomials.

#### E.10.4 Bubble basis

$$P_{m(i,j,k)}^{(0)} = P_1(\xi, \eta, \zeta) P_3(\xi, \eta, \zeta) P_5(\xi, \eta, \zeta) P_i\left(\frac{\xi}{1-\frac{\zeta}{\sqrt{2}}}\right) P_j\left(\frac{\eta}{1-\frac{\zeta}{\sqrt{2}}}\right) P_k\left(\frac{\zeta}{\sqrt{2}}\right)$$

where  $i, j, k = 0, \dots, p-4$ ,  $i+j+k = 0, \dots, p-4$  and  $P_i, P_j, P_k$  Legendre polynomials

### E.11 Wedge

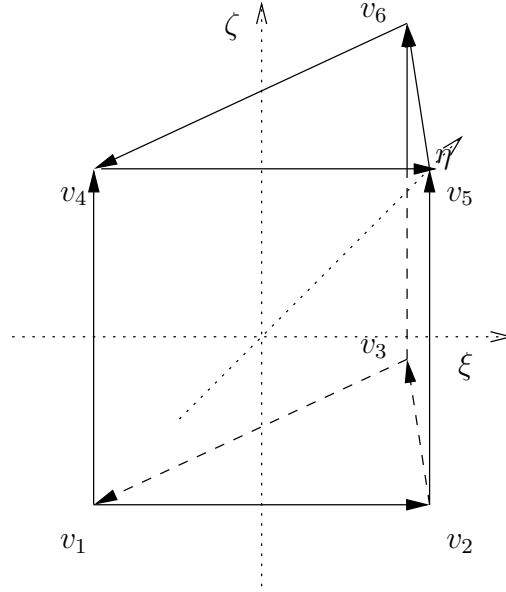


Figure E.9: Wedge element

#### E.11.1 Nodal basis

$$\begin{aligned} L_1 &= \frac{1}{2} \left( 1 - \xi - \frac{1}{\sqrt{3}} \eta \right) \\ L_2 &= \frac{1}{2} \left( 1 + \xi - \frac{1}{\sqrt{3}} \eta \right) \\ L_3 &= \frac{\sqrt{3}}{3} \eta \end{aligned}$$

$$\begin{aligned}
H_1 &= \frac{1}{2}L_1(1 - \zeta) \\
H_2 &= \frac{1}{2}L_2(1 - \zeta) \\
H_3 &= \frac{1}{2}L_3(1 - \zeta) \\
H_4 &= \frac{1}{2}L_1(1 + \zeta) \\
H_5 &= \frac{1}{2}L_2(1 + \zeta) \\
H_6 &= \frac{1}{2}L_3(1 + \zeta)
\end{aligned}$$

### E.11.2 Edge basis

$$\begin{aligned}
H_{i-1}^{(1,2)} &= \frac{1}{2}L_1L_2\varphi_i(L_2 - L_1)(1 - \zeta) \\
H_{i-1}^{(2,3)} &= \frac{1}{2}L_2L_3\varphi_i(L_3 - L_2)(1 - \zeta) \\
H_{i-1}^{(3,1)} &= \frac{1}{2}L_3L_1\varphi_i(L_1 - L_3)(1 - \zeta) \\
H_{i-1}^{(4,5)} &= \frac{1}{2}L_4L_5\varphi_i(L_5 - L_4)(1 + \zeta) \\
H_{i-1}^{(5,6)} &= \frac{1}{2}L_5L_6\varphi_i(L_6 - L_5)(1 + \zeta) \\
H_{i-1}^{(6,4)} &= \frac{1}{2}L_6L_4\varphi_i(L_4 - L_6)(1 + \zeta) \\
H_{i-1}^{(1,4)} &= L_1\phi_i(\zeta) \\
H_{i-1}^{(2,5)} &= L_2\phi_i(\zeta) \\
H_{i-1}^{(3,6)} &= L_3\phi_i(\zeta)
\end{aligned}$$

### E.11.3 Face basis

#### Triangular faces

$$\begin{aligned}
H_{m(i,j)}^{(1,2,3)} &= \frac{1}{2}(1 - \zeta)P_i(L_2 - L_1)P_j(2L_3 - 1)L_1L_2L_3 \\
H_{m(i,j)}^{(4,5,6)} &= \frac{1}{2}(1 + \zeta)P_i(L_2 - L_1)P_j(2L_3 - 1)L_1L_2L_3
\end{aligned}$$

where  $i, j = 0, 1, \dots, p - 3$ ,  $i + j = 0, 1, \dots, p - 3$  and  $P_i, P_j$  Legendre polynomials.

#### Square faces

$$\begin{aligned}
H_{m(i,j)}^{(1,2,5,4)} &= \varphi_i(L_2 - L_1)\phi_j(\zeta)L_1L_2 \\
H_{m(i,j)}^{(2,3,6,5)} &= \varphi_i(L_3 - L_2)\phi_j(\zeta)L_2L_3 \\
H_{m(i,j)}^{(3,1,4,6)} &= \varphi_i(L_1 - L_3)\phi_j(\zeta)L_3L_1
\end{aligned}$$

where  $i, j = 2, \dots, p - 2$ ,  $i + j = 4, \dots, p$ .

### E.11.4 Bubble basis

$$H_{m(i,j,k)}^{(0)} = \phi_k(\zeta) L_1 L_2 L_3 P_i(L_2 - L_1) P_j(2L_3 - 1)$$

where  $i, j = 0, \dots, p-5$ ,  $k = 2, \dots, p-3$ ,  $i+j+k = 2, \dots, p-3$ .

## Bibliography

- [1] Maplesoft home page. <http://www.maplesoft.com/>.
- [2] P.R.B. Devloo. On the definition of high order shape functions for finite elements. Available online: <http://www.fec.unicamp.br/~phil/downloads/shape.zip>.
- [3] B. Szabo and I. Babuska. *Finite Element Analysis*. John Wiley & Sons Ltd., 1991.
- [4] P. Šolin et al. *Higher-Order Finite Element Methods*. Chapman & Hall / CRC, 2004.



# Appendix F

## Face and edge elements

In Elmer the way to define a high-degree finite element discretization is based on the idea that a background mesh for representing the standard lowest-degree continuous finite element expansion is first provided and then additional degrees of freedom are introduced in order to enhance the approximation defined originally over the background mesh. The same idea has also been adapted to create other alternate finite element formulations. For example it is possible to enhance the approximation on the background mesh by introducing additional degrees of freedom associated with either faces or edges of the elements and omitting then the original nodal degrees of freedom. This leads to a suitable set of unknowns for creating discretizations based on the face or edge element interpolation. If  $L_2(\Omega)$  is used to denote the set of square-integrable scalar functions and  $\Omega \subset \mathbb{R}^d$ , we are thus led to bases for approximating vector fields in finite dimensional versions of the spaces

$$H(\text{div}, \Omega) = \{v \in L_2(\Omega)^d \mid \nabla \cdot v \in L_2(\Omega)\}$$

or

$$H(\text{curl}, \Omega) = \{v \in L_2(\Omega)^d \mid \nabla \times v \in L_2(\Omega)^d\}.$$

A physical motivation for using these spaces is that fields with only either normal or tangential continuity on boundaries can then be approximated in a natural manner. They may also be used to approximate various mixed variational formulations. In this appendix we shall detail the construction of available bases for defining face and edge interpolation elements.

### F.1 The construction of face element interpolation

Here we focus on the construction of finite element spaces  $X_h(\Omega) \subset H(\text{div}, \Omega)$  by using local spaces  $X(K)$  which are defined on elements  $K$  in the finite element mesh  $\mathcal{M}_h$  associated with the region  $\Omega$ . Then  $H(\text{div}, \Omega)$ -conforming approximations are obtained as members of the space

$$X_h = \{v_h \in H(\text{div}, \Omega) \mid v_h|_K \in X(K) \forall K \in \mathcal{M}_h\}.$$

We note that the functions belonging to  $X_h$  must have continuous normal components across interior element faces in the mesh  $\mathcal{M}_h$ .

Any real element  $K \subset \Omega$  is obtained as an image of a reference element  $\hat{K}$  under the element mapping  $f_K$  so that  $K = f_K(\hat{K})$ . The element space  $X(K)$  may now be defined via introducing a local space  $X(\hat{K})$  on the reference element and showing how the members of the reference element space  $X(\hat{K})$  are transformed in connection with the element mapping to obtain the basis for spanning  $X(K)$ . To this end, we use the Piola transformation so that the connection between the two element spaces is given by

$$X(K) = \{v_h \mid v_h(x) = \frac{1}{\det F(f_K^{-1}(x))} F(f_K^{-1}(x))(\hat{v}_h \circ f_K^{-1})(x), \text{ with } \hat{v}_h \in X(\hat{K})\}$$

where  $F = \nabla f_K$  is the gradient of  $f_K$  with respect to  $\hat{x}$ . It then follows that the basis functions for  $X(K)$  are obtained by applying the Piola transformation to the basis of  $X(\hat{K})$ .

Currently the Elmer solver contains the implementation of face element bases for triangular and tetrahedral elements. In the case of triangular elements the reference element is chosen to be the equilateral triangle, while tetrahedral elements use the regular tetrahedron as the reference element. These choices are convenient as using reference elements which have the faces of an equal size simplifies implementation. These reference elements have also been employed in connection with high-order elements. The element mapping  $f_K : \hat{K} \rightarrow \mathbb{R}^3$  is always defined in terms of the lowest-order Lagrange interpolation basis functions  $\hat{L}_j$  associated with the reference element as

$$x = f_K(\hat{x}) = \sum_j \hat{L}_j(\hat{x}) \nu_j,$$

where  $\hat{x}$  are the local coordinates to describe the reference element and the points  $\nu_j$  give the vertices of the real element  $K$ .

### F.1.1 The Raviart–Thomas space and its extension to three dimensions

In two dimensions ( $d = 2$ ) the simplest face element is the triangular Raviart–Thomas element of order  $k = 0$ . The reference element space is then chosen to be

$$X(\hat{K}) = RT_0(\hat{K}) = [P_0(\hat{K})]^d + \hat{x}P_0(\hat{K}) \quad (\text{F.1})$$

where  $\hat{x} = [\hat{x}_1 \ \hat{x}_2]^T$  and  $P_k(\hat{K})$  is the space of polynomials of at most degree  $k$  on  $\hat{K}$ . The dimension of  $X(\hat{K})$  is thus 3.

To define a basis for  $RT_0(\hat{K})$  each element face  $\hat{\mathcal{F}}_{ij}$  connecting the reference element vertices  $\hat{\nu}_i$  and  $\hat{\nu}_j$  is associated with one element basis function  $\hat{\psi}_{ij}$ . We choose

$$\begin{aligned} \hat{\psi}_{12} &= -\frac{1}{2} \begin{bmatrix} 0 \\ 1 \end{bmatrix} + \frac{1}{2\sqrt{3}} \begin{bmatrix} \hat{x}_1 \\ \hat{x}_2 \end{bmatrix}, \\ \hat{\psi}_{23} &= \frac{1}{2\sqrt{3}} \begin{bmatrix} 1 \\ 0 \end{bmatrix} + \frac{1}{2\sqrt{3}} \begin{bmatrix} \hat{x}_1 \\ \hat{x}_2 \end{bmatrix}, \\ \hat{\psi}_{31} &= -\frac{1}{2\sqrt{3}} \begin{bmatrix} 1 \\ 0 \end{bmatrix} + \frac{1}{2\sqrt{3}} \begin{bmatrix} \hat{x}_1 \\ \hat{x}_2 \end{bmatrix}. \end{aligned} \quad (\text{F.2})$$

A finite element expansion

$$\hat{v}_h(\hat{x}) = \hat{d}_{12}\hat{\psi}_{12}(\hat{x}) + \hat{d}_{23}\hat{\psi}_{23}(\hat{x}) + \hat{d}_{31}\hat{\psi}_{31}(\hat{x})$$

is referred to as the Raviart–Thomas interpolation function. Here the degrees of freedom  $\hat{d}_{ij}$  describe the flux across the element faces as

$$\hat{d}_{ij} = \int_{\hat{\mathcal{F}}_{ij}} \hat{v}_h(\hat{x}) \cdot \hat{n}(\hat{x}) \, d\hat{s},$$

where  $\hat{n}$  denotes the outward unit normal associated with the element face.

The construction of the Nédélec face elements of the first kind generalizes the use of the space (F.1) to three dimensions ( $d = 3$ ) with tetrahedral elements. If we introduce the Whitney form  $\hat{\phi}_{ijk}$  by

$$\hat{\phi}_{ijk} = \hat{\lambda}_i \nabla \hat{\lambda}_j \times \nabla \hat{\lambda}_k - \hat{\lambda}_j \nabla \hat{\lambda}_i \times \nabla \hat{\lambda}_k + \hat{\lambda}_k \nabla \hat{\lambda}_i \times \nabla \hat{\lambda}_j,$$

the reference element basis functions  $\hat{\psi}_{ijk}$  associated with the element faces  $\hat{\mathcal{F}}_{ijk}$  may be defined as

$$\hat{\psi}_{213} = -2\hat{\phi}_{123}, \quad \hat{\psi}_{124} = 2\hat{\phi}_{124}, \quad \hat{\psi}_{234} = 2\hat{\phi}_{234}, \quad \hat{\psi}_{314} = -2\hat{\phi}_{134},$$

so that

$$\begin{aligned} \hat{\psi}_{213} &= \begin{bmatrix} 0 \\ -\sqrt{6}/12 \\ -1/\sqrt{3} \end{bmatrix} + \frac{\sqrt{2}}{4} \begin{bmatrix} \hat{x}_1 \\ \hat{x}_2 \\ \hat{x}_3 \end{bmatrix}, \quad \hat{\psi}_{124} = \begin{bmatrix} 0 \\ -\sqrt{6}/4 \\ 0 \end{bmatrix} + \frac{\sqrt{2}}{4} \begin{bmatrix} \hat{x}_1 \\ \hat{x}_2 \\ \hat{x}_3 \end{bmatrix}, \\ \hat{\psi}_{234} &= \begin{bmatrix} \sqrt{2}/4 \\ 0 \\ 0 \end{bmatrix} + \frac{\sqrt{2}}{4} \begin{bmatrix} \hat{x}_1 \\ \hat{x}_2 \\ \hat{x}_3 \end{bmatrix}, \quad \hat{\psi}_{314} = \begin{bmatrix} -\sqrt{2}/4 \\ 0 \\ 0 \end{bmatrix} + \frac{\sqrt{2}}{4} \begin{bmatrix} \hat{x}_1 \\ \hat{x}_2 \\ \hat{x}_3 \end{bmatrix}. \end{aligned} \quad (\text{F.3})$$

The degrees of freedom associated with the corresponding finite element expansion  $\hat{v}_h(\hat{x})$  in terms of these basis functions are then characterized by

$$\hat{d}_{ijk} = \int_{\hat{\mathcal{F}}_{ijk}} \hat{v}_h(\hat{x}) \cdot \hat{n}(\hat{x}) d\hat{S}.$$

It can be verified that under the Piola transformation the basis functions of the reference element space  $X(\hat{K}) = RT_0(\hat{K})$  transform to a basis for  $X(K) = RT_0(K)$ . In addition, the degrees of freedom associated with the resulting basis functions  $\psi_{ij}$  or  $\psi_{ijk}$  are then characterized by

$$d_{ij} = \int_{\mathcal{F}_{ij}} v_h(x) \cdot n(x) ds \quad \text{or} \quad d_{ijk} = \int_{\mathcal{F}_{ijk}} v_h(x) \cdot n(x) dS.$$

In order to define a unique set of degrees of freedom for assembling global finite element equations, each element face in the mesh  $\mathcal{M}_h$  is associated with a uniquely defined unit normal  $m$ , so that either  $n(x) \cdot m(x) = 1$  or  $n(x) \cdot m(x) = -1$  for all  $x$  on the same element face. The degrees of freedom for assembling the global equations from elementwise contributions are then selected to be

$$D_{ij} = \int_{\mathcal{F}_{ij}} v_h(x) \cdot m(x) ds \quad \text{or} \quad D_{ijk} = \int_{\mathcal{F}_{ijk}} v_h(x) \cdot m(x) dS.$$

The restriction of the global finite element expansion  $v_h$  on the element can then be written in terms of the local basis functions and the global degrees of freedom as

$$v_h|_K = \sum d_{ij} \psi_{ij} = \sum D_{ij} (n \cdot m)_{x \in \mathcal{F}_{ij}} \psi_{ij}$$

or

$$v_h|_K = \sum d_{ijk} \psi_{ijk} = \sum D_{ijk} (n \cdot m)_{x \in \mathcal{F}_{ijk}} \psi_{ijk}.$$

In practice this is implemented by applying sign reversions to the local basis functions when  $n \cdot m = -1$ . It should be noted that the normal continuity of the resulting face element expansion is then in-built.

### F.1.2 The Brezzi-Douglas-Marini space and its extension to three dimensions

In the following we consider choosing the reference element space as  $X(\hat{K}) = [P_1(\hat{K})]^d$ . In two dimensions this choice leads to the construction of the Brezzi-Douglas-Marini space of order 1 (BDM<sub>1</sub>), while in three dimensions it brings us to the definition of the Nédélec face elements of the second kind.

It seems that ways to obtain computational bases for face element discretizations are far less standardized in comparison with implementing the basic element types. In Elmer we have followed the idea employed in [1] to obtain a basis for the reference element space. Each basis function may then be associated with a certain numerical integration point located on one of the element faces. The normal component of the basis function is normalized to yield the unity at the integration point to which the basis function is associated, while the normal component of this basis function is required to vanish at other integration points located on the element faces. It follows from this strategy that convenient integral descriptions of the degrees of freedom are also obtained.

For triangular elements the dimension of  $X(\hat{K})$  is 6 and hence two basis functions  $\hat{\psi}_{ij}^k$ ,  $k = 1, 2$ , are associated with each face  $\hat{\mathcal{F}}_{ij}$ . A possible choice would be to use  $\hat{\lambda}_i \text{rot} \lambda_j$  and  $\hat{\lambda}_j \text{rot} \lambda_i$  as these basis functions, but the basis functions implemented into Elmer are chosen to be their linear combinations such that the normal components of the resulting alternate basis functions satisfy the version of the Kronecker delta property explained above. We note that if the element face is parametrized as  $\hat{\mathcal{F}}_{ij} = \{ \hat{x} = s(\xi) \mid -1 \leq \xi \leq 1 \}$ , the two basis functions are associated with the Gaussian points  $\xi = -1/\sqrt{3}$  and  $\xi = 1/\sqrt{3}$ . It is also noted that the degrees of freedom associated with the face element interpolation function  $\hat{v}_h(\hat{x})$  can then be characterized by

$$\hat{d}_{ij}^k = \int_{\hat{\mathcal{F}}_{ij}} \hat{v}_h(\hat{x}) \cdot \hat{n}(\hat{x}) \hat{\phi}_k(\hat{x}) d\hat{S},$$

with  $\hat{\phi}_k(\hat{x})$  the linear Lagrange interpolation functions using the Gaussian points of the element face as the interpolation points.

The construction of the basis for the reference element space in three dimensions is analogous to the two-dimensional case. The dimension of  $X(\hat{K})$  is then 12 and each face  $\hat{\mathcal{F}}_{ijk}$  of the reference tetrahedron is associated with three basis functions. The basis functions  $\hat{\psi}_{ijk}^l$ ,  $l = 1, 2, 3$ , associated with each face  $\hat{\mathcal{F}}_{ijk}$  are determined as linear combinations of the alternate basis functions (see, for example, [2])  $\hat{\lambda}_k \nabla \hat{\lambda}_i \times \nabla \hat{\lambda}_j$ ,  $\hat{\lambda}_j \nabla \hat{\lambda}_i \times \nabla \hat{\lambda}_k$  and  $\hat{\lambda}_i \nabla \hat{\lambda}_j \times \nabla \hat{\lambda}_k$ . Parametrizing the element face in the coordinates  $\xi$  and  $\eta$  as shown in Figure E.5, the three basis functions for the element face are associated with the numerical integration points  $(-1/2, \sqrt{3}/6)$ ,  $(1/2, \sqrt{3}/6)$ , and  $(0, 2/\sqrt{3})$ . The degrees of freedom for the face element interpolation function  $\hat{v}_h(\hat{x})$  in terms of this basis may again be characterized as

$$\hat{d}_{ijk}^l = \int_{\hat{\mathcal{F}}_{ijk}} \hat{v}_h(\hat{x}) \cdot \hat{n}(\hat{x}) \hat{\phi}_l(\hat{x}) d\hat{S},$$

where  $\hat{\phi}_l(\hat{x})$  are the linear Lagrange interpolation functions using the numerical integration points of the element face as the interpolation points.

The Piola transformation is again used to transform the basis functions of the reference element space  $X(\hat{K}) = [P_1(\hat{K})]^d$  to a basis for  $X(K) = [P_1(K)]^d$ . Each element face in the mesh  $\mathcal{M}_h$  is also associated with a uniquely defined unit normal  $m$ , so that global finite element equations can be assembled using the unique set of degrees of freedom as explained in connection with the Raviart-Thomas element. Additionally an in-built mechanism is also applied to permute the order of basis functions so that the continuity of the normal components is maintained when elementwise contributions are assembled to the global linear system using the standard assembly subroutines of the Elmer solver.

### F.1.3 Using integration over the reference element

As with standard finite elements, it is convenient to convert integrals over elements  $K$  to integrals over the reference element  $\hat{K}$  in order to perform the numerical integration. Here the effect of using the Piola transformation needs to be taken into account and hence the implementation of elementwise integration is somewhat different as compared with using the standard transformation laws for the basic finite elements.

In the following  $u : K \rightarrow \mathbb{R}^d$  and  $v : K \rightarrow \mathbb{R}^d$  are the Piola transformations of  $\hat{u} : \hat{K} \rightarrow \mathbb{R}^d$  and  $\hat{v} : \hat{K} \rightarrow \mathbb{R}^d$ . A scalar field  $\phi : K \rightarrow \mathbb{R}$  is obtained from a field  $\hat{\phi} : \hat{K} \rightarrow \mathbb{R}$  via  $\phi(x) = (\hat{\phi} \circ f_K^{-1})(x)$ . In addition,  $\text{grad}$  and  $\text{div}$  are the gradient and divergence operators with respect to  $x$ , while  $\text{Grad}$  and  $\text{Div}$  are used to denote the gradient and divergence operators with respect to  $\hat{x}$ . The following transformation laws can then be used to convert integrals over elements  $K$  to integrals over the reference element  $\hat{K}$ :

$$\begin{aligned} \int_{\partial K} u(x) \cdot n(x) \phi(x) dS &= \int_{\partial \hat{K}} \hat{u}(\hat{x}) \cdot \hat{n}(\hat{x}) \hat{\phi}(\hat{x}) d\hat{S}, \\ \int_K u(x) \cdot v(x) d\Omega &= \int_{\hat{K}} F \hat{u}(\hat{x}) \cdot F \hat{v}(\hat{x}) \frac{1}{\det F} d\hat{\Omega}, \\ \int_K \text{div} u(x) \phi(x) d\Omega &= \int_{\hat{K}} \text{Div} \hat{u}(\hat{x}) \hat{\phi}(\hat{x}) d\hat{\Omega}, \\ \int_K u(x) \cdot \text{grad} \phi(x) d\Omega &= \int_{\hat{K}} \hat{u}(\hat{x}) \cdot \text{Grad} \hat{\phi}(\hat{x}) d\hat{\Omega}. \end{aligned} \tag{F.4}$$

### F.1.4 Examples

The classic Poisson equation

$$-\text{div grad } u = f \quad \text{on } \Omega$$

can be written as a mixed problem such that the problem consists of finding simultaneously  $u$  in  $L_2(\Omega)$  and the flux vector  $q = \text{grad } u$  in  $H(\text{div}, \Omega)$ . The files in the directories

- `../trunk/fem/tests/RaviartThomas2D`
- `../trunk/fem/tests/BDM2D`
- `../trunk/fem/tests/RaviartThomas3D`
- `../trunk/fem/tests/BDM3D`

contained in the source code repository of Elmer exemplify how the approximation of this mixed formulation can be implemented using the face elements which have been considered in this appendix.

## F.2 The construction of edge element interpolation

The definition of finite element spaces  $X_h(\Omega) \subset H(\text{curl}, \Omega)$  is also given by using local spaces  $X(K)$  so that  $H(\text{curl}, \Omega)$ -conforming approximations are obtained as members of the space

$$X_h = \{ v_h \in H(\text{curl}, \Omega) \mid v_h|_K \in X(K) \forall K \in \mathcal{M}_h \}.$$

We note that the functions belonging to  $X_h$  must now have continuous tangential components across interior element faces in the finite element mesh  $\mathcal{M}_h$  associated with the region  $\Omega$ .

The element space  $X(K)$  is again constructed via introducing a local space  $X(\hat{K})$  on the reference element and showing how the members of the reference element space  $X(\hat{K})$  are transformed in connection with the element mapping to obtain the basis for spanning  $X(K)$ . To this end, we use a transformation which is similar to the Piola transformation used in the construction of the face element interpolation. Here the connection between the two element spaces is given by

$$X(K) = \{ v_h \mid v_h(x) = [F(f_K^{-1}(x))]^{-T} \hat{v}_h(f_K^{-1}(x)), \text{ with } \hat{v}_h \in X(\hat{K}) \}.$$

It then follows that the basis functions for  $X(K)$  are obtained by applying the  $H(\text{curl})$ -version of the Piola transformation to the basis of  $X(\hat{K})$ .

### F.2.1 Triangular and tetrahedral edge elements of Nédélec's first and second family

In the case of triangular and tetrahedral elements the Nédélec edge elements of the first kind are based on choosing the reference element space as

$$X(\hat{K}) = [P_{k-1}(\hat{K})]^d + S_k(\hat{K}) \quad (\text{F.5})$$

where

$$S_k(\hat{K}) = \{ q \in [\tilde{P}_k]^d \mid q \cdot x = 0 \} \quad (\text{F.6})$$

with  $\tilde{P}_k$  the set of homogeneous polynomials of degree  $k$ , i.e. the span of monomials of degree  $k$ . On the other hand, the Nédélec edge elements of the second kind are obtained by selecting

$$X(\hat{K}) = [P_k(\hat{K})]^d. \quad (\text{F.7})$$

Currently the implementation of the triangular and tetrahedral Nédélec edge elements is restricted to the case of the lowest degree  $k = 1$ . In the case of Nédélec's first family each reference element edge  $\hat{\mathcal{E}}_{ij}$  connecting the reference element vertices  $\hat{\nu}_i$  and  $\hat{\nu}_j$  is associated with one basis function  $\hat{\psi}_{ij}$  which is defined such that, given a finite element expansion  $\hat{v}_h(\hat{x})$  in terms of these basis function, the associated degrees of freedom  $\hat{d}_{ij}$  satisfy

$$\hat{d}_{ij} = \int_{\hat{\mathcal{F}}_{ij}} \hat{v}_h(\hat{x}) \cdot \hat{t}(\hat{x}) d\hat{s},$$

where  $\hat{t}$  denotes the unit tangent vector associated with the element edge.

The  $H(\text{curl})$ -version of the Piola transformation is applied to transform the basis functions of the reference element space  $X(\hat{K})$  to a basis for  $X(K)$ . The degrees of freedom associated with the resulting basis functions  $\psi_{ij}$  are then characterized by

$$d_{ij} = \int_{\mathcal{E}_{ij}} v_h(x) \cdot t(x) ds,$$

with  $t$  the unit tangent vector that is oriented similarly with  $\hat{t}$ . In order to define a unique set of degrees of freedom for assembling global finite element equations, each element edge in the mesh  $\mathcal{M}_h$  is associated with a uniquely defined unit tangent  $\tau$ , so that either  $t(x) \cdot \tau(x) = 1$  or  $t(x) \cdot \tau(x) = -1$  for all  $x$  on the same element edge. The degrees of freedom for assembling the global equations from elementwise contributions are then selected to be

$$D_{ij} = \int_{\mathcal{E}_{ij}} v_h(x) \cdot \tau(x) ds.$$

The restriction of the global finite element expansion  $v_h$  on the element can then be written in terms of the local basis functions and the global degrees of freedom as

$$v_h|_K = \sum d_{ij} \psi_{ij} = \sum D_{ij} (t \cdot \tau)_{x \in \mathcal{E}_{ij}} \psi_{ij}.$$

In practice this is implemented by applying sign reversions to the local basis functions when  $t \cdot \tau = -1$ . It should be noted that the tangential continuity of the resulting edge element expansion is then in-built.

The strategy to construct basis functions for the Nédélec edge elements of the second kind is analogous to that described in Section F.1.2 for face elements. That is, each basis function is associated with a certain numerical integration point located on one of the element edges. The tangential component of the basis function is normalized to yield the unity at the integration point to which the basis function is associated, while the tangential component of this basis function is required to vanish at other integration points located on the element edges. Considering the lowest-degree case, in both two and three dimensions each element edge is associated with two basis functions (as the dimension of  $X(\hat{K})$  is 6 for the triangular element and 12 for the tetrahedral element). The degrees of freedom associated with the edge element interpolation function  $\hat{v}_h(\hat{x})$  can then be characterized by

$$\hat{d}_{ij}^k = \int_{\hat{\mathcal{E}}_{ij}} \hat{v}_h(\hat{x}) \cdot \hat{t}(\hat{x}) \hat{\phi}_k(\hat{x}) d\hat{s},$$

with  $\hat{\phi}_k(\hat{x})$  the linear Lagrange interpolation functions which use the Gaussian points of the element edge as the interpolation points.

The basis of the element space  $X(K)$  is again obtained via applying the adopted version of the Piola transformation. The global degrees of freedom are also defined in the same way as in the case of Nédélec's first family. In addition, an in-built mechanism is now applied to permute the order of basis functions so that the continuity of the tangential components is maintained when elementwise contributions are assembled to the global linear system using the standard assembly subroutines of the Elmer solver.

## F.2.2 Using integration over the reference element

The effect of the applied version of the Piola transformation needs to be taken into account when integrals over elements  $K$  are converted to integrals over the reference element  $\hat{K}$ . Therefore the implementation of elementwise integration is again somewhat different as compared with using the standard transformation laws for the basic finite elements.

In the following  $u : K \rightarrow \mathbb{R}^d$  and  $v : K \rightarrow \mathbb{R}^d$  are the transformations of  $\hat{u} : \hat{K} \rightarrow \mathbb{R}^d$  and  $\hat{v} : \hat{K} \rightarrow \mathbb{R}^d$  under the  $H(\text{curl})$ -version of the Piola transformation. A scalar field  $\phi : K \rightarrow \mathbb{R}$  is obtained from a field  $\hat{\phi} : \hat{K} \rightarrow \mathbb{R}$  via  $\phi(x) = (\hat{\phi} \circ f_K^{-1})(x)$ . In addition, the curl operator with respect to  $x$  is denoted by  $\text{curl}$ ,

while Curl is used to denote the curl operator with respect to  $\hat{x}$ . The following transformation laws can then be used to convert integrals over elements  $K$  to integrals over the reference element  $\hat{K}$ :

$$\begin{aligned} \int_{\partial K} u(x) \cdot t(x) \phi(x) dS &= \int_{\partial \hat{K}} \hat{u}(\hat{x}) \cdot \hat{t}(\hat{x}) \hat{\phi}(\hat{x}) d\hat{S}, \\ \int_K u(x) \cdot v(x) d\Omega &= \int_{\hat{K}} [F(\hat{x})]^{-T} \hat{u}(\hat{x}) \cdot [F(\hat{x})]^{-T} \hat{v}(\hat{x}) \det F(\hat{x}) d\hat{\Omega}. \end{aligned} \quad (\text{F.8})$$

In addition, the referential description of the field  $\text{curl } u(x)$  is given by

$$(\text{curl } u)(f_K(\hat{x})) = \frac{1}{\det F(\hat{x})} F(\hat{x}) \text{Curl } \hat{u}(\hat{x}). \quad (\text{F.9})$$

In two dimensions the only nontrivial component of the curl field transforms in particular as

$$(\text{curl } u \cdot e_3)(f_K(\hat{x})) = \frac{1}{\det F(\hat{x})} \text{Curl } \hat{u}(\hat{x}) \cdot \hat{e}_3. \quad (\text{F.10})$$

In view of (F.9), we thus have

$$\int_K \text{curl } u(x) \cdot \text{curl } v(x) d\Omega = \int_{\hat{K}} F(\hat{x}) \text{Curl } \hat{u}(\hat{x}) \cdot F(\hat{x}) \text{Curl } \hat{v}(\hat{x}) \frac{1}{\det F(\hat{x})} d\hat{\Omega}. \quad (\text{F.11})$$

## Bibliography

- [1] Ervin V. J. Computational bases for  $\text{RT}_k$  and  $\text{BDM}_k$  on triangles. *Computers & Mathematics with Applications*, 64:2765–2774, 2012.
- [2] Arnold D. N., Falk R. S., and Winther R. Geometric decompositions and local bases for spaces of finite element differential forms. *Computer Methods in Applied Mechanics and Engineering*, 198:1660–1672, 2009.

# Index

- dofs, 42
- global, 42
- nooutput, 42
  
- Adaptive Error Limit, 57
- Adaptive Error Measure, 36
- Adaptive Keep Smallest, 36
- Adaptive Max Change, 57
- Adaptive Max H, 57
- Adaptive Mesh Refinement, 57
- Adaptive Min H, 57
- Adaptive Min Timestep, 36
- Adaptive Remesh, 57
- Adaptive Save Mesh, 57
- Adaptive Time Error, 35
- Adaptive Timestepping, 35
- After Linsolve, 29
- algebraic multigrid, 21
- Anti Periodic BC VarName, 45
- Anti Rotational Projector, 47
- Anti Sliding Projector, 47
- Apply Limiter, 44
- Apply Mortar BCs, 47
  
- Backward Differences Formulae, 33
- bandwidth optimization, 26
- BDF, 33
- BDF Order, 34
- Before Linsolve, 29, 43
- BiCGstab( $\ell$ ), 24
- BiCGstab, biconjugate gradient stabilized, 24
- BiCGstabl polynomial degree, 25
- Binary output, 109
- Body, 8
- Body Force, 8, 43, 44, 48, 49
- BoomerAMG, 67
- BoomerAMG Coarsen Type, 67
- BoomerAMG Cycle Type, 68
- BoomerAMG Interpolation Type, 68
- Boomeramg Max Levels, 68
- BoomerAMG Num Functions, 68
- BoomerAMG Num Sweeps, 68
- BoomerAMG Relax Type, 67
- BoomerAMG Smooth Type, 68
- Bossak Alpha, 35
- Boundary Condition, 9, 43, 44, 47
- Boundary Condition bc\_id, 54
  
- Calculate Energy Norm, 49
- Calculate Loads, 48
- Calculate Weights, 49
- CG, conjugate gradient, 24
- CGS, conjugate gradient squared, 24
- Check Keywords, 11
- compilation instructions, 71
- component name, 41
- Compressed Row Storage, 28
- Constants, 8
- Convergence Tolerance, 31
- Coordinate Mapping(dim), 51
- Coordinate Scaling, 51
- Coordinate Transformation , 51
- Coordinate Transformation Radius, 51
- Crank-Nicolson method, 33
- Cuthill-McKee algorithm, 26
  
- Direct methods, 19
- direct solver, 24
- Dirichlet conditions, 42
- Discontinuous BC, 54
- Discontinuous Boundary, 54
- Discontinuous Boundary Greedy, 54
- Discontinuous Galerkin method, 64
- Discontinuous Target Body, 54
- domain decomposition, 60, 65
  
- Edge Basis, 47
- Eigen Analysis, 39
- Eigen System Complex, 39
- Eigen System Compute Residuals, 39
- Eigen System Convergence Tolerance, 39
- Eigen System Damped, 39
- Eigen System Lanczos Vectors, 39
- Eigen System Max Iterations, 39
- Eigen System Select, 39
- Eigen System Shift, 39
- Eigen System Use Identity, 39
- Eigen System Values, 39
- Eigenvalue problems, 37
- ElmerPost input file, 113
- ElmerSolver mesh file, 106
- Equation, 8



- error indicator, 55
- Exec Intervals, 41
- Exec Solver, 41
- Exported Variable i, 42
- Exported variables, 42
- Extruded Coordinate Index, 53
- Extruded Max Coordinate, 53
- Extruded Mesh Density, 53
- Extruded Mesh Levels, 53
- Extruded Mesh Ratio, 53
- Extruded Min Coordinate, 53
- GCR, generalized conjugate residual, 24
- geometric multigrid, 21
- Geometric Stiffness, 39
- GMRES, generalized minimal residual, 24
- Header, 8
- ILU preconditioners, 21
- ILU, incomplete LU-decomposition, 25
- Initial Condition, 9
- Initialization of dependent variables, 17
- Initialize Dirichlet Condition, 17
- iterative solver, 24
- keyword syntax, 12
- Krylov methods, 24
- Krylov subspace methods, 20
- LAPACK, 19
- Level Projector, 47
- Level Projector Extruded Edges Strong, 48
- Level Projector Nodes Strong, 48
- Level Projector Plane Edges Strong, 48
- limiter, 44
- Limiter Load Sign Negative, 44
- Limiter Load Tolerance, 44
- Limiter Value Tolerance, 44
- linear algebra, 19
- Linear System Abort Not Converged, 25
- Linear System Convergence Tolerance, 25
- Linear System Direct Method, 24
- Linear System GCR Restart, 25
- Linear System GMRES Restart, 25
- Linear System ILUT Tolerance, 25
- Linear System Iterative Method, 24
- Linear System Max Iterations, 25
- Linear System Precondition Recompute, 26
- Linear System Preconditioning, 25, 66, 67
- Linear System Residual Output, 25
- Linear System Solver, 24
- Linear System Symmetric, 43
- Linear System Timing, 49
- Linear System Timing Cumulative, 50
- Linear System Use Hypre, 66
- linear systems, 19
- lower limit, 44
- Lumped Mass Matrix, 35
- MATC, 11–13
  - parameterized keyword commands, 14
- Material, 8
- mesh database, 61
- Mesh DB, 9
- Mesh Grading Power, 52
- Mesh Keep, 52
- Mesh Keep Grading, 52
- Mesh Levels, 52
- mesh refinement, 55
- MG Cluster Alpha, 28
- MG Cluster Size, 28
- MG Convergence Tolerance, 26
- MG Direct Interpolate, 28
- MG Direct Interpolate Limit, 28
- MG Eliminate Dirichlet, 27
- MG Eliminate Dirichlet Limit, 27
- MG Equal Split, 26
- MG ILUT Tolerance, 27
- MG Levels, 26
- MG Lowest Linear Solver Limit, 27
- MG Max Iterations, 26
- MG Mesh Name, 26
- MG Positive Connection Limit, 27
- MG Post Smoothing Iterations, 27
- MG Pre Smoothing Iterations, 27
- MG Preconditioning, 27
- MG Projection Limit, 28
- MG Recompute Projector, 27
- MG Smoother, 26, 27
- MG SOR Relax, 27
- MG Strong Connection Limit, 27, 28
- MG Strong Connection Minimum, 28
- Mortar BC, 47
- Mortar BC Scaling, 47
- multigrid solver, 24
- Mumps, 20
- nodal loads, 48
- Nonlinear System Convergence Absolute, 31
- Nonlinear System Convergence Measure, 30
- Nonlinear System Convergence Tolerance, 31
- Nonlinear System Max Iterations, 31
- Nonlinear System Newton After Iterations, 31
- Nonlinear System Newton After Tolerance, 31
- Nonlinear System Norm Degree, 31
- Nonlinear System Norm Dofs, 31
- Nonlinear System Relaxation Factor, 31
- Nonlinear Update Exported Variables, 42
- nonlinearity, 30

Optimize Bandwidth, 26  
Output Intervals, 35  
  
Parasails, 66  
Pardiso, 20  
Periodic BC, 44  
Periodic BC Explicit, 44  
Periodic BC Rotate(3), 45  
Periodic BC Scale(3), 45  
Periodic BC Translate(3), 44  
Periodic BC Use Lagrange Coefficients, 45  
Periodic BC VarName, 45  
Periodic conditions, 44  
preconditioning, 21  
Preserve Baseline, 54  
Projector Skip Edges, 48  
Projector Skip Nodes, 48  
  
Radial Projector, 47  
Relaxation Factor, 31  
Restart Before Initial Conditions, 17  
Restart file, 16  
Restart Position, 16  
Rotational Projector, 47  
  
Save Projector, 48  
sif file, 8  
Simulation, 8, 51–54  
Sliding Projector, 47  
Solver, 9, 42–44, 47–49  
Solver activation, 41  
solver input file, 8  
    section names, 8  
Solver Timing, 50  
Solver Timing Cumulative, 50  
SOLVER.KEYWORDS, 11  
Stability Analysis, 39  
Start Time, 41  
Steady State Convergence Measure, 31  
Steady State Convergence Tolerance, 32  
Steady State Max Iterations, 32  
Steady State Min Iterations, 32  
Steady State Norm Degree, 31  
Steady State Norm Dofs, 31  
Steady State Relaxation Factor, 32  
Stop Time, 41  
SuperLU, 20  
  
Target Boundaries(n), 43  
Target Coordinates(n,DIM), 43  
Target Nodes(n), 43  
Time Derivative Order, 34  
time-dependent, 33  
timeintegration, 33  
Timestep Function, 35  
Timestep Intervals, 35  
Timestep Sizes, 35  
Timestepping Method, 34  
  
Umfpack, 19  
Update Exported Variables, 42  
upper limit, 44  
  
Variable name, 41  
Varname, 43  
Varname Condition, 43  
Varname i, 43  
Varname Load , 48  
Varname Lower Limit, 44  
Varname Passive, 49  
Varname Upper Limit, 44